


Prepared For:
 CITY OF OCALA
 John King
 P O BOX 1270
 OCALA, FL 34478-1270
 (352)351 - 6762
 Reference ID: Water Dept

Presented By:
 CUMBERLAND INTERNATIONAL TRUCKS, FL
 Erick Creasey
 5221 WEST HIGHWAY 40
 OCALA FL 34482 -
 (352)732-8151

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

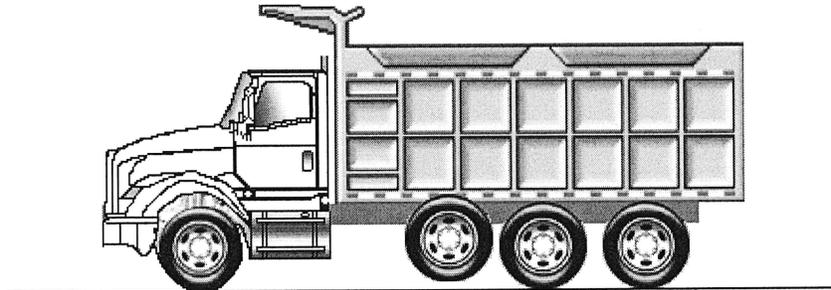

Model Profile
2026 HX620 SBA (HX620)

AXLE CONFIG:	6X4
APPLICATION:	Construction Dump
MISSION:	Requested GVWR: 72000. Calc. GVWR: 73000. Calc. GCWR: 140000 Calc. Start / Grade Ability: 20.58% / 2.23% @ 55 MPH Calc. Geared Speed: 82.6 MPH
DIMENSION:	Wheelbase: 207.00, CA: 138.00, Axle to Frame: 55.00
ENGINE, DIESEL:	{Cummins X15 450V} Productivity Series, EPA 2024, 450HP @ 1900 RPM, 1650 lb-ft Torque @ 900 RPM, 2000 RPM Governed Speed, 461 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 4000 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
AXLE, REAR, TANDEM:	{Meritor RT-46-160} Single Reduction, 46,000-lb Capacity, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends Gear Ratio: 4.56
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 425/65R22.5 Load Range L HAC 3 (CONTINENTAL), 465 rev/mile, 68 MPH, All-Position
TIRE, REAR:	(8) 11R22.5 Load Range G DH37 (HANKOOK), 498 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, TANDEM:	{Hendrickson HMX EX 460} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with Transverse Torque Rods, Rubber End Bushings
PAINT:	Cab schematic 100LZ Location 1: 9219, Winter White (Std) Chassis schematic N/A

**Vehicle Specifications
2026 HX620 SBA (HX620)**

October 06, 2025

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
HX62000	Base Chassis, Model HX620 SBA with 207.00 Wheelbase, 138.00 CA, and 55.00 Axle to Frame.	9356/6680	16036
1652	CROSSMEMBER, REAR Relocated to End of Frame	-8/73	65
1AMR	CROSSMEMBER, FRAME TIE for Standard Duty	39/3	42
1AND	AXLE CONFIGURATION 6x4	0/0	0
1CGD	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 12.50" x 3.750" x 0.500" (317.5mm x 95.25mm x 12.7mm); 480.8" (12212mm) Maximum OAL	292/344	636
1LEH	LICENSE PLATE HOLDER Single Plate, Swing Type, Mounted Below Front Bumper	1/0	1
1LRB	BUMPER, FRONT Contoured, Steel, Painted, Heavy Duty, for HX	0/0	0
1VBC	TOW PIN, FRONT Heavy Duty; 150,000-lb. Total Capacity	91/-17	74
1WXL	WHEELBASE RANGE 191" (485cm) Through and Including 236" (600cm)	105/-105	0
2ARY	AXLE, FRONT NON-DRIVING {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity	126/0	126
3770	SPRINGS, FRONT AUXILIARY Rubber	21/0	21
3AGR	SUSPENSION, FRONT, SPRING Two Stage Multileaf, Shackle Type, 20,000-lb Capacity, Less Shock Absorbers	-16/0	-16
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	0/0	0
4AZJ	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System, with Automatic Traction Control	0/0	0
4EDM	AIR DRYER {Bendix AD-HF} with Heater, Includes Pressure Protection Circuits, Safety Valve, Integral Purge Tank, Governor Pressure Settings 110 psi Cut-In/130 psi Cut-Out, Integrated PuraGuard Coalescing Filtration	0/0	0
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 SqIn Spring Brake	0/14	14
4EXV	BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn	4/0	4
4GBM	BRAKE, PARKING Manual Push-Pull Pneumatic Parking Brake	1/0	1
4JBR	BRAKES, PUSHER AXLE Air S-Cam Type, 15" x 4.0", Includes MGM 20 Sq.In. Brake Chambers, Furnished with One Pusher Lift Axle	0/0	0
4JNJ	SLACK ADJUSTER, PUSHER AXLE {Haldex} Automatic; for Single Pusher Axle	0/0	0
4LAA	SLACK ADJUSTERS, FRONT {Haldex} Automatic	14/0	14
4LGA	SLACK ADJUSTERS, REAR {Haldex} Automatic	0/32	32
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM	0/0	0
4VKC	AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab	0/0	0
4VKK	AIR TANK LOCATION (2) Mounted Under Battery Box, Outside Right Rail, Back of Cab, Perpendicular to Rail	0/0	0
4WDW	BRAKE CHAMBERS, POSITION on Rear/Rear Axle Located Inside Rear Tire Envelope (Meets Asphalt Spreader/Paver Clearance Requirements)	0/0	0
4WXZ	DRAIN VALVE {Bendix DV-2} (2) Automatic, with Heater, for Air Tank	1/0	1

**Vehicle Specifications
2026 HX620 SBA (HX620)**

October 06, 2025

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
4XDR	BRAKES, REAR {Meritor 16.5X7 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 7", 23,000-lb Capacity per Axle	0/104	104
4XDT	BRAKES, FRONT {Meritor 16.5X6 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 6", 23,000-lb Capacity	33/0	33
4XEE	PARK BRAKE CHAMBERS, ADDITIONAL (2) Spring Brake Type	0/60	60
5710	STEERING COLUMN Tilting and Telescoping	0/0	0
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black	0/0	0
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power	108/-12	96
6DGU	DRIVELINE SYSTEM {Dana Spicer} SPL250 Main Driveline with SPL170 Interaxle Shaft, for 6x4	2/5	7
7BEU	AFTERTREATMENT COVER Aluminum	0/0	0
7BLY	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Cab Mounted Right Side	0/0	0
7SAP	ENGINE COMPRESSION BRAKE {Cummins} Interbrake For Cummins Signature/ ISX/X15 Engines; Furnished with Engine	0/0	0
7WBS	MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel	20/11	31
7WDM	EXHAUST HEIGHT 10'	0/0	0
7WDT	TAIL PIPE (1) Straight Type	0/0	0
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment	0/0	0
8653	HORN, AIR Single, Located Under Cab	0/0	0
8GXJ	ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount	0/0	0
8HAE	BODY BUILDER WIRING Rear of Frame; Includes Sealed Connectors for Tail/ Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn	3/0	3
8MSG	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud	0/0	0
8RBZ	SPEAKER, AUXILIARY, CB RADIO with Jack for CB; Mounted Left Side Above Driver's Door	0/0	0
8RMZ	SPEAKERS (2) 6.5" Dual Cone Mounted in Both Doors, (2) 5.25" Dual Cone Mounted in Both B-Pillars	0/0	0
8RNB	CB RADIO Accommodation Package, Header Mounted, Feeds from Accessory Side of Ignition Switch, Includes Power Source, One Antenna and Antenna Base with Wiring on Left Side Mirror	0/0	0
8RPR	ANTENNA for Increased Roof Clearance Applications	1/0	1
8RPS	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/Auxiliary Input	3/0	3
8VAY	HORN, ELECTRIC Disc Style	0/0	0
8VUK	BATTERY BOX Aluminum, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Right Side Back of Cab	0/0	0
8WBW	JUMP START STUD 12V, Remote Mounted	2/0	2

**Vehicle Specifications
2026 HX620 SBA (HX620)**

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
8WDG	BACK-UP ALARM {Preco 1059} Electronic; Solid State, Dual Function, 112 dBA	0/1	1
8WEZ	TURN SIGNAL SWITCH Self-Canceling	0/0	0
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights	0/0	0
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn On if Windshield Wipers are Turned On	0/0	0
8WXB	HEADLIGHT WARNING BUZZER Sounds When Head Light Switch is on and Ignition Switch is in "Off" Position	0/0	0
8WXD	ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, with Ignition "OFF" and any Door Opened	0/0	0
8WYG	STARTING MOTOR {Mitsubishi Electric Automotive America 105P} 12-Volt, with Soft-Start	0/0	0
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses	0/0	0
8XNY	HEADLIGHTS Halogen	0/0	0
8XPB	POWER SOURCE, ADDITIONAL Auxiliary Power Outlet (APO) with USB-A Port and USB-C Port, Located in the Instrument Panel	0/0	0
8XPN	USB PORT One USB-A Port and One USB-C Port, Located in Instrument Panel	0/0	0
9585	FENDER EXTENSIONS Rubber	18/0	18
9AAB	LOGOS EXTERIOR Model Badges	0/0	0
9AAE	LOGOS EXTERIOR, ENGINE Badges	0/0	0
9ASE	FRONT END Tilting, Composite	0/0	0
9HCL	GRILLE Black Vertical Accent Bars, with Black Mesh	0/0	0
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100	0/0	0
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
10AGB	COMMUNICATIONS MODULE Telematics Device with Over the Air Programming; Includes Five Year Data Plan and International 360	0/0	0
10UAV	VEHICLE REGISTRATION IDENTITY ID for Non-CARB Omnibus and/or Non-ACT Adopting State or Exempt Vehicle. Not for use on vehicles registering in CA/MA / OR/NJ/NY/WA. Contains non-mitigated legacy engine & cannot be registered in CA unless exempt. You may be held liable under state law for failure to properly register vehicle.	0/0	0
10WCY	SAFETY TRIANGLES	5/1	6
10WKN	KEYS - ALL ALIKE, ID I-1624 Compatible with Z-250	0/0	0
10XBG	SPECIAL RATING, GVWR Limited to 73,000-lb GVWR	0/0	0
11001	CLUTCH Omit Item (Clutch & Control)	-114/-20	-134
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection	0/0	0
12EWW	ENGINE, DIESEL {Cummins X15 450V} Productivity Series, EPA 2024, 450HP @ 1900 RPM, 1650 lb-ft Torque @ 900 RPM, 2000 RPM Governed Speed, 461 Peak HP (Max)	595/38	633

Vehicle Specifications
2026 HX620 SBA (HX620)

October 06, 2025

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
12THT	FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed	0/0	0
12VCA	AIR CLEANER Single Element, with Pre-Cleaner, Engine Mounted	0/0	0
12VJZ	EMISSION, CALENDAR YEAR {Cummins X15} EPA, OBD and GHG Certified for Calendar Year 2025	0/0	0
12WGA	HOSE CLAMPS, RADIATOR HOSES , Mechanical Type; with Constant-Tension Functionality	0/0	0
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted	0/0	0
12WVH	EPA IDLE COMPLIANCE Low NOx Idle Engine, Complies with EPA Clean Air Regulations; Includes "Certified Clean Idle" Decal on Door	0/0	0
12WYZ	RADIATOR DRAIN & FILL FITTING SPECIAL; To Vacuum Out or Fill the Cooling System from the Bottom of Radiator, for Use with Quick-Connect Radiator Drain Tool or Shop Coolant Evacuation-Fill System	0/0	0
12WZE	CARB IDLE COMPLIANCE Does Not Comply with California Clean Air Idle Regulations	0/0	0
12XBC	RADIATOR Aluminum, Welded, Down Flow, Front to Back System, 1325 SqIn, with 806 SqIn Charge Air Cooler	0/0	0
12XCS	CARB EMISSION WARR COMPLIANCE Does Not Comply with CARB Emission Warranty	0/0	0
13BDY	TRANSMISSION, AUTOMATIC {Allison 4000 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway	292/79	371
13WCU	OIL COOLER, TRANSMISSION {Modine} Remote Mounted; Not for use with Retarder, for Automatic Transmission	42/-6	36
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission	1/0	1
13WLM	TRANSMISSION OIL Synthetic; 63 thru 76 Pints	0/0	0
13WUC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS) and Regional Haul Series (RHS), General Purpose Trucks, Construction, Package Number 223	0/0	0
13WVV	NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released	0/0	0
13WYU	SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, Performance Programming	0/0	0
14HRM	AXLE, REAR, TANDEM {Meritor RT-46-160} Single Reduction, 46,000-lb Capacity, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends . Gear Ratio: 4.56	0/425	425
14RBC	AXLE, LIFT, CONTROLS for One Lift Axle; All Controls Inside Cab; Includes Pressure Gauge, Pressure Regulator Switch, Lift/Lower Switch, Inside Cab on Dash	0/0	0
14UAB	AXLE SPACING, FIRST PUSHER 49" Ahead of Drive Axle	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
14UMX	SUSPENSION, REAR, TANDEM {Hendrickson HMX EX 460} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with Transverse Torque Rods, Rubber End Bushings	0/9	9
14WBA	LIFT AXLE ENGR REVIEW Special Quotation to Allow Engineering Review of Lift Axle Configurations	0/0	0
14WBN	DIFF. SWITCH CONTROLS Two Independent Switches for Control Traction Differentials on Tandem Rear Axles, Mounted on Dash	1/0	1
14WBV	SHOCK ABSORBERS, REAR (4) for Hendrickson HMX Suspension Only, Mounted from Frame to Beam	0/31	31
14WCP	TORQUE RODS {Hendrickson} TRAAX Rods, Longitudinal Only	0/-6	-6
14WCR	TRANSVERSE TORQUE RODS {Hendrickson} TRAAX Rod, Transverse Only	0/-4	-4
14WNH	AXLE, PUSHER, LIFT TYPE {Watson & Chalin SL1190SSR Tru-Trk Alumilite} 13,500-lb Capacity, One Self-Steer Axle	301/518	819
14WZY	AXLE SHAFT MODIFICATION Axle Shaft Flanges Modified for 0.625" Diameter Drive Studs with Solid Type Cone-Locks	0/0	0
15LNA	FUEL HEATER PLUMBING {Cummins} Plumbing for Thermal Recirculation Valve (TRV) Mounted to Cummins X15 Engines, Thermostatically Controlled	0/0	0
15LPU	FUEL/WATER SEPARATOR {Racor 6600} Pre-Filter and Filter Base, Includes Water-in-Fuel Sensor	-3/0	-3
15SHC	FUEL TANK Non-Polished Aluminum, 24" Dia, 100 US Gal (379L), Mounted Left Side, Under Cab	22/32	54
15WEY	DEF TANK 10.8 US Gal (41L) Capacity, Frame Mounted Outside Left Rail, Under Cab	0/0	0
16030	CAB Conventional, Day Cab	0/0	0
16BAM	AIR CONDITIONER with Integral Heater and Defroster	0/0	0
16GEG	GAUGE CLUSTER Premium Level; English with English Electronic Speedometer	0/0	0
16GHU	GRAB HANDLE, CAB INTERIOR (2) Safety Yellow	0/0	0
16HGH	GAUGE, OIL TEMP, AUTO TRANS for Allison Transmission	1/0	1
16HGN	GAUGE, AIR APPLICATION	1/0	1
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} Mounted in Instrument Panel	2/0	2
16HKA	IP CLUSTER DISPLAY Omit Display of Fault Codes in Instrument Cluster and Disable Blink Codes, Requires Service Tool to Retrieve and View Fault Code	0/0	0
16LUM	SEAT, PASSENGER {National} Non Suspension, High Back with Integral Headrest, Vinyl, with Fixed Back, with Under Seat Storage	30/10	40
16LWK	SEAT, DRIVER {ISRI} Series 300, Air Suspension, High Back, Vinyl, Single Chamber Lumbar, Inboard Armrest, Suspension Cover, Fore/Aft Isolator, Cushion Extension, Seat Tilt	0/0	0
16SDC	GRAB HANDLE, EXTERIOR (2) Chrome, Towel Bar Type, with Anti-Slip Rubber Inserts, for Cab Entry Mounted Left and Right Side at B-Pillar	6/0	6
16SNP	MIRRORS (2) C-Loop, Power Adjust, Heated, Black Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width	3/0	3

Vehicle Specifications
2026 HX620 SBA (HX620)

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
16VKK	CAB INTERIOR TRIM Diamond, for Day Cab	0/0	0
16VLV	MONITOR, TIRE PRESSURE Omit	-10/-1	-11
16WHJ	HOSE CLAMPS, HEATER HOSE {Breeze} Belleville Washer Type	0/0	0
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature	0/0	0
16WLS	FRESH AIR FILTER Attached to Air Intake Cover on Cowl Tray in Front of Windshield Under Hood	0/0	0
16XJP	INSTRUMENT PANEL Wing Panel	0/0	0
16XRX	MODESTY PANEL Painted	0/0	0
16XTM	ACCESS, CAB Aluminum, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab or Sleeper Cab	0/0	0
27DHK	WHEELS, FRONT DISC; 22.5x12.25 Rims, Non-Polished Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	0/0	0
28DUK	WHEELS, REAR {Accuride 29169} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and Steel Hubs	0/88	88
29ACD	TIRE VALVE CAP Flo-Thru Design	0/0	0
34ACJ	WHEELS, LIFT AXLE PUSHER {Accuride 51408} Single Wheels, For One Lift Axle; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut << Pricing Includes Standard Tires >>	100/260	360
7372135810	(8) TIRE, REAR 11R22.5 Load Range G DH37 (HANKOOK), 498 rev/mile, 75 MPH, Drive	0/-16	-16
7702495809	(2) TIRE, PUSHER 295/75R22.5 Load Range G AH37 (HANKOOK), 513 rev/mile, 75 MPH, All-Position	0/0	0
7752665441	(2) TIRE, FRONT 425/65R22.5 Load Range L HAC 3 (CONTINENTAL), 465 rev/mile, 68 MPH, All-Position	112/0	112
Services Section:			
40132	WARRANTY Standard for HX520, HX620, Effective with Vehicles Built January 1, 2021 or Later, CTS-2015B	0/0	0
Total Component Weight:		11604/8631	20235
		(lbs)	(lbs)
1	16'Aluminum 20YD dump Body by Rogers water tight	0/0	0
Total Body Allied:		0/0	0
		(lbs)	(lbs)
FSA fees		0/0	0
Total Goods Purchased:		0/0	0

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.

(US DOLLAR)

Description

Price

Net Sales Price:

\$230,420.90

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described herein are Navistar, Inc.'s standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.

10/7/2025

Cumberland

TRUCK / IDEALEASE / BUS / FIRE / SPOTTER

CUMBERLAND-COMPANIES.COM

◆ 2017 AND 2018 DEALER OF THE YEAR

Florida Sheriff's Association Contract- BidFSA25-VEH23.0

Customer: City of Ocala
Date of Quote: 10/6/2025

Specification:	77	Region:	Central	Quantity	Unit Cost	extended
Base Price:	2026 INTERNATIONAL HX			1	\$ 136,800.00	\$ 136,800.00
Contract Options:						
1VBC	Front Tow Pin			1	\$ 586.60	\$ 586.60
1WXL	Wheel base range			1	\$ 443.10	\$ 443.10
2ARY	20,000 front axle			1	\$ 1,715.00	\$ 1,715.00
3AGA	20,000 front suspension			1	\$ 506.80	\$ 506.80
5PTB	Dual steering gears			1	\$ 811.30	\$ 811.30
8RPS	Bluetooth radio			1	\$ 338.10	\$ 338.10
12EWX	Cummins X15 450 HP engine			1	\$ 6,995.80	\$ 6,995.80
13BDY	Allison 4000 RDS transmission			1	\$ 12,646.90	\$ 12,646.90
13WVV	Neutral at stop			1	\$ 507.50	\$ 507.50
14HRM	46,000 rear axle with driver controlled diff locks			1	\$ 3,930.50	\$ 3,930.50
14UMX	46,000 rear suspension			1	\$ 814.80	\$ 814.80
14WNH	Steerable lift axle with tires and wheels			1	\$ 8,872.50	\$ 8,872.50
15SJR	100 gallon fuel tank			1	\$ 432.60	\$ 432.60
16SNR	Power mirrors			1	\$ 466.90	\$ 466.90
27DHK	22.5x 12.25 front wheels			1	\$ 752.50	\$ 752.50
RALD166	Rogers 16' aluminum dump body water tight.			1	\$ 53,550.00	\$ 53,550.00
Safety	Safety kit			1	\$ 250.00	\$ 250.00

NON Contract Options

\$ -

Total:

\$ 230,420.90 \$ 230,420.90

Total Purchase Order Amount:

\$ 230,420.90

Cab Color:	WHITE
Body Color:	Natural

**included in base price

Prepared By:

Erick Creasey

Cumberland International Trucks LLC 2110 S Division Ave Orlando FL 32805

Cell- 615-486-1797 / fax - 407.295.9727 / email - ecreasey@cltte.com