



**AGREEMENT FOR SHIP/HOME/CDBG HOUSING REHABILITATION**

THIS AGREEMENT FOR SHIP/HOME/CDBG HOUSING REHABILITATION ("Agreement") is entered into by and between the **CITY OF OCALA**, a Florida municipal corporation ("City"), **DARRELL WILLIAMS** ("Owner"), and **BRUCE WAYNE WILEY, LLC**, a limited liability company duly organized and authorized to do business in the state of Florida (EIN: 47-1267940) ("Contractor").

**RECITALS:**

**WHEREAS**, on March 22, 2024, City issued an Invitation to Bid ("ITB") for the provision of rehabilitation work on a residential home located at 1114 NW 13<sup>th</sup> Avenue, Ocala Florida 34475, ITB No.: CDS/240558 (the "Solicitation"); and

**WHEREAS**, two (2) firms responded to the Solicitation and, after consideration of price and other evaluation factors set forth in the Solicitation, Bruce Wayne Wiley, LLC was chosen as the intended awardee to perform rehabilitation work on a residential home located at 1114 NW 13<sup>th</sup> Avenue, Ocala Florida 34475, (the "Project"); and

**WHEREAS**, Contractor certifies that Contractor and its subcontractors, if any, are qualified and possess the required licensure and skill to perform the work required for the Project; and

**NOW THEREFORE**, in consideration of the foregoing recitals, the following mutual covenants and conditions, and other good and valuable consideration, City and Contractor agree as follows:

**TERMS OF AGREEMENT:**

1. **RECITALS.** City and Contractor hereby represent, warrant, and agree that the Recitals set forth above are true and correct and are incorporated herein by reference.
2. **CONTRACT DOCUMENTS.** The Contract Documents which comprise the entire understanding between City and Contractor shall only include: (a) this Agreement; (b) those documents listed in this section as Exhibits to this Agreement; (c) the City's Solicitation for the Project and the bid submitted by Contractor in response to same (the "Solicitation Documents"); and (d) those documents identified in the Project Specifications section of this Agreement. Each of these documents are incorporated herein by reference for all purposes.

If there is a conflict between the terms of this Agreement and the Contract Documents, then the terms of this Agreement shall control, amend, and supersede any conflicting terms contained in the remaining Contract Documents.

A. **Exhibits to Agreement:** The Exhibits to this Agreement are as follows:

- Exhibit A: Scope of Work (A-1 through A-5)
- Exhibit B: Price Proposal (B-1)
- Exhibit C: Work Write Up (C-1 through C-13)
- Exhibit D: Asbestos Survey Report (D-1 through D-23)

If there is a conflict between the individual Exhibits regarding the scope of work to be performed, then any identified inconsistency shall be resolved by giving precedence in the following order: (1) Exhibit A; then (2) Exhibit B; then (3) Exhibit C; then (4) Exhibit D.

3. **SCOPE OF SERVICES.** Contractor shall provide all materials, labor, supervision, tools, accessories, equipment, permits, fees, testing, inspections, certifications, and all other things necessary for Contractor to perform its obligations under this Agreement as set forth in the attached **Exhibit A - Scope of Work** and the Contract Documents. The Scope of Work under this Agreement may only be adjusted by written amendment executed by both parties.
4. **PROJECT SPECIFICATIONS.** This project will require the Contractor to have the following specifications and documents, which are incorporated by reference:
  - A. **City of Ocala Rehabilitation Standards Manual** available at: <https://www.ocalafl.org/home/showpublisheddocument/504/637545378827730000>;
  - B. **City of Ocala Metering Enclosure and Equipment Standards** available at: <https://www.ocalafl.org/home/showpublisheddocument/328/637632311592430000>;
  - C. **Florida Building Code (Most Recent Edition)** available at: <https://floridabuilding.org/c/default.aspx>.
  - D. **City of Ocala Standard Specifications for Construction (January 11, 2024)**, available at: [www.ocalafl.gov/home/showpublisheddocument/24606](http://www.ocalafl.gov/home/showpublisheddocument/24606)

In the event of a conflict between the individual Project Specifications regarding the scope of work to be performed, then the specification with the more restrictive provision shall take precedence over the others.

5. **COMPENSATION.** City shall pay Contractor, on behalf of Owner, a maximum limiting amount of **ONE HUNDRED SIXTY-EIGHT THOUSAND, ONE HUNDRED FORTY-TWO AND NO/100 DOLLARS (\$168,142)** (the "Contract Sum") as full and complete compensation for the timely and satisfactory completion of the work in compliance with the Contract Documents. The Contract Sum under this Agreement may only be adjusted by written amendment executed by both parties.
  - A. **Monthly Progress Payments:** The compensation amount under this section shall be paid by City, monthly, based upon a percentage of completion of the work as invoiced by Contractor and approved by City. The compensation sought under this Agreement is subject to the express terms of this Agreement and any applicable Federal and/or state laws.
  - B. **Project Schedule and Progress Reports.** A progress report and updated project schedule must be submitted with each monthly pay request indicating the percent of services completed to date. This report will serve as support for payment to Contractor and the basis for payment in the event project is suspended or abandoned.
  - C. **Invoice Submission.** Contractor must invoice at least once a month. All invoices submitted by Contractor shall include the City Contract Number, an assigned Invoice

Number, and an Invoice Date. Contractor shall be provided with a cover sheet for invoicing. This cover sheet must be filled out correctly and submitted with each invoice. Contractor shall submit the original invoice through the responsible City Project Manager at: **City of Ocala Community Development Services Department**, Attn: **Chris Lewis**, E-Mail: [clewis@ocalafl.gov](mailto:clewis@ocalafl.gov) Telephone: **352-629-8333** or **Shaneka Greene** E-Mail: [sgreene@ocalafl.gov](mailto:sgreene@ocalafl.gov) Telephone: **352-629-8261** Address: **201 SE 3<sup>rd</sup> Street 2<sup>nd</sup> Floor, Ocala, Florida 34471**,

- D. **Payment of Invoices by City.** The City Project Manager must review and approve all invoices prior to payment. City Project Manager's approval shall not be unreasonably withheld, conditioned, or delayed. Payments by City shall be made no later than the time periods established in section 218.735, Florida Statutes.
- E. **Withholding of Payment.** City reserves the right to withhold, in whole or in part, payment for any and all work that: (i) has not been completed by Contractor; (ii) is inadequate or defective and has not been remedied or resolved in a manner satisfactory to the City Project Manager; (iii) which fails to comply with any term, condition, or other requirement under this Agreement; or for (iv) representations provided in Contractor's billing statements that are wholly or partially inaccurate. Any payment withheld shall be released and remitted to Contractor within **THIRTY (30)** calendar days of the Contractor's remedy or resolution of the inadequacy or defect.
- F. **Excess Funds.** If due to mistake or any other reason Contractor receives payment under this Agreement in excess of what is provided for by the Agreement, Contractor shall promptly notify City upon discovery of the receipt of the overpayment. Any overpayment shall be refunded to City within **THIRTY (30)** days of Contractor's receipt of the overpayment or must also include interest calculated from the date of the overpayment at the interest rate for judgments at the highest rate as allowed by law.
- G. **Amounts Due to the City.** Contractor must be current and remain current in all obligations due to the City during the performance of services under this Agreement. Payments to Contractor may be offset by any delinquent amounts due to the City or fees and/or charges owed to the City.
- H. **Tax Exemption.** City is exempt from all federal excise and state sales taxes (State of Florida Consumer's Certification of Exemption 85-8012621655C-9). The City's Employer Identification Number is 59-60000392. Contractor shall not be exempted from paying sales tax to its suppliers for materials to fulfill contractual obligations with the City, nor will Contractor be authorized to use City's Tax Exemption Number for securing materials listed herein.
6. **TIME FOR PERFORMANCE.** Time is of the essence with respect to the performance of all duties, obligations, and responsibilities set forth in this Agreement and the Contract Documents.
- A. The required start time after the City-issued Notice to Proceed (NTP) shall be a maximum of **TEN (10)** calendar days for work to begin. Work will be completed and ready for final payment within **NINETY (90)** days from the date of issuance of a Notice to Proceed for the project by City.

- B. **Weather Days.** Contractor shall submit a written request to the City Project Manager (email is the preferred method) for additional days for which work is suspended or delayed by weather. Weather days shall be reconciled with each monthly pay application for the time period in which the application is submitted and shall be final. Contractor performance and execution of work will be considered in the determination for granting additional days.
  - C. **Lead Time.** The maximum acceptable lead time on materials is two (2) weeks. The City shall issue a Notice to Proceed (NTP) upon notification of the receipt of materials by the Contractor.
  - D. The Time for Performance under this Agreement may only be adjusted by Change Order, in the sole and absolute discretion of City. Any request for an extension of the Time for Performance must be submitted in a writing delivered to the City Project Manager, along with all supporting data, within **THREE (3)** calendar days of the occurrence of the event giving rise to the need for adjustment unless the City allows an additional period of time to ascertain more accurate data. All requests for adjustments in the Contract Time shall be determined by City.
  - E. As to any delay, inefficiency, or interference in this performance of this Agreement caused by any act or failure to act by City, the Contractor's sole remedy shall be the entitlement of an extension of time to complete the performance of the affected work in accordance with the Contract Documents. Contractor agrees to make no claim for extra or additional costs attributable to said delays, inefficiencies, or interference, except as provided in this Agreement.
  - F. None of the provisions of this section shall exclude City's right of recovery for damages caused by delays or inefficiencies caused by any act or failure to act by Contractor, to include costs incurred by City for the procurement of additional professional services.
7. **FORCE MAJEURE.** Neither party shall be liable for delay, damage, or failure in the performance of any obligation under this Agreement if such delay, damage, or failure is due to causes beyond its reasonable control, including without limitation: fire, flood, strikes and labor disputes, acts of war, acts of nature, terrorism, civil unrest, acts or delays in acting of the government of the United States or the several states, judicial orders, decrees or restrictions, or any other like reason which is beyond the control of the respective party ("Force Majeure"). The party affected by any event of force majeure shall use reasonable efforts to remedy, remove, or mitigate such event and the effects thereof with all reasonable dispatch.
- A. The party affected by force majeure shall provide the other party with full particulars thereof including, but not limited to, the nature, details, and expected duration thereof as soon as it becomes aware.
  - B. When force majeure circumstances arise, the parties shall negotiate in good faith any modifications of the terms of this Agreement that may be necessary or appropriate in order to arrive at an equitable solution. Contractor performance shall be extended for a number of days equal to the duration of the force majeure. Contractor shall be entitled

to an extension of time only and, in no event, shall Contractor be entitled to any increased costs, additional compensation, or damages of any type resulting from such force majeure delays.

8. **INSPECTION AND ACCEPTANCE OF THE WORK.** Contractor shall report its progress to the City Project Manager as set forth herein. All services, work, and materials provided by Contractor under this Agreement shall be provided to the satisfaction and approval of the Project Manager.
  - A. The Project Manager shall decide all questions regarding the quality, acceptability, and/or fitness of materials furnished, or workmanship performed, the rate of progress of the work, the interpretation of the plans and specifications, and the acceptable fulfillment of the Agreement, in his or her sole discretion, based upon both the requirements set forth by City and the information provided by Contractor in its Proposal. The authority vested in the Project Manager pursuant to this paragraph shall be confined to the direction or specification of what is to be performed under this Agreement and shall not extend to the actual execution of the work.
  - B. Neither the Project Manager's review of Contractor's work nor recommendations made by Project Manager pursuant to this Agreement will impose on Project Manager any responsibility to supervise, direct, or control Contractor's work in progress or for the means, methods, techniques, sequences, or procedures of construction or safety precautions or programs incident Contractor's furnishing and performing the work.
9. **TERMINATION AND DEFAULT.** Either party, upon determination that the other party has failed or refused to perform or is otherwise in breach of any obligation or provision under this Agreement or the Contract Documents, may give written notice of default to the defaulting party in the manner specified for the giving of notices herein. Termination of this Agreement by either party for any reason shall have no effect upon the rights or duties accruing to the parties prior to termination.
  - A. **Termination by City for Cause.** City shall have the right to terminate this Agreement immediately, in whole or in part, upon the failure of Contractor to carry out any obligation, term, or condition of this Agreement. City's election to terminate the Agreement for default shall be communicated by providing Contractor written notice of termination in the manner specified for the giving of notices herein. Any notice of termination given to Contractor by City shall be effective immediately, unless otherwise provided therein, upon the occurrence of any one or more of the following events:
    - (1) Contractor fails to timely and properly perform any of the services set forth in the specifications of the Agreement;
    - (2) Contractor provides material that does not meet the specifications of the Agreement;
    - (3) Contractor fails to complete the work required within the time stipulated in the Agreement; or

- (4) Contractor fails to make progress in the performance of the Agreement and/or gives City reason to believe that Contractor cannot or will not perform to the requirements of the Agreement.
  - B. **Contractor's Opportunity to Cure Default.** City may, in its sole discretion, provide Contractor with an opportunity to cure the violations set forth in City's notice of default to Contractor. Contractor shall commence to cure the violations immediately and shall diligently and continuously prosecute such cure to completion within a reasonable time as determined by City. If the violations are not corrected within the time determined to be reasonable by City or to the reasonable satisfaction of City, City may, without further notice, declare Contractor to be in breach of this Agreement and pursue all remedies available at law or equity, to include termination of this Agreement without further notice.
  - C. **City's Remedies Upon Contractor Default.** In the event that Contractor fails to cure any default under this Agreement within the time period specified in this section, City may pursue any remedies available at law or equity, including, without limitation, the following:
    - (1) City shall be entitled to terminate this Agreement without further notice.
    - (2) City shall be entitled to hire another contractor to complete the required work in accordance with the needs of City;
    - (3) City shall be entitled to recover from Contractor all damages, costs, and attorney's fees arising from Contractor's default prior to termination; and
    - (4) City shall be entitled to recovery from Contractor any actual excess costs by: (i) deduction from any unpaid balances owed to Contractor; or (ii) any other remedy as provided by law.
  - D. **Termination for Convenience.** City reserves the right to terminate this Agreement in whole or in part at any time for the convenience of City without penalty or recourse. The Project Manager shall provide written notice of the termination. Upon receipt of the notice, Contractor shall immediately discontinue all work as directed in the notice, notify all subcontractors of the effective date of the termination, and minimize all further costs to City including, but not limited to, the placing of any and all orders for materials, facilities, or supplies, in connection with its performance under this Agreement. Contractor shall be entitled to receive compensation solely for: (1) the actual cost of the work completed in conformity with this Agreement; and/or (2) such other costs incurred by Contractor as permitted under this Agreement and approved by City.
10. **LIQUIDATED DAMAGES FOR LATE COMPLETION.** The parties agree that it would be extremely difficult and impracticable under the presently known facts and anticipated circumstances to ascertain and fix the actual damages that City and its residents would incur should Contractor fail to achieve Substantial Completion and/or Final Completion and readiness for final payment by the dates specified for each under the terms of this Agreement. Accordingly, the parties agree that should Contractor fail to achieve Substantial Completion by the date specified, then Contractor shall pay City, as liquidated damages and

not as a penalty, the sum of **ONE HUNDRED AND NO/100 DOLLARS (\$100)** per day for each calendar day of unexcused delay in achieving Final Completion beyond the date specified for Final Completion.

- A. **No Waiver of Rights or Liabilities.** Permitting Contractor to continue and finish the work, or any part thereof, beyond the dates specified for Substantial Completion and/or Final Completion and readiness for final payment shall not operate as a waiver on the part of the City of any of its rights under this Agreement. Any liquidated damages assessed pursuant to this section shall not relieve Contractor from liability for any damages or costs of other contractors caused by a failure of Contractor to complete the work as agreed.
  - B. **Right to Withhold or Deduct Damages.** When liquidated damages are due and owing, City shall have the right to: (1) deduct the liquidated damages from any money in its hands or from any money otherwise due or to become due to Contractor; or to (2) initiate any applicable dispute resolution procedure for the recovery of liquidated damages within the times specified under this Agreement.
  - C. **Non-Cumulative.** The parties agree and understand that the amounts set forth under this section for liquidated damages are not cumulative with one another. The amount set forth as liquidated damages for Contractor's failure to achieve Substantial Completion shall be assessed upon default and continue until Substantial Completion is attained. The amount set forth as liquidated damages for Contractor's failure to achieve Final Completion and readiness for payment shall be assessed after Substantial Completion is attained and apply until Final Completion is attained.
  - D. **Additional Costs.** In addition to the liquidated damages set forth under this section, Contractor agrees to pay all costs and expenses incurred by City due to Contractor's delay in performance to include inspection fees, superintendence costs, and travel expenses.
  - E. **Injunctive Relief.** The parties acknowledge that monetary damages may not be a sufficient remedy for Contractor's failure to achieve Substantial Completion or Final Completion in accordance with the terms of this Agreement, and that City shall be entitled, in addition to all other rights or remedies in law and equity, to seek injunctive relief.
11. **WARRANTY.** Contractor warrants that all labor, materials, and equipment furnished under the agreement are new, of the type and quality required for the Project, and installed in a good and workmanlike manner in accordance with the Contract Documents.
- A. Contractor shall guarantee that the work shall be free from any defects in workmanship for a period of not less than **ONE (1) YEAR** from the date of Final Completion.
  - B. Contractor shall guarantee that the materials provided shall be free from any defects for the longer of: (1) **ONE (1) YEAR** from the date of Final Completion; or (2) the period of warranty provided by any supplier or manufacturer.
  - C. Contractor shall obtain for the benefit of City and Owner all standard warranties of subcontractors, suppliers, and manufacturers of all material, equipment, or supplies

manufactured, furnished, or installed. All written warranties for work, materials, or equipment supplied must be provided to the City Project Manager before final payment will be authorized.

12. **DELAYS AND DAMAGES.** The Contractor agrees to make no claim for extra or additional costs attributable to any delays, inefficiencies, or interference in the performance of this contract occasioned by any act or omission to act by the City except as provided in the Agreement. The Contractor also agrees that any such delay, inefficiency, or interference shall be compensated for solely by an extension of time to complete the performance of the work in accordance with the provision in the standard specification.
13. **PERFORMANCE EVALUATION.** At the end of the contract, City may evaluate Contractor's performance. Any such evaluation will become public record.
14. **NOTICE REGARDING FAILURE TO FULFILL AGREEMENT.** Any contractor who enters into an Agreement with the City of Ocala and fails to complete the contract term, for any reason, shall be subject to future bidding suspension for a period of **ONE (1)** year and bid debarment for a period of up to **THREE (3)** years for serious contract failures.
15. **CONTRACTOR REPRESENTATIONS.** Contractor expressly represents that:
  - A. Contractor has read and is fully familiar with all the terms and conditions of this Agreement, the Contract Documents, and other related data and acknowledges that they are sufficient in scope and detail to indicate and convey understanding of all terms and conditions of the work to be performed by Contractor under this Agreement.
  - B. Contractor has disclosed, in writing, all known conflicts, errors, inconsistencies, discrepancies, or omissions discovered by Contractor in the Contract Documents, and that the City's written resolution of same is acceptable to Contractor.
  - C. Contractor has had an opportunity to visit, has visited, or has had an opportunity to examine and ask questions regarding the sites upon which the work is to be performed and is satisfied with the site conditions that may affect cost, progress, and performance of the work, as observable or determinable by Contractor's own investigation.
  - D. Contractor is satisfied with the site conditions that may affect cost, progress, and performance of the work, as observable or determinable by Contractor's own investigation.
  - E. Contractor is familiar with all local, state, and Federal laws, regulations, and ordinances which may affect cost, progress, or its performance under this Agreement whatsoever.
  - F. **Public Entity Crimes.** Neither Contractor, its parent corporations, subsidiaries, members, shareholders, partners, officers, directors, or executives, nor any of its affiliates, contractors, suppliers, subcontractors, or consultants under this Agreement have been placed on the convicted vendor list following a conviction of a public entity crime. Contractor understands that a "public entity crime" as defined in section 287.133(1)(g), Florida Statutes, is "a violation of any state or federal law by a person with respect to and directly related to the transaction of business with any public entity or with an agency or political subdivision of any other state or with the United States..."

Contractor further understands that any person or affiliate who has been placed on the convicted vendor list following a conviction for a public entity crime: (1) may not submit a bid, proposal, or reply on a contract: (a) to provide any goods or services to a public entity; (b) for the construction or repair of a public building or public work; or (c) for leases of real property to a public entity; (2) may not be awarded or perform work as a contractor, supplier, subcontractor, or consultant under a contract with any public entity; and (3) may not transact business with any public entity in excess of the threshold amount provided in section 287.017, Florida Statutes, for CATEGORY TWO for a period of 36 months from the date of being placed on the convicted vendor list.

16. **OWNER'S RESPONSIBILITIES.** Except as otherwise specifically provided for in this Agreement, the following provisions are the responsibility of Owner:
- A. **Cooperation.** Owner shall cooperate with City and Contractor during the performance of the work. Owner hereby designates City as its agent to oversee and approve Contractor's work and to authorize payment to Contractor for approved invoices.
  - B. **Access.** Owner shall grant access to the property subject to this Agreement. Owner may continue to occupy the property subject to this Agreement during Contractor's performance of the work unless otherwise agreed to by City, Contractor, and Owner. City shall not be responsible for relocating Owner during the pendency of the work.
  - C. **Personal Property and Storage.** Owner agrees to remove any personal property within the project construction area so as to not interfere with the progress of the work. Owner shall ensure Contractor has easy access in and around the project construction area for the operation of equipment required for the performance of the work. Owner will allow for the necessary movement and replacement of rugs, furniture, and/or storage boxes as necessary for Contractor's performance of the work. Owner shall be responsible for procuring at Owner's sole expense any needed external storage. City shall not be liable for damage to Owner's personal property due to Owner's failure to remove said personal property pursuant to this section.
  - D. **Pets.** Owner shall secure any and all pets in a location which does not interfere with the performance of the work or the Contractor's ability to fulfill its requirements under this Agreement. All pets shall be the sole responsibility of the Owner at all times hereunder.
  - E. **Utilities.** Owner shall furnish and allow the use of electricity and water by Contractor at no additional cost to City or Contractor during Contractor's performance of the work.
  - F. **License to Photograph Property.** Owner expressly grants to City the right to photograph or film images of the property subject to this Agreement, including the exterior and interior of the home or other structure, for documentation, education, and publicity purposes provided that such use shall not be for commercial purposes.
  - G. **Color Coordination.** All colors for all materials shall be chosen by Owner at the time of execution of this Agreement from the pre-selected options provided by the Community Development Services Department. This section applies, but is not limited to, color

selection for roofing, windows, interior and exterior paint, cabinets, flooring, plumbing fixtures, doors, trim, and appliances.

H. **Homeowner's Insurance.** No insurance is provided by City under this contract to cover Owner. City recommends that Owner obtain a homeowner's insurance or other comparable policy that is sufficient and adequate to produce Owner's interests and/or liabilities.

I. **Lien on Property.**

(1) Owner agrees to occupy and remain in possession of the property subject to this Agreement for a period of not less than **FIVE (5) YEARS** from the date of execution of this Agreement.

(2) Owner shall execute a Deferred Mortgage Loan equal to the total cost of rehabilitation set forth in the mortgage documents which names the City of Ocala as the lien holder. In the event that the amount set forth on the original Deferred Mortgage Loan does not represent the final cost of the rehabilitation services performed under this Agreement; Owner agrees to execute an amendment to the Deferred Mortgage Loan to reflect the true total cost of rehabilitation upon City's request.

(3) Owner's failure to comply with the provisions set forth herein shall constitute an event of default which may result in the acceleration of the repayment of the mortgage loan balance by Owner.

17. **CONTRACTOR RESPONSIBILITIES.** Except as otherwise specifically provided for in this Agreement, the following provisions are the responsibility of Contractor:

A. Contractor shall competently and efficiently supervise, inspect, and direct all work to be performed under this Agreement, devoting such attention thereto and applying such skills and expertise as may be necessary to perform the work in accordance with the Contract Documents. Contractor shall be responsible to see that the finished work complies accurately with the contract and the intent thereof.

B. Contractor shall have a competent resident job superintendent at the project worksite. Contractor's superintendent shall be the Contractor's primary representative at the project worksite and shall have authority to act on behalf of Contractor. Any and all directives given to the superintendent shall be binding on Contractor.

C. Contractor shall be solely responsible for the means, methods, techniques, sequences, or procedures of construction and safety precautions or programs incident thereto.

D. Contractor shall comply with all local, state, and Federal laws, regulations, and ordinances which may affect cost, progress, or its performance under this Agreement, to include obtaining all permits, licenses, and other authorizations necessary for the prosecution of the work and be responsible for all costs associated with same.

- E. Contractor shall operate and cause all construction equipment and materials supplied for or intended to be utilized in the Project to be operated and stored in only those areas prescribed by City. This includes the operations of workmen.
  - F. Contractor shall be fully responsible for receipt, inspection, acceptance, handling, and storage of all construction equipment and materials supplied for or intended to be utilized in the Project, whether furnished by Contractor or City. Contractor shall be responsible for providing adequate safeguards to prevent loss, theft, damage, or commingling with other materials or projects.
  - G. Contractor shall be fully responsible for all acts and omissions of its subcontractors, employees, and other persons or organizations directly or indirectly employed by them.
  - H. Contractor shall utilize competent employees during the performance of the work. At the request of City, Contractor shall replace any incompetent, unfaithful, abusive, and/or disorderly person under Contractor's employ. City and Contractor shall each promptly notify the other of any complaints received. Smoking is prohibited at the Project worksite and Contractor shall ensure that its employees, subcontractors, and employees of its subcontractors abide by City's smoking regulations.
  - I. All Contractor and subcontractor vehicles shall have their company names located on the sides and all personnel shall be required to wear company attire. Contractor shall coordinate services with the City's Project Manager.
  - J. Contractor understands the use and/or possession of alcohol or drugs on a work site is strictly prohibited. This is defined as either coming to the work site under the influence of alcohol/drugs or the use of alcohol/drugs on the work site. Contractor shall inform its subcontractors and employees of this policy. This policy shall be enforced at all times, including lunch, and before and after working hours on the site. Violation of this policy by Contractor, its employees, or its subcontractors shall be grounds for immediate termination of this Agreement by City and/or Owner.
  - K. Normal working hours shall be from 8:00 a.m. to 5:00 p.m., Monday through Friday. Saturday work must be approved, in writing, at least **FORTY-EIGHT (48)** hours in advance.
  - L. Contractor shall not display any signs, posters, or other advertising matter in or on any part of work or around the site thereof without the specific approval in writing by City.
  - M. Contractor shall promptly secure all necessary permits, inspections and approvals required and allow all inspections of all work by authorized personnel.
  - N. Contractor shall continue its performance under this Agreement during the pendency of any dispute or disagreement arising out of or relating to this Agreement, except as Contractor and City may otherwise agree in writing.
  - O. Contractor shall be responsible for the inspector's overtime.
18. **RESPONSIBILITIES OF CITY.** Except as otherwise specifically provided for in this Agreement, the following provisions are the responsibility of Contractor:

- A. City shall serve as agent for Owner and administer this Agreement for Owner as it is necessary to ensure the satisfactory performance of this Agreement.
  - B. City shall pay Contractor on behalf of Owner for the timely and satisfactory performance of the Work required under this Agreement.
  - C. City will require and enforce Contractor compliance with the terms, conditions, and procedures set forth in this Agreement.
  - D. City shall issue all communications to Contractor. City has the authority to request changes in the work in accordance with the terms of this Agreement and with the terms in **Exhibit A – Scope of Work**. City has the authority to stop work or to suspend any work for any reason.
19. **NO EXCLUSIVITY.** It is expressly understood and agreed by the parties that this is not an exclusive agreement. Nothing in this Agreement shall be construed as creating any exclusive arrangement with Contractor or as prohibit City from either acquiring similar, equal, or like goods and/or services or from executing additional contracts with other entities or sources.
20. **RIGHT OF ACCESS AND OTHER WORK PERFORMED BY THIRD PARTIES.** City may perform additional work related to the Project itself, or have additional work performed by utility service companies, or let other direct contracts therefore which shall contain General Conditions similar to these. Contractor shall afford the utility service companies and the other contractors who are parties to such direct contracts (or City if City is performing the additional work with City's employees) reasonable opportunity for the introduction and storage of materials and equipment and the execution of work and shall properly connect and coordinate his work with theirs.
- A. If any part of Contractor's work depends for proper execution or results upon the work of any such other contractor or utility service company (or City), Contractor shall inspect and promptly report to City in writing any latent or apparent defects or deficiencies in such work that render it unsuitable for such proper execution and results. Contractor's failure to so report shall constitute an acceptance of the other work as fit and proper for integration with Contractor's work except for latent or non-apparent defects and deficiencies in the other work.
  - B. Contractor shall do all cutting, fitting, and patching of work that may be required to make the parts come together properly and integrate with such other work. Contractor shall not endanger any work of others by cutting, excavating, or otherwise altering their work, and will only cut or alter their work with the written consent of City.
21. **STORAGE OF MATERIALS/EQUIPMENT.** Contractor shall be fully responsible for receipt, inspection, acceptance, handling, and storage of equipment and materials (whether furnished by Contractor or City) to be utilized in the performance of or incorporated into the work.

**22. APPLICABLE FEDERAL PROVISIONS.**

- A. **Civil Rights Act of 1964.** Under Title VI of the Civil Rights Act of 1964, no person shall, on the grounds of race, color, or national origin, be excluded from participation in, be denied the benefits of, or be subjected to discrimination under any program or activity receiving Federal financial assistance.
  - B. **Equal Employment Opportunity.** Contractor shall comply with all provisions of Executive Order No. 11246 of September 24, 1965, and of the rules, regulations, and relevant orders of the Secretary of Labor.
  - C. **Copeland Anti-Kickback Act.** Contractor shall comply with the provisions with the Copeland "Anti-Kickback" Act (18 U.S.C. 874), as supplemented by Department of Labor regulations (29 CFR part 3, "Contractors and Subcontractors on Public Building or Public Work Financed in Whole or in Part by Loans or Grants from the United States").
  - D. **Compliance in the Provision of Training, Employment, and Business Opportunities.** The work to be performed under this Agreement is on a project assisted under a program providing direct Federal financial assistance from the Department of Housing and Urban Development (the "Department") and is subject to the requirements of Section 3 of the Housing and Urban Development Act of 1968, as amended, 12 U.S.C. 1701. The parties to this Agreement shall comply with the provisions of Section 3 and the regulations issued pursuant thereto by the Secretary of Housing and Urban Development set forth in 24 CFR 134, and all applicable rules and orders of the Department issued thereunder prior to the execution of this Agreement. The parties certify and agree that they are under no contractual or other disability which would prevent them from complying with these requirements.
23. **COMMERCIAL AUTO LIABILITY INSURANCE.** Contractor shall procure, maintain, and keep in full force, effect, and good standing for the life of this Agreement a policy of commercial auto liability insurance with a minimum combined single limit of One Million Dollars (\$1,000,000) per occurrence for bodily injury and property damage arising out of Contractor's operations and covering all owned, hired, scheduled, and non-owned automobiles utilized in said operations. If Contractor does not own vehicles, Contractor shall maintain coverage for hired and non-owned automobile liability, which may be satisfied by way of endorsement to Contractor's Commercial General Liability policy or separate Commercial Automobile Liability policy.
24. **COMMERCIAL GENERAL LIABILITY INSURANCE.** Contractor shall procure, maintain, and keep in full force, effect, and good standing for the life of this Agreement a policy of commercial general liability insurance with limits not less than:
- A. One Million Dollars (\$1,000,000) per occurrence and Two Million Dollars (\$2,000,000) aggregate (or project aggregate, if a construction project) for bodily injury, property damage, and personal and advertising injury; and
  - B. One Million Dollars (\$1,000,000) per occurrence and Two Million Dollars (\$2,000,000) aggregate (or project aggregate, if a construction project) for products and completed operations.

- C. Policy must include coverage for contractual liability and independent contractors.
  - D. The City, a Florida municipal corporation, and its officials, employees, and volunteers are to be covered as an additional insured with a CG 20 26 04 13 Additional Insured – Designated Person or Organization Endorsement or similar endorsement providing equal or broader Additional Insured Coverage with respect to liabilities arising out of activities performed by or on behalf of Contractor. This coverage shall contain no special limitation on the scope of protection to be afforded to the City, its officials, employees, and volunteers.
25. **WORKERS' COMPENSATION AND EMPLOYER'S LIABILITY.** Contractor shall procure, maintain, and keep in full force, effect, and good standing for the life of this Agreement adequate workers' compensation and employer's liability insurance covering all of its employees in at least such amounts as required by Chapter 440, Florida Statutes, and all other state and federal workers' compensation laws, including the U.S. Longshore Harbor Workers' Act and the Jones Act, if applicable. Contractor shall similarly require any and all of its subcontractors to afford such coverage for all of its employees as required by applicable law. Contractor shall waive and shall ensure that Contractor's insurance carrier waives, all subrogation rights against the City of Ocala and its officers, employees, and volunteers for all losses or damages. Contractor's policy shall be endorsed with WC 00 03 13 Waiver of our Right to Recover from Others or its equivalent. **Exceptions and exemptions to this Section may be allowed at the discretion of the City's Risk Manager on a case-by-case basis in accordance with Florida Statutes and shall be evidenced by a separate waiver.**
26. **MISCELLANEOUS INSURANCE PROVISIONS.**
- A. Contractor's insurance coverage shall be primary insurance for all applicable policies. The limits of coverage under each policy maintained by Contractor shall not be interpreted as limiting Contractor's liability or obligations under this Agreement. City does not in any way represent that these types or amounts of insurance are sufficient or adequate enough to protect Contractor's interests or liabilities or to protect Contractor from claims that may arise out of or result from the negligent acts, errors, or omissions of Contractor, any of its agents or subcontractors, or for anyone whose negligent act(s) Contractor may be liable.
  - B. No insurance shall be provided by the City for Contractor under this Agreement and Contractor shall be fully and solely responsible for any costs or expenses incurred as a result of a coverage deductible, co-insurance penalty, or self-insured retention to include any loss not covered because of the operation of such deductible, co-insurance penalty, self-insured retention, or coverage exclusion or limitation.
  - C. Certificates of Insurance. No work shall be commenced by Contractor under this Agreement until the required Certificate of Insurance and endorsements have been provided nor shall Contractor allow any subcontractor to commence work until all similarly required certificates and endorsements of the subcontractor have also been provided. Work shall not continue after expiration (or cancellation) of the Certificate of Insurance and work shall not resume until a new Certificate of Insurance has been

provided. **Contractor shall provide evidence of insurance in the form of a valid Certificate of Insurance (binders are unacceptable) prior to the start of work contemplated under this Agreement to: City of Ocala. Attention: Procurement & Contracting Department, Address: 110 SE Watula Avenue, Third Floor, Ocala Florida 34471, E-Mail: [vendors@ocalafl.org](mailto:vendors@ocalafl.org).** Contractor's Certificate of Insurance and required endorsements shall be issued by an agency authorized to do business in the State of Florida with an A.M. Best Rating of A or better. The Certificate of Insurance shall indicate whether coverage is being provided under a claims-made or occurrence form. If any coverage is provided on a claims-made form, the Certificate of Insurance must show a retroactive date, which shall be the effective date of the initial contract or prior.

- D. City as an Additional Insured. The City of Ocala shall be named as an Additional Insured and Certificate Holder on all liability policies identified in this Section with the exception of Workers' Compensation and Professional Liability policies.
  - E. Notice of Cancellation of Insurance. Contractor's Certificate of Insurance shall provide **THIRTY (30) DAY** notice of cancellation, **TEN (10) DAY** notice if cancellation is for non-payment of premium. In the event that Contractor's insurer is unable to accommodate the cancellation notice requirement, it shall be the responsibility of Contractor to provide the proper notice. Such notification shall be in writing by registered mail, return receipt requested, and addressed to the certificate holder. Additional copies may be sent to the City of Ocala at [vendors@ocalafl.org](mailto:vendors@ocalafl.org).
  - F. Failure to Maintain Coverage. The insurance policies and coverages set forth above are required and providing proof of and maintaining insurance of the types and with such terms and limits set forth above is a material obligation of Contractor. Contractor's failure to obtain or maintain in full force and effect any insurance coverage required under this Agreement shall constitute material breach of this Agreement.
  - G. Severability of Interests. Contractor shall arrange for its liability insurance to include, or be endorsed to include, a severability of interests/cross-liability provision so that the "City of Ocala" (where named as an additional insured) will be treated as if a separate policy were in existence, but without increasing the policy limits
27. **SAFETY/ENVIRONMENTAL.** Contractor shall be responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the Work. Contractor shall make an effort to detect hazardous conditions and shall take prompt action where necessary to avoid accident, injury or property damage. EPA, DEP, OSHA and all other applicable safety laws and ordinances shall be followed as well as American National Standards Institute Safety Standards. Contractor shall take all necessary precautions for the safety of, and shall provide the necessary protection to prevent damage, injury, or loss to:
- A. All employees on the work and other persons that may be affected thereby;
  - B. All work, materials, and equipment to be incorporated therein, whether in storage on or off the site; and

- C. Other property at the site or adjacent thereto, including trees, shrubs, lawns, walks, pavements, roadways, structures, and utilities not designated for removal, relocation, or replacement in the course of construction.

All, injury, or loss to any property caused, directly or indirectly, in whole or in part, by Contractor, any subcontractor, or anyone directly or indirectly employed by any of them, or anyone for whose acts any of them may be liable, shall be remedied by Contractor. Contractor's duties and responsibilities for the safety and protection of the work shall continue until such time as the work is completed and accepted by City.

- 28. **TRAFFIC CONTROL AND BARRICADES.** The Contractor shall mitigate impact on local traffic conditions to all extents possible. The Contractor is responsible for establishing and maintaining appropriate traffic control and barricades. The Contractor shall provide sufficient signing, flagging, and barricading to ensure the safety of vehicular and pedestrian traffic at all locations where work is being done under this Agreement.
  - A. In addition to the requirements set forth in bid, the Contractor shall maintain at all times a good and sufficient fence, railing or barrier around all exposed portions of said work in such a manner as to warn vehicular and pedestrian traffic of hazardous conditions.
  - B. Should Contractor fail to properly barricade his work or stored material sites in the manner outlined above, the City may have the necessary barricading done, and all cost incurred for said barricading shall be charged to the Contractor.
- 29. **WORK SITE AND CLEANUP.** Contractor shall confine construction equipment, stored materials, and the operations of workers to only those areas prescribed by City. Daily, during the progress of the work, Contractor shall keep the premises free from accumulations of waste materials, rubbish, and all other debris resulting from the work. At the completion of the work, Contractor shall remove all waste materials, rubbish, and debris from and about the premises, as well as all tools, appliances, construction equipment and machinery, and surplus materials, and shall leave the site clean and ready for occupancy by Owner. Contractor shall provide an inventory listing of all surplus materials in an area designated by City. Contractor shall restore to their original condition those portions of the site not designated or alteration by the Contract.
- 30. **NON-DISCRIMINATORY EMPLOYMENT PRACTICES.** During the performance of the contract, the Contractor shall not discriminate against any employee or applicant for employment because of race, color, religion, ancestry, national origin, sex, pregnancy, age, disability, sexual orientation, gender identity, marital or domestic partner status, familial status, or veteran status and shall take affirmative action to ensure that an employee or applicant is afforded equal employment opportunities without discrimination. Such action shall be taken with reference to, but not limited to: recruitment, employment, termination, rates of pay or other forms of compensation and selection for training or retraining, including apprenticeship and on-the-job training.
- 31. **SUBCONTRACTORS.** Nothing in this Agreement shall be construed to create, impose, or give rise to any duty owed by City or its representatives to any subcontractor of Contractor or any other persons or organizations having a direct contract with Contractor, nor shall it create any obligation on the part of City or its representatives to pay or seek payment of

any monies to any subcontractor of Contractor or any other persons or organizations having a direct contract with Contractor, except as may otherwise be required by law. City shall not be responsible for the acts or omissions of any Contractor, subcontractor, or of any of their agents or employees, nor shall it create any obligation on the part of City or its representatives to pay or to seek the payment of any monies to any subcontractor or other person or organization, except as may otherwise be required by law.

32. **EMERGENCIES.** In an emergency affecting the welfare and safety of life or property, Contractor, without special instruction or authorization from the City Project Manager, is hereby permitted, authorized, and directed to act at its own discretion to prevent threatened loss or injury. Except in the case of an emergency requiring immediate remedial work, any work performed after regular working hours, on Saturdays, Sundays, or legal holidays, shall be performed without additional expense to the City unless such work has been specifically requested and approved by the City Project Manager. Contractor shall be required to provide to the City Project Manager with the names, addresses and telephone numbers of those representatives who can be contacted at any time in case of emergency. Contractor's emergency representatives must be fully authorized and equipped to correct unsafe or excessively inconvenient conditions on short notice by City or public inspectors.
33. **INDEPENDENT CONTRACTOR STATUS.** Contractor acknowledges and agrees that under this Agreement, Contractor and any agent or employee of Contractor shall be deemed at all times to be an independent contractor and shall be wholly responsible for the manner in which it performs the services and work required under this Agreement. Neither Contractor nor its agents or employees shall represent or hold themselves out to be employees of City at any time. Neither Contractor nor its agents or employees shall have employee status with City. Nothing in this Agreement shall constitute or be construed to create any intent on the part of either party to create an agency relationship, partnership, employer-employee relationship, joint venture relationship, or any other relationship which would allow City to exercise control or discretion over the manner or methods employed by Contractor in its performance of its obligations under this Agreement.
34. **ACCESS TO FACILITIES.** City shall provide Contractor with access to all City facilities as is reasonably necessary for Contractor to perform its obligations under this Agreement.
35. **ASSIGNMENT.** Neither party may assign its rights or obligations under this Agreement to any third party without the prior express approval of the other party, which shall not be unreasonably withheld.
36. **RIGHT OF CITY TO TAKE OVER CONTRACT.** Should the work to be performed by Contractor under this Agreement be abandoned, or should Contractor become insolvent, or if Contractor shall assign or sublet the work to be performed hereunder without the written consent of City, the City Project Manager shall have the power and right to hire and acquire additional men and equipment, supply additional material, and perform such work as deemed necessary for the completion of this Agreement. Under these circumstances, all expenses and costs actually incurred by City to accomplish such completion shall be credited to City along with amounts attributable to any other elements of damage and

certified by the Project Manager. The City Project Manager's certification as to the amount of such liability shall be final and conclusive.

37. **PUBLIC RECORDS.** The Contractor shall comply with all applicable provisions of the Florida Public Records Act, Chapter 119, Florida Statutes. Specifically, the Contractor shall:
- A. Keep and maintain public records required by the public agency to perform the service.
  - B. Upon request from the public agency's custodian of public records, provide the public agency with a copy of the requested records or allow the records to be inspected or copied within a reasonable time at a cost that does not exceed the cost provided in Chapter 119, Florida Statutes, or as otherwise provided by law.
  - C. Ensure that public records that are exempt or confidential and exempt from public records disclosure requirements are not disclosed except as authorized by law for the duration of the contract term and following completion of the contract if the Contractor does not transfer the records to the public agency.
  - D. Upon completion of the contract, transfer, at no cost, to the public agency all public records in possession of the Contractor or keep and maintain public records required by the public agency to perform the service. If the Contractor transfers all public records to the public agency upon completion of the contract, the Contractor shall destroy any duplicate public records that are exempt or confidential and exempt from public records disclosure requirements. If the Contractor keeps and maintains public records upon completion of the contract, the Contractor shall meet all applicable requirements for retaining public records. All records stored electronically must be provided to the public agency, upon request from the public agency's custodian of public records, in a format that is compatible with the information technology systems of the public agency.

**IF THE CONTRACTOR HAS QUESTIONS REGARDING THE APPLICATION OF CHAPTER 119, FLORIDA STATUTES, TO THE CONTRACTOR'S DUTY TO PROVIDE PUBLIC RECORDS RELATING TO THIS CONTRACT, CONTACT THE CUSTODIAN OF PUBLIC RECORDS AT: CITY OF OCALA, OFFICE OF THE CITY CLERK; 352-629-8266; E-mail: [clerk@ocalafl.gov](mailto:clerk@ocalafl.gov); City Hall, 110 SE Watula Avenue, Ocala, FL 34471.**

38. **AUDIT.** Contractor shall comply and cooperate immediately with any inspections, reviews, investigations, or audits relating to this Agreement as deemed necessary by the Florida Office of the Inspector General, the City's Internal or External auditors or by any other Florida official with proper authority.
39. **PUBLICITY.** Contractor shall not use City's name, logo, seal or other likeness in any press release, marketing materials, or other public announcement without City's prior written approval.
40. **E-VERIFY.** Pursuant to section 448.095, Contractor shall register with and use the U.S. Department of Homeland Security's ("DHS") E-Verify System, accessible at [https://e-](https://e-verify.dhs.gov)

[verify.uscis.gov/emp](https://verify.uscis.gov/emp), to verify the work authorization status of all newly hired employees. Contractor shall obtain affidavits from any and all subcontractors in accordance with paragraph 2(b) of section 448.095, Florida Statutes, and maintain copies of such affidavits for the duration of this Agreement. By entering into this Agreement, Contractor certifies and ensures that it utilizes and will continue to utilize the DHS E-Verify System for the duration of this Agreement and any subsequent renewals of same. Contractor understands that failure to comply with the requirements of this section shall result in the termination of this Agreement and Contractor may lose the ability to be awarded a public contract for a minimum of one (1) year after the date on which the Agreement was terminated. Contractor shall provide a copy of its DHS Memorandum of Understanding upon City's request. Please visit [www.e-verify.gov](https://www.e-verify.gov) for more information regarding the E-Verify System.

41. **CONFLICT OF INTEREST.** Contractor is required to have disclosed, with the submission of their bid, the name of any officer, director, or agent who may be employed by the City. Contractor shall further disclose the name of any City employee who owns, directly or indirectly, any interest in Contractor's business or any affiliated business entity. Any additional conflicts of interest that may occur during the contract term must be disclosed to the City of Ocala Procurement Department.
42. **WAIVER.** The failure or delay of any party at any time to require performance by another party of any provision of this Agreement, even if known, shall not affect the right of such party to require performance of that provision or to exercise any right, power, or remedy hereunder. Any waiver by any party of any breach of any provision of this Agreement should not be construed as a waiver of any continuing or succeeding breach of such provision, a waiver of the provision itself, or a waiver of any right, power, or remedy under this Agreement. No notice to or demand on any party in any circumstance shall, of itself, entitle such party to any other or further notice or demand in similar or other circumstances.
43. **SEVERABILITY OF ILLEGAL PROVISIONS.** Wherever possible, each provision of this Agreement shall be interpreted in such a manner as to be effective and valid under the applicable law. Should any portion of this Agreement be declared invalid for any reason, such declaration shall have no effect upon the remaining portions of this Agreement.
44. **INDEMNITY.** Contractor and Owner shall indemnify City and its elected officials, employees and volunteers against, and hold City and its elected officials, employees and volunteers harmless from, all damages, claims, losses, costs, and expenses, including reasonable attorneys' fees, which City or its elected officials, employees or volunteers may sustain, or which may be asserted against City or its elected officials, employees or volunteers, arising out of the activities contemplated by this Agreement including, without limitation, harm or personal injury to third persons during the term of this Agreement to the extent attributable to the actions of Contractor, Owner, their agents, and their employees.
45. **NO WAIVER OF SOVEREIGN IMMUNITY.** Nothing herein is intended to waive sovereign immunity by the City to which sovereign immunity may be applicable, or of any rights or limits of liability existing under Florida Statute § 768.28. This term shall survive the termination of all performance or obligations under this Agreement and shall be fully



RELATIONSHIP CREATED HEREBY, WHETHER SOUNDING IN CONTRACT, TORT, STRICT LIABILITY, OR OTHERWISE, TRIAL SHALL BE TO A COURT OF COMPETENT JURISDICTION AND NOT TO A JURY. EACH PARTY HEREBY IRREVOCABLY WAIVES ANY RIGHT IT MAY HAVE TO A TRIAL BY JURY. NEITHER PARTY HAS MADE OR RELIED UPON ANY ORAL REPRESENTATIONS TO OR BY ANY OTHER PARTY REGARDING THE ENFORCEABILITY OF THIS PROVISION. EACH PARTY HAS READ AND UNDERSTANDS THE EFFECT OF THIS JURY WAIVER PROVISION.

49. **GOVERNING LAW.** This Agreement is and shall be deemed to be a contract entered and made pursuant to the laws of the State of Florida and shall in all respects be governed, construed, applied, and enforced in accordance with the laws of the State of Florida.
50. **JURISDICTION AND VENUE.** The parties acknowledge that a majority of the negotiations, anticipated performance and execution of this Agreement occurred or shall occur in Marion County, Florida. Any civil action or legal proceeding arising out of or relating to this Agreement shall be brought only in the courts of record of the State of Florida in Marion County or the United States District Court, Middle District of Florida, Ocala Division. Each party consents to the exclusive jurisdiction of such court in any such civil action or legal proceeding and waives any objection to the laying of venue of any such civil action or legal proceeding in such court and/or the right to bring an action or proceeding in any other court. Service of any court paper may be effected on such party by mail, as provided in this Agreement, or in such other manner as may be provided under applicable laws, rules of procedures or local rules.
51. **REFERENCE TO PARTIES.** Each reference herein to the parties shall be deemed to include their successors, assigns, heirs, administrators, and legal representatives, all of whom shall be bound by the provisions hereof.
52. **MUTUALITY OF NEGOTIATION.** Contractor and City acknowledge that this Agreement is a result of negotiations between Contractor and City, and the Agreement shall not be construed in favor of, or against, either party because of that party having been more involved in the drafting of the Agreement.
53. **SECTION HEADINGS.** The section headings herein are included for convenience only and shall not be deemed to be a part of this Agreement.
54. **RIGHTS OF THIRD PARTIES.** Nothing in this Agreement, whether express or implied, is intended to confer any rights or remedies under or because of this Agreement on any persons other than the parties hereto and their respective legal representatives, successors and permitted assigns. Nothing in this Agreement is intended to relieve or discharge the obligation or liability of any third persons to any party to this Agreement, nor shall any provision give any third persons any right of subrogation or action over or against any party to this Agreement.
55. **AMENDMENT.** No amendment to this Agreement shall be effective except those agreed to in writing and signed by both parties to this Agreement.

56. **COUNTERPARTS.** This Agreement may be executed in counterparts, each of which shall be an original and all of which shall constitute the same instrument.
57. **ELECTRONIC SIGNATURE(S).** Contractor, if and by offering an electronic signature in any form whatsoever, will accept and agree to be bound by said electronic signature to all terms and conditions of this Agreement. Further, a duplicate or copy of the Agreement that contains a duplicated or non-original signature will be treated the same as an original, signed copy of this original Agreement for all purposes.
58. **ENTIRE AGREEMENT.** This Agreement, including exhibits, (if any) constitutes the entire Agreement between the parties hereto with respect to the subject matter hereof. There are no other representations, warranties, promises, agreements, or understandings, oral, written, or implied, among the Parties, except to the extent reference is made thereto in this Agreement. No course of prior dealings between the parties and no usage of trade shall be relevant or admissible to supplement, explain, or vary any of the terms of this Agreement. No representations, understandings, or agreements have been made or relied upon in the making of this Agreement other than those specifically set forth herein.
59. **LEGAL AUTHORITY.** Each person signing this Agreement on behalf of either party individually warrants that he or she has full legal power to execute this Agreement on behalf of the party for whom he or she is signing, and to bind and obligate such party with respect to all provisions contained in this Agreement.

**[REMAINDER OF PAGE INTENTIONALLY LEFT BLANK. SIGNATURE PAGE TO FOLLOW.]**



**IN WITNESS WHEREOF**, the parties have executed this Agreement on the dates set forth below.

**ATTEST:**

**CITY OF OCALA**

\_\_\_\_\_  
Angel B. Jacobs City  
Clerk

\_\_\_\_\_  
Barry Mansfield  
City Council President

Date: \_\_\_\_\_

**Reviewed and Approved by Community  
Development Services Department:**

**BRUCE WAYNE WILEY, LLC**

\_\_\_\_\_  
James Haynes, Director  
Community Development Services

\_\_\_\_\_  
(Authorized Signatory)

**Approved as to form and legality:**

By: \_\_\_\_\_  
(Printed Name of Signatory)

\_\_\_\_\_

Title: \_\_\_\_\_  
(Title of Authorized Signatory)

By: \_\_\_\_\_

Date: \_\_\_\_\_

Title: \_\_\_\_\_



**Witnesses for Property/Homeowner  
Signature:**

\_\_\_\_\_  
(Signature of First Witness)

\_\_\_\_\_  
(Printed Name of First Witness)

\_\_\_\_\_  
(Signature of Second Witness)

\_\_\_\_\_  
(Printed Name of Second Witness)

**PROPERTY/HOMEOWNER**

\_\_\_\_\_  
(Signature of Property/Homeowner)

\_\_\_\_\_  
(Printed Name of Homeowner)

Date: \_\_\_\_\_

**BACKGROUND**

1. Contractor shall perform rehabilitation work on a residential home located at **1114 NW 13<sup>th</sup> Avenue Ocala, FL, 34475**.
2. Contractor shall provide all labor, materials, and equipment necessary to perform the services under the rehabilitation specifications, guidelines, and the Florida Building Code.

**PERMIT AND SPECIFICATION REQUIREMENTS**

1. **Permits Required:** Contractor will be responsible for obtaining the following City of Ocala permits at no additional cost to the City:
  - Building
  - Plumbing
  - Electrical
  - Roofing
  - Mechanical
2. No work shall commence, nor will any permits be issued, until all associated contracts have been approved and signed by all applicable parties involved.
3. **Estimated Permit Cost/Allowance:** \$200.00
4. **Permit Fee Schedule:** For information regarding permitting fees, please visit the following link: <https://www.ocalafl.org/home/showpublisheddocument/490/637545367420930000>
5. **Specifications:** All work shall comply with the rehabilitation specifications and guidelines outlined in the Florida Building Code: <https://floridabuilding.org/c/default.aspx>
6. **Work Summaries and Reports:**
  - A. Exhibit A – Scope of Work
  - B. Exhibit B – Price Proposal
  - C. Exhibit C – Work Write Up
  - D. Exhibit D - Asbestos Survey Report

**ANTICIPATED TASKS AND HOURS**

1. **Anticipated Tasks:** The Contractor will be required to perform the services in **Exhibit C - Work Write-Up** for the City of Ocala. This list is not an attempt to exclusively define those specific activities the Contractor will perform.
2. **Working Hours:** This project's normal/standard working hours are 8:00 AM – 5:00 PM Monday through Friday, excluding holidays. No work will be permitted on City observed holidays. Saturday work must be approved, in writing, at least forty-eight (48) hours in advance.
3. Contractor will be responsible for the inspector's overtime.
4. **Weather Days:** The Contractor shall submit a written request to the City Project Manager (email is the preferred method) for additional days for which work is suspended or delayed by weather. Weather days shall be reconciled with each monthly pay application for the period in which the application is submitted and shall be final. Contractor performance and execution of work will be considered in the determination for granting additional days.

**PROJECT SUMMARY**

1. This work includes but is not limited to the following:
  - Roof
  - HVAC
  - Water Heater
  - Attic Insulation
  - Windows
  - Exterior Paint
  - Interior Paint
  - Hall Bath Remodel
  - Master Bath
  - Half Bath
  - Interior Repairs
  - Kitchen Cabinets
  - Electrical
  - Exterior Repairs
  - Exterior Doors
  - Flooring
2. Work shall be coordinated with the City Rehabilitation Specialist, Chris Lewis, 629-8333 or 425-7686, [clewis@ocalafl.gov](mailto:clewis@ocalafl.gov).

**CONTRACTOR RESPONSIBILITIES**

1. Contractor shall complete all work performed under this contract following policies and procedures of the City of Ocala and all applicable State of Florida and federal laws, policies, procedures, codes, and guidelines.
2. Contractor is responsible for purchasing the permits and ensuring that the hired sub-contractors purchase their required permits.
3. Each rehabilitation job shall have the required permits (i.e.: building permit, plumbing permit, electrical permit, and H.A.R.V. permit).
  - A. Contractor is responsible for purchasing the permits and ensuring that his/her sub-contractors purchase their required permits.
  - B. All electrical, plumbing, mechanical, and structural inspections must be made by the City of Ocala Growth Management Department.
    - i. Contractor is required to notify the Growth Management Department, (352) 629-8421 for each of the required inspections.
    - ii. When calling for an inspection, Contractor will need the address, owner's name, Contractor (on plumbing and electrical inspections, the plumber or electrician is the contractor), and the permit number.

- iii. The Rehabilitation Specialist shall sign each request for payment form as approved.
  - iv. When an inspection is called into the Growth Management Department before 9:00 AM the inspections will be made by noon. All inspections called before 2:00 PM will be made by 5:00 PM.
  - v. The City of Ocala Growth Management Department makes "same day" inspections.
4. Contractor must have sufficient equipment to complete the work. City will not pay for rental of additional equipment, purchases of equipment, etc.
  5. Construction shall comply with all requirements and instructions of applicable manufacturers.
  6. Work shall be completed immediately.
  7. Contractor is advised to leave a property by the property owner or their representative, Contractor shall leave at once without altercation. Contractor shall then contact the City Project Manager within 24 hours and advise of the reason for not completing the assigned project.
  8. Contractor is responsible for all wages, taxes, and worker's compensation of all employees.
  9. Contractor is responsible for any damages including but not limited to buildings, curbing, pavement, landscaping, or irrigation systems caused by their activity. Should any public or private property be damaged or destroyed, the Contractor, at their expense, shall repair or make restoration as acceptable to the City of destroyed or damaged property no later than one (1) month from the date damage occurred.

#### CONSTRUCTION WORK AREAS, SITE HOUSEKEEPING AND CLEANUP

1. Provide on-site sanitary facilities as required by governing agencies.
2. **Waste/Debris:** Contractor shall always keep the premises free from the accumulation of waste materials and rubbish caused by operations and employees. Contractor will provide approved containers for collection and disposal of waste materials, debris, and rubbish. Contractor shall legally dispose of debris. At least once weekly dispose of such waste materials, debris, and rubbish off-site.
3. Contractor shall supply appropriately sized construction skip for demolition/construction debris.
4. **Cleanup:** Periodic cleanup to avoid hazards or interference with operations at the site, and to leave the site in a reasonably neat condition. The work site will be completely cleaned after each day of work.
5. **Final Cleaning:** Upon completion of work, clean the entire work area/project site as applicable.
  - A. Leave the work and adjacent areas affected in a clean condition satisfactory to the City Project Manager.
  - B. Contractor shall clean and remove from the premises, all surplus and discarded materials, rubbish, and temporary structures, and shall restore acceptably all property, both public and private, which has been damaged during the prosecution of the work and shall have the work in a neat and presentable condition. *Note: Any debris shall be removed from the premises. New construction debris, trash, etc., shall not be left or buried on site.*
  - C. Contractor shall broom clean exterior paved driveways and hose clean sidewalks and concrete exposed surfaces if impacted by work or included in the work area.
  - D. All furnishings and equipment shall be placed back in their original locations.

**CONTRACTOR EMPLOYEES AND EQUIPMENT**

1. Contractor must utilize competent employees in performing the work. Employees performing the work must be properly licensed or qualified as required by the scope.
2. Contractor must provide a valid telephone number, email, and address to the City Project Manager. The phone must be answered during normal working hours, or voicemail must be available to take a message.
3. At the request of the City, Contractor must replace any incompetent, unfaithful, abusive, or disorderly person in their employment. City and Contractor must each be promptly notified by the other of any complaints received.
4. The employees of the Contractor must wear suitable work clothes and personal protective equipment as defined by OSHA (hard hats, bucket harnesses, etc.) and meeting Manual on Uniform Traffic Control Devices (MUTCD) and National Electrical Safety Code (NESC) requirements as indicated for all work conducted and be as clean and in as good appearance as the job conditions permit.
5. Contractor will operate as an independent contractor and not as an agent, representative, partner, or employee of the City of Ocala, and shall control their operations at the work site, and be solely responsible for the acts or omissions of their employees.
6. No smoking is allowed on City property or projects.
7. Contractor, employees, and sub-contractors will be courteous to the public at all times while at the work site.
8. Contractor shall possess and maintain sufficient equipment to complete the work described herein. Contractor's equipment shall be in good repair, and contractor shall have a qualified operator to maintain the care of the equipment. All operators must be trained in proper use and care of equipment. A list of equipment shall be provided to the City upon request.
9. All company trucks must display a visible logo on the outside.
10. All employees must have a shirt with the company logo and/or a badge with a picture ID, company name and employee name to be always worn.

**SUB-CONTRACTORS**

1. Contractor shall not assign, sublet, or transfer any of the rights and/or duties under the terms of this agreement without written approval of the City.
2. Contractor must perform a minimum of **30%** of the work with their forces.

**SAFETY**

1. Contractor is solely responsible for ensuring safety during demolition and construction and for conformance to all applicable OSHA standards; and local, state, and national codes concerning safety provisions for their employees, sub-contractors, all building and site occupants, staff, public, and all persons in or around the work area.
2. Job site visits by City staff do not constitute approval, awareness, or liability for any hazardous condition.
3. Contractor shall be responsible for securing their equipment, materials, clothing, and other property.

4. Contractor will be responsible for storage and adequate protection of all materials and equipment before completion.
5. Contractor shall exercise every necessary precaution for the safety of the property and the protection of any persons and/or property located adjacent to or making passage through said property. All claims and repairs are to be made by the Contractor promptly (48 hours).
6. In no event shall the City be responsible for any damages to any of the Contractor's equipment, materials, property, or clothing lost, damaged, destroyed, or stolen.



## Exhibit B - PRICE PROPOSAL

CONTRACT# CDS/240558

### CONTRACTOR NAME

**Bruce Wayne Wiley, LLC**

### LOCATION

**Fernandina Beach, FL**

ITEM	DESCRIPTION	UOM	EST QTY	COST
1	Roof	LS	1	\$ 19,488.00
2	HVAC	LS	1	\$ 16,121.00
3	Water Heater	LS	1	\$ 2,443.00
4	Attic Insulation	LS	1	\$ 3,424.00
5	Windows	LS	1	\$ 17,334.00
6	Exterior Paint	LS	1	\$ 6,848.00
7	Interior Paint	LS	1	\$ 5,171.00
8	Hall Bath Remodel	LS	1	\$ 14,384.00
9	Master Bath	LS	1	\$ 14,871.00
10	Half Bath	LS	1	\$ 3,824.00
11	Interior Repairs	LS	1	\$ 14,927.00
12	Kitchen Cabinets	LS	1	\$ 12,820.00
13	Electrical	LS	1	\$ 14,344.00
14	Exterior Repair	LS	1	\$ 4,121.00
15	Exterior Door	LS	1	\$ 4,307.00
16	Flooring	LS	1	\$ 12,427.00
17	Permit Allowance	LS	1	\$ 1,288.00

### Rehabilitation Specification: GRNT 23-001

**Applicant:** WILLIAMS, DARRELL  
**Address:** 1114 NW 13TH AVE  
**Parcel #:** 2551-005-002  
**Phone:** 352-230-7000



Work must comply with the current **Florida Building Code.**

#### TYPES OF PERMITS REQUIRED:

Building  Roofing  Plumbing  Electrical  Mechanical  Gas

#### CONTRACTORS REQUIRED:

General/Builder/Residential  Roofing  Plumbing  Electrical  HVAC  Gas  Specialty

**Project must be fully completed in 90 days.**

#### GENERAL CONDITIONS

1. It is the responsibility of the Contractor and/or sub-contractors to obtain all required permits necessary to perform the work described above and to properly post/display them clearly at the job site.
2. It is also the responsibility of the Contractor and sub-contractors to ensure all required inspections are requested and passed, up to and including the final inspections from the City of Ocala Building Department and the Community Development Services Department.
3. Due to this being an owner-occupied residence, the Contractor MUST coordinate with the Owner and City of Ocala Building Department/Inspectors when requesting the necessary inspections for this project. (Owner may move out during construction.)
4. All references to equivalent imply the substituted goods/materials must meet or exceed the specifications of the brand requested.

**Item 1- Roof**

1. This work **will** require a Re-Roof Permit.
2. Tear off all roof surfaces to deck sheathing and repair any/all damaged or rotted areas as required.
3. Remove and dispose of old skylights if installed.
4. Provide and install, if necessary, up to 800 sq. ft. of deck material (sheathing) and will provide a per foot cost of material and labor on any unforeseen sheathing damage over 800 sq. ft., determined as a change order.
5. Provide and install, if necessary, up to 300 lt. of fascia or rafter/truss and shall provide a per foot cost of material and labor on any unforeseen sheathing damage over 300 lt. of fascia or rafter/truss., determined as a change order.
6. Check all truss to bond beam/top plate connections, ensure that truss straps have minimum three (3) nails. Use #10D nail or SDS screw. Nail shall be bent over on the opposite side. Install Simpson H2.5 Galvanized Hurricane Tie to each truss top plate (where tie downs are missing or visually un-inspectable) with manufacturer's suggested fasteners. This must be inspected by the Rehabilitation Inspector before closure.
7. Ensure all roof sheathing/decking is re-nailed per code requirements and passes required inspections. Roof coverings shall be applied to solidly sheathed roofs (install dead wood as necessary) or spaced sheathing where code approves, except where the roof covering is specifically designed to be applied to spaced supports.
8. Inspect all structural roof components, rafter tails, fascia boards visible during re-roof. Contractor shall provide and install materials needed to "scab" or reinforce areas of rot or minor damage on roof framing members.
9. If major (requires an Engineer) structural damage is discovered, it must immediately be brought to the attention of the Rehabilitation Inspector to determine how to proceed.
10. Provide and install **ALL** new roof components, 2" aluminum drip-edge, concealed "shingle over" ridge vent (install maximum amount of ridge vent), electrical mast collar, lead boots for plumbing vent pipes and risers for vents, colored to match roof. (Include new range hood vent (8" or 10" w/ integrated damper) if vent currently exists, bathroom exhaust vents (2 at 4" – 6" each, w/ dampers) are mandatory, and new vents for gas water heater and furnace (if needed) (new boot and riser vent colors shall complement/match roof covering/house colors).
11. Provide and install completely new metal flashing around chimneys (where necessary) and fasten and seal in place fully. Chimneys shall be provided with crickets where the dimension parallel to the ridgeline is greater than 30 inches (762 mm) and does not intersect the ridgeline. Contractor shall confirm all areas are sealed and do not leak.
12. Provide and install new materials for any other vent penetration not listed above. Contractor shall ensure all new and existing ductwork is properly and securely connected to new roof vents.
13. Perform dry-in with a code approved, secondary water barrier over sloped roof.
14. Provide and install, code compliant, asphalt shingles, minimum 130 MPH wind rating and minimum 30-year warranty. Flat roofs use RUBEROID® torch system equal or better. Owner shall choose color

following contract signing, and Rehabilitation Specialist must approve (Lighter, Energy Star colors suggested). If code requires, install code compliant metal roofing.

15. Provide and install code approved “peel and stick” self-adhering membrane as a secondary water barrier over 100% of any shallow roof area and insure all required or needed flashing is completely/properly installed.
16. Remove and properly dispose of all debris and nails around home, and ensure no nails are left, especially in driving/parking/walking areas.
17. Provide homeowner and Rehabilitation Specialist with a written copy of roof warranty from Contractor and manufacturer, including the shingle color and brand name and model line of shingles and underlayment used, immediately following roof final inspection.
18. NOTE: It is the Contractor’s responsibility to schedule and successfully pass all required inspections.
19. Install new soffit/fascia and porch ceilings (aluminum/vinyl soffit and aluminum fascia, vinyl porch ceilings), and provide Owner color choices. Contractor shall remove frieze blocks if installed for proper airflow.
20. If installed, Contractor shall replace gutters/downspouts with new seamless 6” gutters w/gutter guards to original condition. Adjust for proper water flow. Include splash blocks, splash guards, etc. seal all joints to eliminate/reduce leaks. Owner shall be provided choice of colors.
21. Make level 4 legs (corners) of top of chimney and install full coverage, 24-gauge galvanized steel hood (chimney cap). Secure according to manufacturer’s instructions.

## Item 2 – HVAC

1. Remove and properly dispose of existing HVAC system, air handler, condenser unit, copper lines and condensate pipe and pump, etc.
2. Install drywall walls/ceiling in furnace closet. Line return air box with duct board.
3. Provide and install completely new, properly sized to home, electric heat pump style HVAC system, including **ALL** new copper lines and condensate pipes and condensate pump (if needed), pipe insulation and any other related components.
4. Install fresh air and return air as required by code.
5. Ensure that new condensate line empties a minimum of 12” away from the side walls of the home and is secured per code.
6. Provide and install new thermostat wires for **ALL** new equipment. If electrical supplies and disconnects are sized properly to handle new system, they may be re-used, otherwise it will be the Contractor’s responsibility to provide and install new electrical wiring and disconnects required for new HVAC equipment.
7. Provide and install **NEW** circuit breakers for air handler, heat strips and compressor where necessary.
8. New HVAC unit **MUST** be a minimum of 16 SEER/SEER2 and **MUST** be Energy Star Certified in Florida. Install emergency drain pan with float switch if needed (observed rust, mold, algae, etc.).
9. Replace all flex ducts and register boxes. All joint connections shall be sealed with mastic (fiber reinforced, water-based, high-velocity duct sealant).

10. Check clean and sanitize existing metal ductwork. All joint connections to be sealed with mastic (fiber reinforced, water-based, high-velocity duct sealant).
11. Provide and install a secondary “wet” switch as a safety backup to the gravity condensate.
12. If existing plenum base is damaged, rotted or in any way deteriorated, provide, and install **ALL** necessary materials to properly repair or rebuild the plenum with duct board or (if metal, then replace with metal).
13. Provide and install new standard filter box (if needed) and install new filter(s), minimum of MERV-5 Rating or better, in a readily accessible manner. Filter size shall be common and readily available at any chain retail store such as Walmart.
14. Provide and install a new digital, programable thermostat, matched/compatible to new system. Owner’s thermostat can be used if functional. Ensure that new thermostat (if used) is designed to utilize the maximum functionality of the new HVAC systems’ capabilities (temperature and humidity control and programming) and energy efficiency.
15. Install new properly sized registers and returns as needed, throughout home and make all necessary repairs to home in all locations a component is removed or replaced.
16. If required by code or for permit, obtain and provide energy calculations and manual D & J and AHRI reports.
17. Copies of all documents, including signed energy calculations, manual D & J and AHRI reports, warranty information and ALL paperwork required for any energy rebates that the Owner may be eligible for must be made and provided to Owner and Rehabilitation Inspector at final inspection.
18. Provide Owner with basic instruction of how to operate new HVAC system / thermostat, filter change schedule and instruction on suggested service intervals.
19. Contractor shall repair/paint any areas damaged due to replacement.

### Item 3 – Water heater

1. Drain, remove, and properly dispose of old water heater.
2. Remove and dispose of old cold-water valve and associated piping.
3. Provide and install all materials needed to properly reconstruct hot and cold-water supplies to and from the new water heater to all necessary connections (laundry, bathroom, kitchen, etc.)
4. Provide and install new ¼-turn, brass ball valve at hot and cold-water lines, per code. Provide all other pipes, fittings and materials needed to properly complete the installation of the new water heater to all hot and cold-water supplies to and from the new water heater to all necessary connections (laundry, bathroom, kitchen, etc.)
5. Provide and install new fifty (50) gallon, dual element 5500/5500-Watt, standard electric water heater, with minimum 9-year warranty, per code. Suggested model Rheem Model# XE50M09CG55U0, equal/better (Shall include thermal expansion tank, water heater blanket and insulation for hot/cold water lines).
6. Provide and install new pan and drain.
7. Secure water heater per code.

8. Contractor shall provide any electrical connections if required to water heater as/per code with properly sized circuit breaker, to ensure safe operation of water heater.
9. Ensure all equipment has been properly registered and that all warranty registrations, paperwork, or documents have been filled out and provided to the Owner. Provide copy of same information (not including full operator's manual(s)) to Owner at final.
10. Contractor shall follow best practices when working with asbestos and/or lead on rehabilitation projects

#### **Item 4 – Attic insulation**

1. Provide and install additional blown-in insulation into 100% of the attic cavity, to bring "R-value" to R-30 or higher.
2. Provide and install new depth gauges as required by code, that are visible from closest attic access point(s)
3. Provide new code compliant insulation in walls as need.
4. Provide and install new gasket seals around all attic access openings. If new openings are created to complete other work at the home, ensure those new access points are either closed in and replaced to "like-new" condition or that they are properly sealed with new gasket material and secured in place with new trim materials.
5. Provide Owner and Grants Specialist with copies of certificate(s) for Insulation installation and any other paperwork that might be required for Owner to obtain Ocala Electric Utility or other rebates for which they may qualify.

#### **Item 5 – Windows (12)**

- 1) Remove and properly dispose of all existing windows/SGD.
- 2) Provide new, Install and seal (Sashco – Big Stretch Elastomeric Caulk or Equal) new, ENERGY Star Certified (For Florida), vinyl or fiberglass, single-hung, colonial style, insulated, low-E, argon filled windows with screens in all window locations on the home, size-to-size match, except where the code requires something different (triple bay windows can be downsized to two windows instead of three).
- 3) Install new sliding glass door (follow window specs).
- 4) Ensure units are properly fastened and completely sealed around frames per code.
- 5) Window color shall be white.
- 6) Provide and install new trim to the interior and if necessary, to the exterior (stucco patch, rot-proof trim, etc.), around window openings, as needed, to Ensure a clean and complete, "like-new" (matching) finished appearance.
- 7) Ensure at least one window in each bedroom/sleeping area, will meet the requirements of the Current Building Code, Chapter 702, and related. NOTE: If an electrical outlet is in such a location as to be affected by this requirement, it is the responsibility of the contractor to make necessary accommodations to properly relocate the outlet per code.
- 8) Repair openings (interior and exterior), sills (sills should match existing) when damaged or if/when opening must be modified for egress. If sills are missing, then install marble sills. Opening shall be "like

new” upon completion (Egress requirements are the responsibility of the contractor)

- 9) Replace shutters if installed, sized for new windows as needed.

### Item 6 – Exterior paint

1. Carefully pressure wash/clean 100% of the exterior of the home, including, front entry way and sidewalk, walls, soffits, fascia, and gables, etc.
2. Remove all non-essential cable/phone wiring on the exterior. Consult Owner before removing. All useable cable/phone wiring shall be reinstalled using coaxial staples or better.
3. Caulk and fill or repair all cracks, gaps, holes, or other damage around perimeter of home with a paintable, water-based elastomeric, acrylic caulk before applying any primer or paint. Suggested “Big Stretch” High Performance, water-based sealant by Sashco or equal/better.
4. Prime all exterior doors, trim, front entry ceiling, etc. with Sherwin-Williams Multi-Purpose Interior/Exterior Latex Primer/Sealer, (or equal, per Data Sheet) unless product is not specified for use on a specific building material/surface.
5. Provide and apply at least one “full-coverage coat” of Sherwin Williams “PrimeRx Peel Bonding Primer” or “Loxon Conditioner (white)” or equal/better (provide Safety Data Sheets for any requested alternate – MUST be pre-approved by Rehabilitation Inspector) to all exterior CMU walls, gables, and other surfaces as appropriate.
6. Paint painted portion of front porch.
7. Paint all exterior surfaces using Sherwin-Williams “SuperPaint Exterior Acrylic Latex” (or equal/better per data sheet). Owner shall select wall color (1), trim color (1) and front entry door color (1), following contract signing, however, color selections MUST BE PRE-APPROVED by the Rehabilitation / Inspection Specialist before application of paint materials.
8. Replace house numbers with code approved numbers. **DO NOT USE STICK ONS.**  
At final inspection, provide a list of the manufacturer, type, sheen/finish, and color of all coatings used and the respective locations where they were applied, to the Owner and Rehabilitation Specialist.

### Item 7 –Interior painting

1. Provide and apply “Kilz” (equal or better) stain resistant primer to all walls/ceilings and new and/or unpainted drywall as needed throughout.
2. Paint entire interior of home.
3. Provide and apply two (2) or more (if necessary), full-coverage coats of Sherwin-Williams ProMar 200 Zero VOC Interior Latex, equal or better.
4. Ceilings shall be painted flat, walls/doors/trim to be painted semi-gloss/satin.

### Item 8 – Hall bath

1. Complete interior demolition of existing hall bathroom, down to studs and slab. Includes dining room side of bathroom.
2. Remove and dispose of all debris.

3. Repair or add sub-framing in walls if/as needed.
4. Make all necessary repairs and modifications to rough plumbing while walls are open and accessible, and schedule and pass required inspections. Test waste and supply lines for leaks.
5. Replace tub with new.
6. Provide and install solid wood backing to accommodate three (3) new ADA grab bars for shower: 36" to 42" on large back wall of shower area and a vertical 16" to 18" on each end of the shower enclosure (total of 3 bars to be installed in shower stall at Owner's direction)
7. Provide and install solid wood backing for installation of "hard mounted" shower curtain rod to be mounted at/or about 78" (Owner's direction) above finished floor to centerline.
8. Provide and install solid wood backing behind and beside toilet to accommodate two (2) new ADA grab bars, approximately 24' and 30-36".
9. Provide and install new insulation in ALL exterior open wall cavities, using batt, r-foil, or other insulation, as appropriate.
10. Provide and install, with approved fasteners, cement board backing on all walls and around window opening in shower/tub area. (tile backer or dura-rock, or equivalent)
11. Provide and install new moisture resistant gypsum-type wallboard on all other walls and ceilings, where needed, in bathroom and finish with smooth or very light texture
12. *Large (12x18 or larger) porcelain wall tile may be used (tile floor to ceiling), with all other accessories.*
13. Provide and install one large, recessed shampoo/soap niche (stainless is acceptable) where Owner chooses on shower wall.
14. Provide and install new Delta, single lever, "Classic" shower valve and trim.
15. Provide and install new Delta "ActivTouch" shower head/hand shower combo, *Model 51900 OR Equivalent with slide bar.*
16. Provide and install new ADA height, elongated white 2-piece toilet, WaterSense Certified, 1.28gpf, w/chrome flush lever and soft-close seat/lid. Toilet flange will need to be reset from the north wall.
17. Provide and install new ¼ -turn supply stop and supply line, new wax ring and new flange or stainless-steel flange repair ring (If broken or damaged) and nylon flange bolts (suggested). Ensure new toilet is level and secured properly and does not leak, use matching grout or caulk around base of new toilet at floor.
18. Provide and install new LED bathroom general lighting.
19. Install Broan Economy Series 2.5-Sone 80-CFM White Lighted Bluetooth bathroom fan Model #SPK80L equal or better
20. Provide and install new mirrored, recessed medicine cabinet, Project Source 16.13-in x 20.13-in surface/recessed mount stainless steel mirrored medicine cabinet or similar to existing in size.
21. Provide and install two (2) new towel bars, one (1) new toilet paper holder, and one (1) hand towel hook/ring, in locations that permit the greatest amount of space and mobility within the bathroom space. Color shall match.
22. Provide and install new "hard-mounted" (at Owner discretion) chrome shower curtain rod to fit shower

opening, centered at/about 78" to 80" above finished floor. Ensure proper fit with Owner-provided new shower curtain.

23. Install new vanity/lavatory 18"-20" D x 24"- 36" long, with Delta Foundations single-handle low-arc bathroom faucet Model # B510LF-PPU-12.
24. NOTE: ALL metal bathroom finish colors shall match and shall be chrome, or brushed nickel finish. (e.g., lavatory faucet, shower trim, and shower head, flush lever, towel bars, shower curtain rod, etc.)
25. Interior paint as necessary.

## Item 9 – Master bath

1. Complete interior demolition of existing hall bathroom, down to studs and slab.
2. Remove and properly dispose of all debris.
3. Repair or add sub-framing in walls if/as needed.
4. Make all necessary repairs and modifications to rough plumbing while walls are open and accessible, and schedule and pass required inspections. Test waste and supply lines for leaks.
5. Enlarge existing door open as large as possible.
6. Ensure that new shower stall is reconstructed according to current building codes and passes all required rough-in and final inspections during rehabilitation.
7. Provide and install solid wood backing to accommodate three (3) new ADA grab bars for shower: 36" to 42" on large back wall of shower area and a vertical 16" to 18" on each end of the shower enclosure (total of 3 bars to be installed in shower stall at Owner's direction)
8. Provide and install solid wood backing for installation of "hard mounted" shower curtain rod to be mounted at/or about 78" (Owner's direction) above finished floor to centerline.
9. Provide and install solid wood backing behind and beside toilet to accommodate two (2) new ADA grab bar, approximately 24 and 30-36".
10. Provide and install new insulation in ALL exterior open wall cavities, using batt, r-foil, or other insulation, as appropriate.
11. Provide and install, with approved fasteners, cement board backing on all walls and around window opening in shower/tub area. (tile backer or dura-rock, or equivalent).
12. Provide and install new moisture resistant gypsum-type wallboard on all other walls and ceilings, where needed, in bathroom and finish with smooth or very light texture.
13. *Rebuild shower stall, large (12x18 or larger) porcelain wall tile may be used (tile floor to ceiling), with all other appurtenances still included. (Large niche (stainless is acceptable), soap shelves and towel bar in shower stall) roll in shower is still required. Bathroom floor area shall be ceramic tile with shower portion sloped to drain. This may require removing and replacing concrete under shower area. (Prepare for roll in shower).*
14. Provide and install one large, recessed shampoo/soap niche where client chooses on shower wall, and two (2) surface mounted corner shelves for shampoo and soap storage in back corner.
15. Provide and install new Delta, single lever, "Classic" shower valve and trim.

16. Provide and install new Delta "ActivTouch" shower head/hand shower combo, *Model 51900 OR Equivalent with slide bar.*
17. Provide and install new ADA height, elongated white 2-piece toilet, WaterSense Certified, 1.28gpf, w/chrome flush lever and soft-close seat/lid. Toilet flange will need to be reset from the north wall.
18. Provide and install new ¼ -turn supply stop and supply line, new wax ring and new flange or stainless-steel flange repair ring (If broken or damaged) and nylon flange bolts (suggested). Ensure new toilet is level and secured properly and does not leak, use matching grout or caulk around base of new toilet at floor.
19. Provide and install new LED bathroom general lighting.
20. Install Broan Economy Series 2.5-Sone 80-CFM White Lighted Bluetooth Bathroom Fan Model #SPK80L equal or better
21. Install new flooring (refer to flooring section)
22. Provide and install new mirrored, recessed medicine cabinet, similar in size to the old cabinet that was removed.
23. Provide and install two (2) new towel bars, one (1) new toilet paper holder, and one (1) hand towel hook/ring, in locations that permit the greatest amount of space and mobility within the bathroom space. Color to match.
24. Provide and install new "hard-mounted" (at Owner's discretion) chrome shower curtain rod to fit shower opening, centered at/about 78" to 80" above finished floor. Ensure proper fit with Owner-provided new shower curtain.
25. Install new vanity/lavatory 18"-20" D x 24"- 36" Long. With Delta Foundations Single-Handle Low-Arc bathroom faucet Model # B510LF-PPU-12
26. NOTE: ALL metal bathroom finish colors to match and shall be chrome, or brushed nickel finish (e.g., lavatory faucet, shower trim and shower head, flush lever, towel bars, shower curtain rod, etc.).
27. Interior paint as necessary.

### Item 10 – Half bath

1. Provide and install new ADA height, elongated white 2-piece toilet, WaterSense Certified, 1.28gpf, w/chrome flush lever and soft-close seat/lid. Toilet flange will need to be reset from the north wall.
2. Provide and install new ¼ -turn supply stop and supply line, new wax ring and new flange or stainless-steel flange repair ring (If broken or damaged) and nylon flange bolts (suggested). Ensure new toilet is level and secured properly and does not leak, use matching grout or caulk around base of new toilet at floor.
3. Provide and install new LED bathroom general lighting.
4. Install Broan Economy Series 2.5-Sone 80-CFM White Lighted Bluetooth Bathroom Fan Model #SPK80L equal or better
5. Provide and install new mirrored, recessed medicine cabinet, save mirror.
6. Provide and install one (1) new toilet paper holder, one (1) hand towel hook/ring, in locations that permit the greatest amount of space and mobility within the bathroom space. Color to match.

7. Install new vanity/lavatory, match existing. With Delta Foundations Single-Handle Low-Arc bathroom faucet Model # B510LF-PPU-12
8. NOTE: ALL Metal Bathroom Finish Colors to match and shall be Chrome, or Brushed Nickel finish. (e.g., Lavatory faucet, shower trim and shower head, flush lever, towel bars, shower curtain rod, etc.)
9. Install Broan Economy Series 2.5-Sone 80-CFM White Lighted Bluetooth Bathroom Fan Model #SPK80L equal or better
10. Repair/replace damaged wall tile.
11. Interior paint as necessary.

### **Item 11 – Interior Repairs**

1. Replace all interior door/closet doors. Match existing.
2. Repair/ replace damaged ceilings throughout. Match surrounding texture.
3. Clean and inspect fireplace and chimney to include but not limited to, firebox, flue, damper. Provide report and repair options if necessary.
4. Replace damaged paneling. Match existing.

### **Item 12 –Kitchen Cabinets**

1. Remove and dispose of all existing cabinets, backsplash, countertops and OTR microwave.
2. Provide and install prefabricated cabinets with hardwood facings. Layout should at minimum remain the same with 30" wall cabinets. Include ADA compliant door and drawer hardware (\$3-\$5 min. price range each). Provide two (2) extra hardware.
3. Provide and install over the range microwave.
4. Provide and install Formica countertops with 4-inch backsplash, color will be selected by homeowner at contract signing.
5. Install new 8" stainless steel double bowl sink with single lever Delta faucet with sprayer, includes all related plumbing, water supplies and shut off valves.
6. Remove tile backsplash and install new drywall as needed. Paint kitchen walls/ceilings with acrylic latex materials.

### **Item 13 – Electrical**

1. Remove and properly dispose of existing electrical meter enclosure.
2. Remove and properly dispose of existing, Main feeder wire from meter to interior breaker panel(s).
3. Provide and install new meter enclosure, mast, and weather head with separate or integrated 200-amp main panel. Must meet all current NEC requirements as well as be compliant with the most current version of the Ocala Electric Utility's "Metering Enclosure and Equipment Standards".
4. Install new main disconnect, new main breaker(s) for interior sub-distribution panels (if required) and new panel must have multiple open slots for exterior/added circuits (minimum 6) and any other current NEC compliant circuits required for the home, unless provided for in existing interior distribution panels.

5. Provide and properly install new correctly sized for loads, main feeder wire from exterior disconnect/breaker, through attic cavity, properly secured/protected per codes, to feed existing interior breaker panels located in the garage area.
6. If any other circuits need to be added/corrected to meet code or for proper function for Owner, provide, and install all necessary components to bring into compliance.
7. NOTE: General Contractor shall relocate water heater to meet code compliance.

**Interior:**

1. Remove all lighting fixtures and/or ceiling fans on interior of home in addition to any specifically described in this section.
2. Provide and install new 42" ceiling fans in all bedrooms and living room (with wall switch), with new LED, Energy Star certified fixtures, and fans. All interior fixtures and bulbs should be between 3000K and 4000K color range. All fixtures and fans shall have "Owner changeable LED bulbs" and ceiling fans should be ceiling-hugger style.
3. In the kitchen area, provide and install new 48-inch LED fixture that is 3100 to 5000 lumens each, 4000K color, Energy Star in place of each old fixture that was removed. Suggested model Lithonia Lighting FMLL-14IN-80CRI -OR- equal/better.
4. Bathroom lights can be Project Source 3-Light Vanity Light Bar, Model#FV08-038
5. Hall lights can be Project Source 2-Light 13-in Brushed Nickel Flush Mount Light
6. Westside room(den) light can be Project Source 2-Light 13-in Brushed Nickel Flush Mount Light (mount in ceiling). Remove existing wall light and patch hole. Install wall outlets to code.
7. In the laundry/utility area, provide and install new Flush Mount 32-inch Round LED "Cloud-style" fixture. (Minimum 36-watt light output at 4000K+) Good Earth Model # LF1088-NMS-32LF2-G -OR- Equal.
8. Provide and install new LED bulbs, of appropriate design, wattage, and color, in all permanent fixtures throughout the home, that are not being replaced with new fixtures.
9. Inspect, check, and confirm proper function of all electrical outlets and switches throughout home, including GFCI devices.
10. Provide and replace all outlets(white), switches(white).
11. Install new electric range outlet.
12. Install 2 new energy star rated bath exhaust fans (1 in each bathroom) vented through the roof. Broan Roomside/Flex 1-Sone 110-CFM White Lighted Bathroom Fan ENERGY STAR Model #AER110CCTK
13. If bathroom, kitchen, or laundry outlets are not currently GFCI protected outlets/switches, provide, and install all needed materials to change to GFCI, outlets or breakers per code.

**Exterior:**

14. Install new HVAC disconnect and exterior GFCI outlet at condenser location, front and rear.
15. Remove and properly dispose of ALL outdoor security/floodlight fixtures.
16. Provide and install new LED Security Floodlight-type fixtures at each corner (total 4).

17. Security/Flood Lights must have at least two aimable LED bulbs in each fixture. Suggested – Good Earth Lighting, Model #SE1084-WH3-02LF0-G or Equal. Confirm with Owner if “Motion Activated” or not.
18. Remove and properly dispose of front/rear entry wall-mounted fixture.
19. If not otherwise specified in this section, provide, and install new LED fixtures, similar in design and function to the old fixture removed.
20. Provide and install new post lamp fixture on existing post if installed. Fixture should match or coordinate with front entry fixture.
21. Provide and install all LED (60-100-watt equivalent), dimmable bulbs as needed in new or remaining fixtures throughout exterior of the home.

**Smoke/CO Alarms:**

1. Remove and properly dispose of all old smoke alarms and mounting plates throughout the home.
2. Provide and install new CO/smoke combo alarms, throughout home. Minimum, one smoke alarm in each sleeping space and one combo CO/smoke alarm in each common-area immediately adjacent to sleeping space(s). ALL smoke and CO/smoke alarms MUST be interconnected, hardwired, on existing circuit if possible, or NEW dedicated arc fault breaker and, must have 10-year non-serviceable battery backups. NOTE: If new circuit is needed, this work will require a permit.
3. Existing locations where smoke alarms were previously located should be used, if possible, otherwise the old locations must be repaired and painted to “best match” of surrounding walls, texture and color.
4. Any devices requiring new wiring circuits/switches shall be included in the total price.
5. Any sub panels not needed can be removed.
6. Install necessary electrical circuits for a 16-seer electric heat pump HVAC system.
7. Contractor may be required to coordinate with other contractors during repairs.

**Item 14 – Exterior Repairs**

1. Remove tile/mastic/mortar/grout from front porch. Prepare concrete as per manufacturer’s instructions.
2. Paint with a concrete stain. Use Valspar Tintable Base Semi-transparent Concrete Stain Concentrate, equal/better.
3. Cover with manufacturer’s suggested sealer.

**Item 15 – Exterior Doors**

1. Replace front and back exterior doors and associated, jambs, casings, and trims.
2. Provide, install, and properly seal new pre-hung, steel or fiberglass six (6) panel door on rot-proof jambs, double-bored for entry locks and deadbolts. Confirm hinge and threshold colors will match lock sets. Ensure proper swing before ordering and that doors open and close smoothly and are fully sealed from exterior elements, light, water, air, etc. Ensure that new thresholds meet interior flooring in a neat and finished way or that an appropriate transition is installed to give a completed and “like new” appearance.
3. Provide and install new, rot resistant, exterior trim and new interior casing on all doors. Prime and paint doors and trim, and casing, interior and exterior, colors to match house trim or new color to be pre-approved by Owner AND Rehabilitation Specialist. Confirm dimensions, design, and door swing during

inspection for each door unit.

4. Provide and install door viewer, Model DS238, OR equivalent, into each new entry door, at a height agreed to by Owner. Color shall match door hardware.
5. Provide and install matching lever-style, Kwikset "SmartKey" entry locksets with deadbolts, keyed alike, (key to Owner keys). Provide "re-keying tool" and instructions to Owner at final inspection. (Finish color of lock hardware, hinges, and thresholds to be selected by Owner following contract signing).

### Item 16 – Flooring

1. Repair broken/cracked floor tile in family room.
2. Use crack isolation or uncoupling membrane on the area of repair to reduce the chance of future cracking.
3. Damaged area may need removal, grinding and /or chipping to bring level with surrounding floor. Remove tile as necessary to accommodate demo.
4. Replace tile as necessary, match existing as close as possible.

### Item P – Permits

The amount of \$200.00 is the estimated permit cost/allowance for this project.

At project closeout and before final payment, Contractor shall submit to homeowner, in a 3-ring binder to include:

- Prime Contractor's information w/warranty
- Sub-contractor information
- Registered roof warranty and claim information.
- All owner manuals/instructions
- Provide a list of the manufacturer, type, sheen/finish, and color of all coatings used and the respective locations where they were applied, to the Owner.
- Color choices (**all color/product choices and/or changes to previously agreed upon choices shall be done in writing**)

At project closeout and before final payment, Contractor shall submit to City Project Manager:

- Final payment affidavit
- Owner final acceptance of the work
- Material and/or contractor lien releases



8(a) certified, HUBZone certified, EDWOSB

•8786 Sonoma Coast Drive, Winter Garden, FL 34787

•(407)614-4572 Office

•(814)243-1927 Cell

•dkenvironmental@yahoo.com

•www.dk-environmental.com

©2023 DK Environmental & Construction Services, Inc. All rights reserved.

## ASBESTOS SURVEY REPORT

PREPARED FOR THE FOLLOWING PROPERTY:



1114 NW 13th Avenue  
Ocala, FL 34475

**PERFORMED ON:**

November 30, 2023

**PERFORMED AND PREPARED BY:**

A handwritten signature in black ink, appearing to read "Chris Ritko".

Chris Ritko  
Asbestos Building Inspector  
193196

**TABLE OF CONTENTS**

- I. INTRODUCTION**
- II. SURVEY SUMMARY**
- III. ASBESTOS OVERVIEW**
- IV. LIMITATIONS**
- V. ANALYTICAL RESULTS**
- VI. ASBESTOS RECOMMENDATIONS**
- VII. SURVEY FORMS**  
SAMPLING LOCATIONS FLOOR PLAN
- VIII. SITE PHOTOGRAPHS**
- IX. LICENSING**
- X. GLOSSARY**
- XI. LABORATORY REPORT**

**Confidentiality Notice:** This Asbestos Survey Report is intended only for the use of the individual or entity addressed, and may contain information that is privileged, confidential, and exempt from disclosure under applicable law. If you are not the intended recipient or responsible for delivering this report to the intended recipient, you are hereby notified that any dissemination, distribution, or copying of this report, in whole or in part, is prohibited. If you have received this report in error, please notify us immediately. Thank you.

**I. INTRODUCTION**

**Property Address:** 1114 NW 13th Avenue  
Ocala, FL 34475

**Property Owner:** Darrell Williams

**Survey Performed For:** City of Ocala, Community Development Services  
201 SE 3<sup>rd</sup> Street, 2<sup>nd</sup> Floor, Ocala, FL 34475

**Survey Performed By:** Chris Ritko, Asbestos Building Inspector

**Company:** DK Environmental & Construction Services  
8786 Sonoma Coast Drive  
Winter Garden, FL 34787  
407-614-4572

**Date of On-Site Survey:** November 30, 2023

**Date of Report:** December 06, 2023

DK Environmental & Construction Services, Inc. (DKE) has completed a limited Asbestos Survey at the property address listed above. This report contains the results of the Survey. The purpose of this Survey was to identify the presence of asbestos-containing materials that may be disturbed during planned renovation. This limited Asbestos Survey report presents data that describes the location of asbestos-containing material (ACM) identified in the subject property. This Survey was conducted on site by an EPA trained professional asbestos building inspector.

This report is intended for the exclusive use of our client. The findings are relevant to the conditions observed during the physical process of performing the Survey. These findings should not be treated as absolute, nor should they be relied upon to represent conditions at significantly later dates.

We appreciate the opportunity to provide environmental consulting services to your organization. If you have any questions or need additional assistance, please call (321)401-5094.



Chris Ritko  
Asbestos Building Inspector  
193196

## II. SURVEY SUMMARY

On November 30, 2023 an Asbestos Survey was performed at 1114 NW 13th Avenue, Ocala, FL 34475. The property is a single-family detached dwelling. It is 2,382 square feet and was constructed in 1991.

The purpose of this Survey was to identify the presence of asbestos-containing materials that may be disturbed during planned renovation. Limited bulk samples were collected and AHERA protocols were adhered to.

The Asbestos Survey consisted of three basic procedures: 1) conducting a visual inspection of the property; 2) identifying homogeneous areas (HAs) of suspect surfacing, thermal system insulation, and miscellaneous materials; and 3) sampling accessible, friable, and non-friable suspect materials. Some building components may have been inaccessible at the time of this screening, or were not tested because they were covered by other building materials (paneling, tile, siding, etc.). It is possible that ACMs may be hidden by these materials.

The property was visually inspected for the presence of building materials that are suspected to contain asbestos. With regard to asbestos, bulk material samples were collected and analyzed for asbestos content. These services were performed exercising the customary skill and competence of consulting professionals in the relevant disciplines in this region.

Bulk samples of identified suspect ACM were collected and placed into individual containers for transport to a National Voluntary Lab Accreditation Program (NVLAP)/American Industrial Hygiene Association (AIHA)-accredited laboratory for analysis. The collection of bulk samples consisted of physically removing a small piece of material and placing it in a marked, airtight container. The sample container identification numbers were also recorded in the field notes.

## III. ASBESTOS OVERVIEW

Asbestos is a generic name given to a fibrous variety of naturally occurring minerals that have been used for many years in commercial products, based on specific properties of the minerals. Asbestos occurs in fiber bundles, which are composed of long and thin fibers that can be easily separated from one another. These mineral products possess high tensile strength, flexibility, resistance to chemical and thermal degradation, and high electrical resistance. The minerals are easily woven into various types of textiles, fabrics, cloths, sheets, panels, or mixed into adhesives, coatings, surfacing materials and cement products. Typically asbestos-containing building materials (ACBM) are segregated into three categories: Thermal System Insulation (TSI) usually found on pipes, boilers, and HVAC ducts; surfacing materials such as sprayed or troweled-on fireproofing and insulation, and plasters; and miscellaneous materials including vinyl composite floor tiles, floor sheeting, adhesives, roofing materials, window glazing and cement products.

*Friable* asbestos-containing material (ACM), is defined as any material containing more than one percent (1%) asbestos as determined using the method specified in Appendix A, Subpart F, 40 CFR Part 763, Section 1, Polarized Light Microscopy (PLM), that, when dry, can be crumbled, pulverized or reduced to powder by hand pressure. (Sec. 61.141)

*Nonfriable* ACM is any material containing more than one percent (1%) asbestos as determined using the method specified in Appendix A, Subpart F, 40 CFR Part 763, Section 1, Polarized Light Microscopy (PLM), that, when dry, cannot be crumbled, pulverized, or reduced to powder by hand pressure. EPA also defines two categories of nonfriable ACM, Category I and Category II nonfriable ACM, which are described later in this guidance.

*"Regulated Asbestos-Containing Material"* (RACM) is (a) friable asbestos material, (b) Category I nonfriable ACM that has become friable, (c) Category I nonfriable ACM that will be or has been subjected to sanding, grinding, cutting or abrading, or (d) Category II nonfriable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of demolition or renovation operations.

The EPA's National Emission Standard for Hazardous Air Pollutants (NESHAP) regulations and the Florida Department of Environmental Protection (FDEP) Asbestos program regulate the removal and disposal of asbestos-containing building materials (any material containing more than 1% asbestos).

Potential effects on workers or occupants in buildings where asbestos-containing materials (ACM) are present may occur when exposure to asbestos fibers is caused by deterioration, damage or renovation disturbance of ACMs. Federal regulations pertaining to asbestos include 40 Code of Federal Regulations (CFR) 763 (a subchapter of the Toxic Substance Control Act (TSCA)); Occupational Safety and Health Act (OSHA) 29 CFR 1910 Subpart Z and 29 CFR 1926 Subpart Z.

***Asbestos NESHAP regulations must be followed for demolitions and/or renovations of facilities with at least 260 linear feet of regulated asbestos-containing materials (RACM) on pipes, 160 square feet of regulated asbestos-containing materials on other facility components, or at least 35 cubic feet of facility components where the amount of RACM previously removed from pipes and other facility components could not be measured before stripping. If dimensions fall below these thresholds, Asbestos NESHAP regulations need not be followed for demolition and/or renovation activities.***

#### IV. LIMITATIONS

This report has been prepared to assist in evaluating the potential presence of asbestos-containing material in the property. The objective of this assessment was to perform the work with care, exercising the customary skill and competence of consulting professionals in the relevant disciplines in this region. The conclusions presented in this report are professional opinions based upon visual observations of the site at the time of DKE's investigation and the results of laboratory analysis. The opinions presented herein apply to site conditions existing at the time of our investigation and those reasonably foreseeable. DKE cannot act as insurers, and no express or implied representation or warrant is included or intended in our report except that our work was performed, within the limits prescribed by our client, with the customary thoroughness and competence of our profession at the time and place the services were rendered. DKE cannot and will not warrant that this Asbestos Survey that was requested by the client will satisfy the dictates of, or provide a legal defense in connection with, any environmental laws or regulations. It is the responsibility of the client to know and abide by all applicable laws, regulations, and standards. The results reported and conclusions reached by DKE are solely for the benefit of the client. The results and opinions in this report, based solely upon the conditions found on the property as of the date of the Survey, will be valid only as of the date of the Survey.

Please note that the test results relate only to those homogeneous materials tested. If conditions or materials, other than those addressed in this report are encountered during the planned renovation/demolition activities, DKE should be contacted to assess the potential impact of these materials or conditions relative to the findings or recommendations included herein. The survey was performed by observing suspect materials throughout the structure where accessible. DKE must emphasize that it is not possible to look within every location of a building. The visual survey documents only general locations of suspect materials but does not determine exact boundaries. Concealed locations of asbestos may exist at the subject property, and the levels may vary from those stated in this report. There may be variations in the composition of materials which appear similar. Materials may be hidden from view and not accessible. No attempt was made to disassemble equipment or demolish structural elements and finishes as this is beyond the scope of our authorized services. Visual observations were made only at safe and convenient locations. Due to these limitations, wall voids, flooring under carpet, building cavities and mechanical equipment, and other areas may contain unreported asbestos-containing materials. Suspect materials not previously identified in this report may be encountered during any renovation/demolition activity. These materials should be assumed asbestos containing material until sample collection and subsequent analysis prove otherwise. Unsafe structures should be assumed to contain asbestos materials unless the suspect material is noted as sampled. All fire doors should be assumed asbestos containing material since disassembly of locks and/or other work to access the door insulation is not possible.

**V. ANALYTICAL RESULTS**

Samples were analyzed by Hayes Microbial Consulting in Midlothian, VA. Hayes Microbial Consulting is an American Industrial Hygiene Association (AIHA)-accredited laboratory.

All samples were analyzed utilizing Polarized Light Microscopy (PLM) according to EPA Method 600/R-93/116. Any material that contains greater than one percent asbestos is considered an ACM and must be handled according to the Occupational Safety and Health Administration (OSHA), EPA and applicable state and local regulations.

The following table contains information regarding bulk samples found to contain asbestos by definition. The laboratory report has also been included at the end of this report.

<b>Bulk Collection and Sample Analysis Results</b>						
<i>Sample Number</i>	<i>Description</i>	<i>Condition</i>	<i>Friable</i>	<i>Asbestos Percent and Type</i>	<i>Location/ Amount</i>	<i>NESHAP Category</i>
1114-1-1	Insulation/White	Intact	No	None Detected	Typical Interior	NA
1114-1-2	Insulation/White	Intact	No	None Detected	Typical Interior	NA
1114-2-1	Insulation/White	Intact	No	None Detected	Typical Interior Walls/Ceilings	NA
1114-2-1	Brittle/Gray	Intact	No	None Detected	Typical Interior Walls/Ceilings	NA
1114-2-1	Drywall/White/Brown	Intact	Yes	None Detected	Typical Interior Walls/Ceilings	NA
1114-2-1	Joint Compound/Off-White	Intact	No	None Detected	Typical Interior Walls/Ceilings	NA
1114-2-2	Insulation/White	Intact	No	None Detected	Typical Interior Walls/Ceilings	NA
1114-2-2	Brittle/Gray	Intact	No	None Detected	Typical Interior Walls/Ceilings	NA
1114-2-2	Drywall/White/Brown	Intact	Yes	None Detected	Typical Interior Walls/Ceilings	NA
1114-3-1	12"x12" Floor Tile/Yellow	Intact	No	None Detected	Interior Bedrooms	NA
1114-3-1	Adhesive/Clear	Intact	No	None Detected	Interior Bedrooms	NA

**Bulk Collection and Sample Analysis Results**

Sample Number	Description	Condition	Friable	Asbestos Percent and Type	Location/ Amount	NESHAP Category
1114-3-2	12"x12" Floor Tile/Yellow	Intact	No	None Detected	Interior Bedrooms	NA
1114-3-2	Adhesive/Clear	Intact	No	None Detected	Interior Bedrooms	NA
1114-4-1	12"x12" Floor Tile/White	Intact	No	None Detected	Interior Laundry Room	NA
1114-4-1	Adhesive/Yellow	Intact	No	None Detected	Interior Laundry Room	NA
1114-4-2	12"x12" Floor Tile/White	Intact	No	None Detected	Interior Laundry Room	NA
1114-4-2	Adhesive/Yellow	Intact	No	None Detected	Interior Laundry Room	NA
1114-5-1	Asphalt Shingle/Black	Intact	No	None Detected	Typical Exterior Roof	NA
1114-5-1	Tar/Black	Intact	No	None Detected	Typical Exterior Roof	NA
1114-5-2	Asphalt Shingle/Black	Intact	No	None Detected	Typical Exterior Roof	NA
1114-5-2	Tar/Black	Intact	No	None Detected	Typical Exterior Roof	NA

**VI. ASBESTOS RECOMMENDATIONS**

***Asbestos NESHAP regulations must be followed for demolitions and/or renovations of facilities with at least 260 linear feet of regulated asbestos-containing materials (RACM) on pipes, 160 square feet of regulated asbestos-containing materials on other facility components, or at least 35 cubic feet of facility components where the amount of RACM previously removed from pipes and other facility components could not be measured before stripping. If dimensions fall below these thresholds, Asbestos NESHAP regulations need not be followed for demolition and/or renovation activities.***

The EPA and NESHAP recommend that a point-counting procedure be utilized for confirmation of asbestos percentage in friable materials that are visually estimated by PLM methodology to contain less than 10% asbestos. The 400 Point Count Procedure referenced in EPA 600/M4-82-020 (1987) and EPA 600/R-93/116 (1993) is commonly employed. Without the material being point counted or if point counting determined that material contains greater than one percent asbestos, it

would be deemed an asbestos containing material and would need to be removed by a Florida licensed asbestos contractor prior to disturbance.

Disturbances to Asbestos Containing Materials:

- Should be performed by a Florida Licensed Asbestos Abatement Contractor
- U.S. Occupational Safety and Health Administration (OSHA) regulations apply to the disturbance of material; containing any percentage of asbestos fibers as outlined in 29 CFR 1926.1101-OSHA's Asbestos Standard for the Construction Industry. The contractor will need to comply with the specific training, duties and responsibilities outlined in this CFR.
- OSHA 29 CFR 1910.1001. OSHA 29 CFR 1910.1001 requires the communication of information concerning asbestos hazards. Employees engaged in work activities with installed ACM may be exposed to asbestos fibers. The owner or operator should take the necessary steps to reduce the potential for disturbance.

EPA National Emission Standards for Hazardous Air Pollutants (NESHAP) is applicable to amounts of asbestos that contains at least 260 linear feet on pipes or at least 160 square feet on other facility components, or (ii) At least 35 cubic feet off facility components where the length or area could not be measured previously.

The EPA's National Emission Standard for Hazardous Air Pollutants (NESHAP) regulations and the Florida Department of Environmental Protection (DEP) Asbestos program regulate the removal and disposal of asbestos-containing building materials. The Florida Department of Environmental Protection (DEP) administers an asbestos removal program under Chapter 62-257, Florida Administrative Code. The Asbestos NESHAP has been adopted by reference in section 62-204.800, Florida Administrative Code. The program's intent is to minimize the release of asbestos fibers during activities involving the processing, handling, and disposal of asbestos-containing material.

The regulations of these agencies require the removal of friable asbestos-containing materials prior to extensive renovation or demolition projects, and the removal of non-friable asbestos-containing materials that may be rendered friable in the course of renovation or demolition projects. Only a Florida licensed asbestos contractor using properly trained, certified, and licensed asbestos workers can perform asbestos removal projects in Florida. Air monitoring during and after abatement activities is also recommended to document the fiber levels inside and outside the abatement work area.

The asbestos NESHAP requires that an asbestos trained person be on site i.e. 40 CFR 61.145 (c) (8) states in part "no RACM shall be stripped, removed, or otherwise handled or disturbed at a facility regulated by this section unless at least

one on-site representative, such as a foreman or management level person or other authorized person, trained in the provisions of this regulation and the means of complying with them is present.”

DEP recommends that this “trained person” be on site when non-friable ACM is present so that developing problems can be caught early and corrected without delay. In addition, the regulations require the owner of the building and/or the operator to notify the applicable DEP District Office or Local Pollution Control Agency before any demolition, or before renovations of buildings that contain a certain threshold amount of asbestos or asbestos containing materials.

Florida requires the submission of a 10-Day Notification for all renovations and demolitions of facilities with at least 260 linear feet of regulated asbestos-containing materials (RACM), 160 square feet of regulated asbestos containing materials on other facility components, or at least 35 cubic feet off facility components. Asbestos waste requires disposal at an approved solid waste disposal facility.

Local agencies may also have specific requirements for demolition/renovation projects involving asbestos-containing building materials.

OSHA 29 CFR 1910.1001 requires the communication of information concerning asbestos hazards. Employees engaged in work activities with installed ACM may be exposed to asbestos fibers. The owner or operator should take the necessary steps to reduce the potential for disturbance.

29 CFR 1926.1101- OSHA's Asbestos Standard for the Construction Industry does apply to the abatement, renovation and/or demolition of all buildings identified with asbestos containing material. The contractor will need to comply with the specific training, duties and responsibilities outlined in this CFR.

If asbestos containing materials identified within, or on, the property will be disturbed or otherwise caused to become friable within the scope of the renovation, they should be removed from the structures prior to the maneuvers taking place according to applicable regulations.


No other recommendations regarding asbestos containing materials are required at this time. In the event concealed building materials are discovered during future renovation or demolition activities, which are suspected to contain asbestos, the materials should be sampled and analyzed to confirm the presence of asbestos prior to the disturbing such materials.

VII. SURVEY FORMS



DK Environmental & Construction Services, Inc.  
 8786 Sonoma Coast Drive, Winter Garden, FL 34787  
 407-614-4572 814-243-1927  
 dkenvironmental@yahoo.com

SITE PLAN

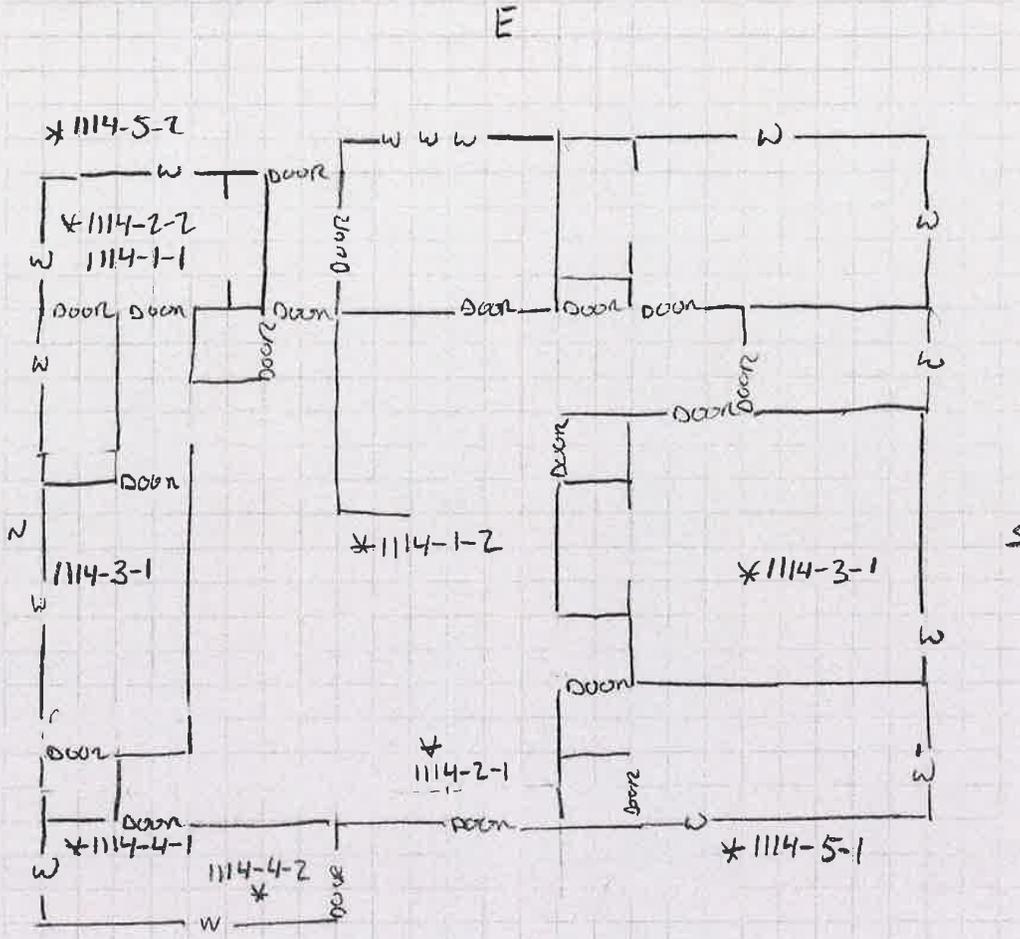

Case # \_\_\_\_\_

Address 1114 NW 13<sup>th</sup> Ave  
Ocala, FL 34475

**VIII. SITE PHOTOGRAPHS**



1114-1  
Insulation  
Typical Interior



1114-2  
Drywall/Joint Compound  
Typical Interior Walls/Ceilings



1114-3  
12"x12" Floor Tile/Adhesive  
Interior Bedrooms



1114-4  
12"x12" Floor Tile/Adhesive  
Interior Laundry Room



1114-5  
Asphalt Shingle/Tar  
Typical Exterior Roof

IX. LICENSING



## X. GLOSSARY

**Active waste disposal site:** any disposal site other than an inactive site.

**Adequately wet:** sufficiently mix or penetrate with liquid to prevent the release of particulates. If visible emissions are observed coming from asbestos-containing material, then that material has not been adequately wetted. However, the absence of visible emissions is not sufficient evidence of being adequately wet.

**Asbestos:** the asbestiform varieties of serpentinite (chrysotile), riebeckite (crocidolite), cummingtonite-grunerite, anthophyllite, and actinolite-tremolite.

**Asbestos-containing waste materials:** mill tailings or any waste that contains commercial asbestos and is generated by a source subject to the provisions of this subpart. This term includes filters from control devices, friable asbestos waste material, and bags or other similar packaging contaminated with commercial asbestos. As applied to demolition and renovation operations, this term also includes regulated asbestos-containing material waste and materials contaminated with asbestos including disposable equipment and clothing.

**Asbestos mill:** any facility engaged in converting, or in any intermediate step in converting, asbestos ore into commercial asbestos. Outside storage of asbestos material is not considered a part of the asbestos mill.

**Asbestos tailings:** any solid waste that contains asbestos and is a product of asbestos mining or milling operations.

**Asbestos waste from control devices:** any waste material that contains asbestos and is collected by a pollution control device.

**Category I nonfriable asbestos-containing material (ACM):** asbestos-containing packings, gaskets, resilient floor covering, and asphalt roofing products containing more than 1 percent asbestos as determined using the method specified in appendix E, subpart E, 40 CFR part 763, section 1, Polarized Light Microscopy.

**Category II nonfriable ACM:** any material, excluding Category I nonfriable ACM, containing more than 1 percent asbestos as determined using the methods specified in appendix E, subpart E, 40 CFR part 763, section 1, Polarized Light Microscopy that, when dry, cannot be crumbled, pulverized, or reduced to powder by hand pressure.

**Commercial asbestos:** any material containing asbestos that is extracted from ore and has value because of its asbestos content.

**Cutting:** to penetrate with a sharp-edged instrument and includes sawing, but

does not include shearing, slicing, or punching.

**Demolition:** the wrecking or taking out of any load-supporting structural member of a facility together with any related handling operations or the intentional burning of any facility.

**Emergency renovation operation:** a renovation operation that was not planned but results from a sudden, unexpected event that, if not immediately attended to, presents a safety or public health hazard, is necessary to protect equipment from damage, or is necessary to avoid imposing an unreasonable financial burden. This term includes operations necessitated by nonroutine failures of equipment.

**Fabricating:** any processing (e.g., cutting, sawing, drilling) of a manufactured product that contains commercial asbestos, with the exception of processing at temporary sites (field fabricating) for the construction or restoration of facilities. In the case of friction products, fabricating includes bonding, debonding, grinding, sawing, drilling, or other similar operations performed as part of fabricating.

**Facility:** any institutional, commercial, public, industrial, or residential structure, installation, or building (including any structure, installation, or building containing condominiums or individual dwelling units operated as a residential cooperative, but excluding residential buildings having four or fewer dwelling units); any ship; and any active or inactive waste disposal site. For purposes of this definition, any building, structure, or installation that contains a loft used as a dwelling is not considered a residential structure, installation, or building. Any structure, installation or building that was previously subject to this subpart is not excluded, regardless of its current use or function.

**Facility component:** any part of a facility including equipment.

**Friable asbestos material:** any material containing more than 1 percent asbestos as determined using the method specified in appendix E, subpart E, 40 CFR part 763 section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure. If the asbestos content is less than 10 percent as determined by a method other than point counting by polarized light microscopy (PLM), verify the asbestos content by point counting using PLM.

**Fugitive source:** any source of emissions not controlled by an air pollution control device.

**Glove bag:** a sealed compartment with attached inner gloves used for the handling of asbestos-containing materials. Properly installed and used, glove bags provide a small work area enclosure typically used for small-scale asbestos stripping operations. Information on glove-bag installation, equipment and supplies, and work practices is contained in the Occupational Safety and Health

Administration's (OSHA's) final rule on occupational exposure to asbestos (appendix G to 29 CFR 1926.58).

**Grinding:** to reduce to powder or small fragments and includes mechanical chipping or drilling.

**In poor condition:** the binding of the material is losing its integrity as indicated by peeling, cracking, or crumbling of the material.

**Inactive waste disposal site:** any disposal site or portion of it where additional asbestos-containing waste material has not been deposited within the past year. Installation means any building or structure or any group of buildings or structures at a single demolition or renovation site that are under the control of the same owner or operator (or owner or operator under common control).

**Leak-tight:** solids or liquids cannot escape or spill out. It also means dust-tight.

**Malfunction:** any sudden and unavoidable failure of air pollution control equipment or process equipment or of a process to operate in a normal or usual manner so that emissions of asbestos are increased. Failures of equipment shall not be considered malfunctions if they are caused in any way by poor maintenance, careless operation, or any other preventable upset conditions, equipment breakdown, or process failure.

**Manufacturing:** the combining of commercial asbestos-or, in the case of woven friction products, the combining of textiles containing commercial asbestos-with any other material(s), including commercial asbestos, and the processing of this combination into a product. Chlorine production is considered a part of manufacturing.

**Natural barrier:** a natural object that effectively precludes or deters access. Natural barriers include physical obstacles such as cliffs, lakes or other large bodies of water, deep and wide ravines, and mountains. Remoteness by itself is not a natural barrier.

**Nonfriable asbestos-containing material:** any material containing more than 1 percent asbestos as determined using the method specified in appendix E, subpart E, 40 CFR part 763, section 1, Polarized Light Microscopy, that, when dry, cannot be crumbled, pulverized, or reduced to powder by hand pressure.

**Nonscheduled renovation operation:** a renovation operation necessitated by the routine failure of equipment, which is expected to occur within a given period based on past operating experience, but for which an exact date cannot be predicted.

**Outside air:** the air outside buildings and structures, including, but not limited to, the air under a bridge or in an open air ferry dock.

**Owner or operator of a demolition or renovation activity:** any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

**Particulate asbestos material:** finely divided particles of asbestos or material containing asbestos.

**Planned renovation operations:** a renovation operation, or a number of such operations, in which some RACM will be removed or stripped within a given period of time and that can be predicted. Individual nonscheduled operations are included if a number of such operations can be predicted to occur during a given period of time based on operating experience.

**Regulated asbestos-containing material (RACM):** (a) Friable asbestos material, (b) Category I nonfriable ACM that has become friable, (c) Category I nonfriable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading, or (d) Category II nonfriable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of demolition or renovation operations regulated by this subpart.

**Remove:** to take out RACM or facility components that contain or are covered with RACM from any facility.

**Renovation:** altering a facility or one or more facility components in any way, including the stripping or removal of RACM from a facility component. Operations in which load-supporting structural members are wrecked or taken out are demolitions.

**Resilient floor covering:** asbestos-containing floor tile, including asphalt and vinyl floor tile, and sheet vinyl floor covering containing more than 1 percent asbestos as determined using polarized light microscopy according to the method specified in appendix E, subpart E, 40 CFR part 763, Section 1, Polarized Light Microscopy.

**Roadways:** surfaces on which vehicles travel. This term includes public and private highways, roads, streets, parking areas, and driveways.

**Strip:** to take off RACM from any part of a facility or facility components.

**Structural member:** any load-supporting member of a facility, such as beams and load supporting walls; or any nonload-supporting member, such as ceilings and nonload-supporting walls.

**Visible emissions:** any emissions, which are visually detectable without the aid of instruments, coming from RACM or asbestos-containing waste material, or from any asbestos milling, manufacturing, or fabricating operation. This does not include condensed, uncombined water vapor.

**Waste generator:** any owner or operator of a source covered by this subpart whose act or process produces asbestos-containing waste material.

**Waste shipment record:** the shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

**Working day:** Monday through Friday and includes holidays that fall on any of the days Monday through Friday.



#23052627

Analysis Report prepared for

# DK Environmental & Construction Services, Inc.

8786 Sonoma Coast Drive  
Winter Garden, FL 34787

Phone: (814) 243-1927

1114 NW 13th Ave.  
Ocala, FL 34475

Collected: November 30, 2023  
Received: December 4, 2023  
Reported: December 5, 2023



EPA Laboratory ID: VA01419

Hayes Microbial Consulting, LLC.

3005 East Boundary Terrace, Suite F, Midlothian, VA. 23112

(804) 562-3435

contact@hayesmicrobial.com

Page: 1 of 4

We would like to thank you for trusting Hayes Microbial for your analytical needs!  
We received 10 samples by US Mail in good condition for this project on December 4th, 2023.

The results in this analysis pertain only to this job, collected on the stated date, and should not be used in the interpretation of any other job. Information supplied by the customer can affect the validity of results. These results apply only to the samples as received. This report may not be duplicated, except in full, without the written consent of Hayes Microbial Consulting, LLC.

All information provided to Hayes Microbial is confidential information relating to our customers and their clients. We will not disclose, copy, or distribute any information verbally or written, except to those designated by the customer(s). We take confidentiality very seriously. No changes to the distribution list will be made without the express consent of the customer.

This laboratory bears no responsibility for sample collection activities, analytical method limitations, or your use of the test results. Interpretation and use of test results are your responsibility. Any reference to health effects or interpretation of mold levels is strictly the opinion of Hayes Microbial. In no event, shall Hayes Microbial or any of its employees be liable for lost profits or any special, incidental or consequential damages arising out of the use of these test results.

Steve Hayes, BSMT (ASCP)  
Laboratory Director  
Hayes Microbial Consulting, LLC.



Lab ID: #188863

DPH License: #PH-0198



#23052627

Asbestos PLM Bulk  
EPA 600/R-93/116; EPA 40 CFR Appendix E to Subpart E of Part 763

Chris Ritko, MRSA2640  
DK Environmental & Construction Services, Inc.  
8786 Sonoma Coast Drive  
Winter Garden, FL 34787  
(814) 243-1927

1114 NW 13th Ave.  
Ocala, FL 34475

#	Sample	Material Description	Non-Fibrous	Non-Asbestos Fibers	Asbestos Fibers
1	1114-1-1 - Ins / Typ Int	Homogenous / Insulation / White	10%	90% Mineral/Glass wool	None Detected
2	1114-1-2 - Ins / Typ Int	Homogenous / Insulation / White	10%	90% Mineral/Glass wool	None Detected
3	1114-2-1 - DW, JC / Int	Homogenous / Insulation / White	10%	90% Mineral/Glass wool	None Detected
		Homogenous / Brittle / Gray	100%		None Detected
		Heterogenous / Drywall / White/Brown	90%	10% Cellulose Fibers	None Detected
		Homogenous / Joint Compound / Off-White	100%		None Detected
4	1114-2-2 - DW, JC / Int	Homogenous / Insulation / White	10%	90% Mineral/Glass wool	None Detected
		Homogenous / Brittle / Gray	100%		None Detected
		Homogenous / Drywall / White/Brown	90%	10% Cellulose Fibers	None Detected
5	1114-3-1 - 12x12 Floor Tile / Mastic / Bedrooms / Int	Heterogenous / Vinyl Tile / Yellow	100%		None Detected
		Homogenous / Adhesive / Clear	100%		None Detected
6	1114-3-2 - 12x12 Floor Tile / Mastic / Bedrooms / Int	Heterogenous / Vinyl Tile / Yellow	100%		None Detected
		Homogenous / Adhesive / Clear	100%		None Detected

Lab Note: Joint Compound Not Observed.

Collected: Nov 30, 2023

Received: Dec 4, 2023

Reported: Dec 5, 2023

Project Analyst:  
Samuel Settle, *Samuel Settle*

Reviewed By:  
Brian Keith, *Brian Keith*

Date:  
12 - 05 - 2023

Date:

12 - 05 - 2023



3005 East Boundary Terrace, Suite F. Midlothian, VA. 23112 (804) 562-3435 contact@hayesmicrobial.com

#23052627

**Chris Ritko, MRSA2640**  
**DK Environmental & Construction Services, Inc.**  
 8786 Sonoma Coast Drive  
 Winter Garden, FL 34787  
 (814) 243-1927

1114 NW 13th Ave.  
 Ocala, FL 34475

**Asbestos PLM Bulk**  
 EPA 600/R-93/116; EPA 40 CFR Appendix E of Part 763

#	Sample	Material Description	Non-Fibrous	Non-Asbestos Fibers	Asbestos Fibers
7	1114-4-1 - 12x12 Floor Tile / Mastic / Laundry Rm / Int	Homogenous / Floor Tile / White	100%		None Detected
		Homogenous / Adhesive / Yellow	100%		None Detected
8	1114-4-2 - 12x12 Floor Tile / Mastic / Laundry Rm / Int	Homogenous / Floor Tile / White	100%		None Detected
		Homogenous / Adhesive / Yellow	100%		None Detected
9	1114-5-1 - Roof Shingle / Tar / Typ Ext	Homogenous / Shingle / Black	85%	15% Fiberglass	None Detected
		Homogenous / Tar / Black	100%		None Detected
10	1114-5-2 - Roof Shingle / Tar / Typ Ext	Homogenous / Shingle / Black	85%	15% Fiberglass	None Detected
		Homogenous / Tar / Black	100%		None Detected

Collected: Nov 30, 2023  
 Received: Dec 4, 2023  
 Reported: Dec 5, 2023

Project Analyst: Samuel Settle  
 Samuel Settle  
 (804) 562-3435  
 contact@hayesmicrobial.com

Date: 12-05-2023  
 Date: 12-05-2023

Reviewed By: Brian Keith



#23052627

Asbestos Analysis Information

Chris Ritko, MRSA2640  
 DK Environmental & Construction Services, Inc.  
 8786 Sonoma Coast Drive  
 Winter Garden, FL 34787  
 (814) 243-1927

1114 NW 13th Ave.  
 Ocala, FL 34475

<b>Analysis Details</b>	All samples were received in acceptable condition unless otherwise noted on the report. This report must not be used by the client to claim product certification, approval, or endorsement by AIHA, NIST, NVLAP, NY ELAP, or any agency. The results relate only to the items tested. Hayes Microbial Consulting reserves the right to dispose of all samples after a period of 60 days in compliance with state and federal guidelines.
<b>PLM Analysis</b>	All Polarized Light Microscopy (PLM) results include an inherent uncertainty of measurement associated with estimating percentages by PLM. Materials with interfering matrix, low asbestos content, or small fiber size may require additional analysis via TEM Analysis.
<b>TEM Analysis</b>	Analysis by TEM is capable of providing positive identification of asbestos type(s) and semi-quantitation of asbestos content.
<b>Definitions</b>	'None Detected' - Below the detected reporting limit of 1% unless point counting is performed, then the detected reporting limit is .25%.
<b>New York ELAP</b>	Per NY ELAP198.6 (NOB), TEM is the only reliable method to declare an NOB material as Non-Asbestos Containing. Any NY ELAP samples that are subcontracted to another laboratory will display the name and ELAP Lab Identification number in the report page heading of those samples. The original report provided to Hayes Microbial Consulting is available upon request.



