


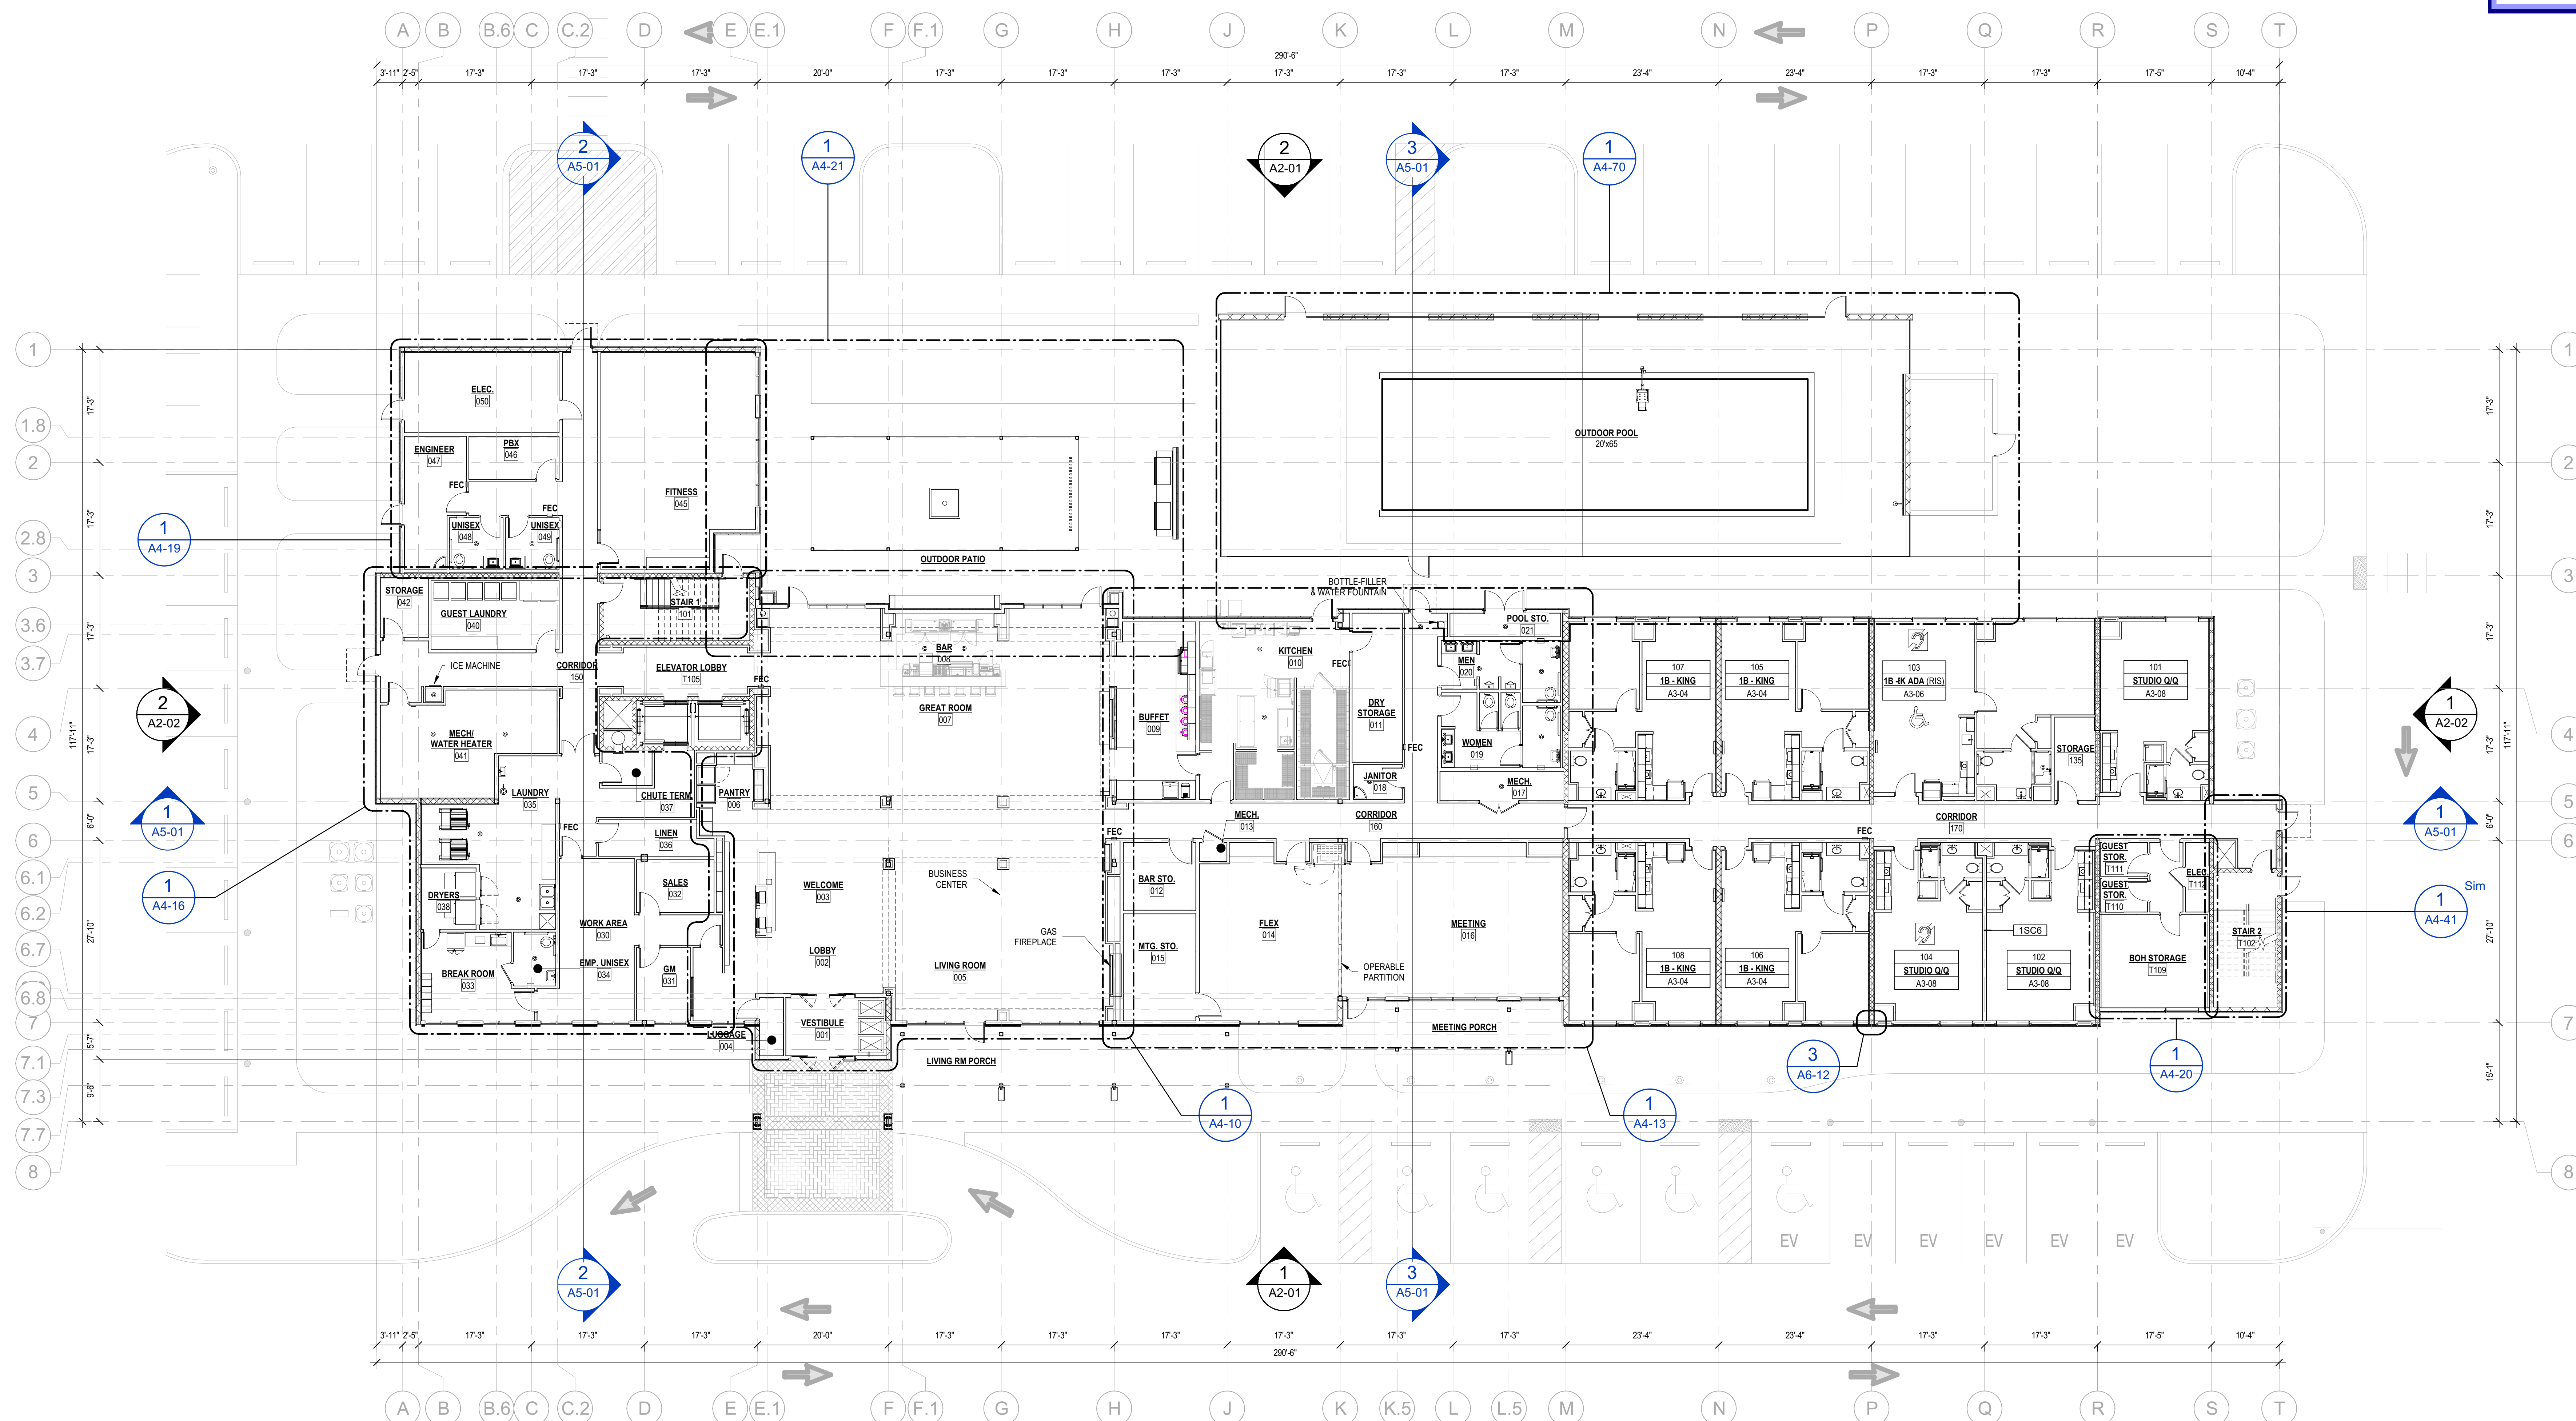

1 OVERALL PLAN - LEVEL 01
3/32" = 1'-0"

GENERAL NOTES

1. ALL CONSTRUCTION IS INTENDED TO BE IN CONFORMANCE W/ FEDERAL & STATE LAWS, CURRENT LOCAL ORDINANCES & BUILDING CODES, & ACCESSIBILITY CODES.
2. AUTOMATIC FIRE SPRINKLER SYSTEM MUST BE REVIEWED AND APPROVED BY THE AUTHORITY HAVING JURISDICTION.
3. FIRE ALARM SYSTEM IS REQUIRED. SYSTEM MUST BE REVIEWED AND APPROVED BY THE FIRE DEPARTMENT.
4. CONTRACTOR TO VERIFY ALL DIMENSIONS W/ MANUFACTURER ON FIXTURES AND EQUIPMENT SUPPLIED, PRIOR TO CONSTRUCTION.
5. REFER TO SHEET FOR PATIO AND FRONT PORCH.
6. REFER TO ENLARGED UNIT PLANS FOR UNIT DOOR NUMBERS.
7. WINDOWS WITHIN 24" OF DOOR TO BE SAFETY GLASS. ALL GLAZING IN HAZARDOUS LOCATIONS SHOULD BE TEMPERED FOR RESISTANCE. GLASS WITHIN 18" FROM FLOOR, WITHIN 24" ARC FROM DOORS EDGE, AND IF BOTTOM EDGE OF GLAZING IS LESS THAN 60" ABOVE THE WALKING SURFACE, SUCH GLASS SHOULD BE TEMPERED.
8. BLOCKING IS REQUIRED FOR ANY WALL HUNG EQUIPMENT, TOILET ACCESSORIES, SHELIVING, SHOWER SEAT, EXTERIOR LIGHT FIXTURES, ETC.
9. REFER TO ENLARGED PLANS FOR ADDITIONAL INFORMATION INCLUDING DIMENSIONS.
10. WALL MOUNTED GRILLES OR LOUVERS WITHIN GUESTROOM CORRIDORS TO BE SP-PT-8. WALL MOUNTED GRILLES OR LOUVERS WITHIN PUBLIC AREAS TO BE SP-PT-2.
11. FOR DOOR FINISHES, REFER TO DOOR SCHEDULE.