

2/20/2024

# Cumberland

TRUCK / IDEALEASE / BUS / FIRE / SPOTTER

CUMBERLAND-COMPANIES.COM

◆ 2017 AND 2018 DEALER OF THE YEAR

## FLORIDA SHERIFF'S ASSOCIATION Contract - BID FSA23-VEH21

Customer: City of Ocala  
Date of Quote: 2/19/2024

Specification: 60 Region: Central  
Base Price: 2025 INTERNATIONAL HX

**Contract Options:**

		Quantity	Unit Cost	extended
		1	\$ 128,500.00	\$ 128,500.00
1GBP	Frame reinforcement	1	\$ 1,624.00	\$ 1,624.00
1VBC	Heavy front tow pin	1	\$ 578.00	\$ 578.00
1WXM	Wheel base range	1	\$ 978.00	\$ 978.00
2ARY	20,000 front axle	1	\$ 1,715.00	\$ 1,715.00
3AGA	20,000 front suspension	1	\$ 507.00	\$ 507.00
4722	DV 2 drain valve	1	\$ 100.00	\$ 100.00
4WZJ	Air tank location	1	\$ 352.00	\$ 352.00
5PTB	Dual steering gears	1	\$ 811.00	\$ 811.00
8HAE	Body builder wiring	1	\$ 254.00	\$ 254.00
8RPS	Bluetooth radio	1	\$ 338.00	\$ 338.00
12EWW	Cummins X15 450 HP engine	1	\$ 408.00	\$ 408.00
13BDY	Allison 4000 RDS transmission	1	\$ 16,490.00	\$ 16,490.00
13WCU	Oil cooler	1	\$ 960.00	\$ 960.00
13WVV	Neutral at stop	1	\$ 508.00	\$ 508.00
14HRM	46,000 rear axle with driver controlled diff locks	1	\$ 3,931.00	\$ 3,931.00
14UMX	46,000 rear suspension	1	\$ 815.00	\$ 815.00
14WBV	Rear shocks	1	\$ 615.00	\$ 615.00
16SNR	Power mirrors	1	\$ 467.00	\$ 467.00
27DUM	22.5x 12.25 front wheels	1	\$ 735.00	\$ 735.00
Safety	Safety kit	1	\$ 300.00	\$ 300.00
Strobes	4 corner strobe lights	1	\$ 1,500.00	\$ 1,500.00
AL1	Petersen Atlas loader and dump body	1	\$ 146,597.00	\$ 146,597.00
<b>NON Contract Options</b>				
Body	Body up-grades per county spec	1	\$ 3,990.00	\$ 3,990.00
<b>Total:</b>			<b>\$ 313,073.00</b>	<b>\$ 313,073.00</b>

Total Purchase Order Amount:

**\$ 313,073.00**

Cab Color:	WHITE
Body Color:	BLACK

\*\*included in base price

Prepared By:


2/20/2024



Chuck Calhoun  
Cumberland International Trucks LLC      2110 S Division AVE Orlando FL 32805  
Office - 407.295.9777 / fax - 407.295.9727 / email - ccalhoun@cltte.com

**Prepared For:**  
CITY OF OCALA  
John King  
P O BOX 1270  
OCALA, FL 34478-1270  
(352)351 - 6762  
Reference ID: Grapple

**Presented By:**  
CUMBERLAND INTERNATIONAL TRUCKS, FL  
Tracy Lamonte  
5221 WEST HIGHWAY 40  
OCALA FL 34482 -  
(352)732-8151

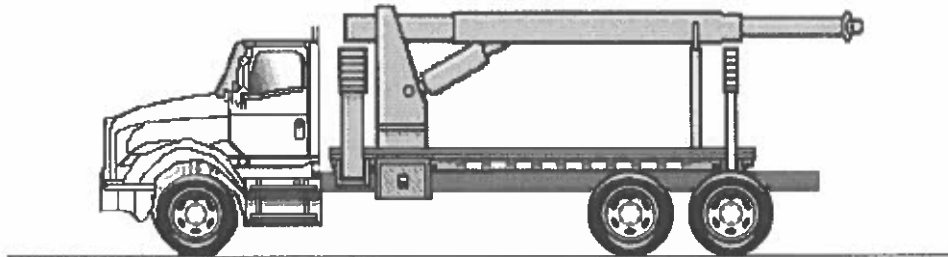

**Model Profile**  
**2025 HX620 SBA (HX620)**

<b>AXLE CONFIG:</b>	6X4
<b>APPLICATION:</b>	Lumber/Gypsum Crane
<b>MISSION:</b>	Requested GVWR: 66000. Calc. GVWR: 66000. Calc. GCWR: 140000 Calc. Start / Grade Ability: 22.56% / 2.45% @ 55 MPH Calc. Geared Speed: 82.6 MPH
<b>DIMENSION:</b>	Wheelbase: 262.00, CA: 193.00, Axle to Frame: 75.00
<b>ENGINE, DIESEL:</b>	{Cummins X15 450V} Productivity Series, EPA 2024, 450HP @ 1900 RPM, 1650 lb-ft Torque @ 900 RPM, 2000 RPM Governed Speed, 461 Peak HP (Max)
<b>TRANSMISSION, AUTOMATIC:</b>	{Allison 4000 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway
<b>CLUTCH:</b>	Omit Item (Clutch & Control)
<b>AXLE, FRONT NON-DRIVING:</b>	{Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
<b>AXLE, REAR, TANDEM:</b>	{Meritor RT-46-160} Single Reduction, 46,000-lb Capacity, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends Gear Ratio: 4.56
<b>CAB:</b>	Conventional, Day Cab
<b>TIRE, FRONT:</b>	(2) 425/65R22.5 Load Range L HAC 3 (CONTINENTAL), 465 rev/mile, 68 MPH, All-Position
<b>TIRE, REAR:</b>	(8) 11R22.5 Load Range G DH37 (HANKOOK), 498 rev/mile, 75 MPH, Drive
<b>SUSPENSION, REAR, TANDEM:</b>	{Hendrickson HMX EX 460} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with Transverse Torque Rods, Rubber End Bushings
<b>FRAME REINFORCEMENT:</b>	Full Outer C-Channel, Heat Treated Alloy Steel (120,000 PSI Yield), 10.813" x 3.892" x 0.312" (274.6mm x 98.8mm x 7.9mm), 480.0" (12192mm) OAL
<b>PAINT:</b>	Cab schematic 100LZ Location 1: 9219, Winter White (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
HX62000	Base Chassis, Model HX620 SBA with 262.00 Wheelbase, 193.00 CA, and 75.00 Axle to Frame.	9444/6697	16141
1652	CROSSMEMBER, REAR Relocated to End of Frame	7/58	65
1AMS	CROSSMEMBER, FRAME TIE for Heavy Duty	52/4	56
1AND	AXLE CONFIGURATION {Navistar} 6x4	0/0	0
	<u>Notes</u> : Pricing may change if axle configuration is changed.		
1CBU	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm); 480.0" (12192) Maximum OAL	65/132	197
1GBP	FRAME REINFORCEMENT Full Outer C-Channel, Heat Treated Alloy Steel (120,000 PSI Yield), 10.813" x 3.892" x 0.312" (274.6mm x 98.8mm x 7.9mm), 480.0" (12192mm) OAL	388/688	1076
1LEH	LICENSE PLATE HOLDER Single Plate, Swing Type, Mounted Below Front Bumper	1/0	1
1LTE	BUMPER, FRONT Contoured, Aluminum, Stainless Steel Clad, Heavy Duty	-58/8	-50
1SAP	CROSSMEMBER, REAR, AF (1) 5-Piece	-15/80	65
1VBC	TOW PIN, FRONT Heavy Duty; 150,000-lb. Total Capacity	88/-14	74
1WXM	WHEELBASE RANGE 238" (605cm) Through and Including 295" (750cm)	250/-250	0
2ARY	AXLE, FRONT NON-DRIVING {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity	126/0	126
3AGA	SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 20,000-lb Capacity, with Shock Absorbers	-26/0	-26
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	0/0	0
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SPRING BRAKE MODULATOR VALVE SR-7 with relay valve for 6x4/8x6		
4AZJ	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System, with Automatic Traction Control	0/0	0
4EDM	AIR DRYER {Bendix AD-HF} with Heater, Includes Pressure Protection Circuits, Safety Valve, Integral Purge Tank, Governor Pressure Settings 110 psi Cut-In/130 psi Cut-Out, Integrated PuraGuard Coalescing Filtration	0/0	0
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 SqIn Spring Brake	0/14	14
4EXV	BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn	4/0	4
4GBM	BRAKE, PARKING Manual Push-Pull Pneumatic Parking Brake	1/0	1
4LAA	SLACK ADJUSTERS, FRONT {Haldex} Automatic	14/0	14
4LGA	SLACK ADJUSTERS, REAR {Haldex} Automatic	0/32	32
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM	0/0	0

**INTERNATIONAL®**

**Vehicle Specifications  
2025 HX620 SBA (HX620)**

February 19, 2024

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
4VKC	AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab	0/0	0
4WDW	BRAKE CHAMBERS, POSITION on Rear/Rear Axle Located Inside Rear Tire Envelope (Meets Asphalt Spreader/Paver Clearance Requirements)	0/0	0
4WXZ	DRAIN VALVE {Bendix DV-2} (2) Automatic, with Heater, for Air Tank	1/0	1
4WZJ	AIR TANK LOCATION (2) : One Mounted Under Each Rail, Front of Rear Suspension, Parallel to Rail	0/0	0
4XDR	BRAKES, REAR {Meritor 16.5X7 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 7", 23,000-lb Capacity per Axle	0/104	104
4XDT	BRAKES, FRONT {Meritor 16.5X6 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 6", 23,000-lb Capacity	33/0	33
4XEE	PARK BRAKE CHAMBERS, ADDITIONAL (2) Spring Brake Type	0/30	30
5710	STEERING COLUMN Tilting and Telescoping	0/0	0
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black	0/0	0
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power	106/-10	96
6DGX	DRIVELINE SYSTEM {Dana Spicer} Service Free SPL250 Main Driveline with SPL170 Interaxle Shaft, for 6x4	2/5	7
7BES	AFTERTREATMENT COVER Polished Aluminum	9/2	11
7BLY	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Cab Mounted Right Side	0/0	0
7SAP	ENGINE COMPRESSION BRAKE {Cummins} Interbrake For Cummins Signature/ ISX/X15 Engines; Furnished with Engine	0/0	0
7WBA	TAIL PIPE (1) Turnback Type, Bright	-11/-2	-13
7WBS	MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel	22/9	31
7WBU	EXHAUST HEIGHT 11' 6"	4/0	4
7WZY	SWITCH, FOR EXHAUST 2 Position, Lighted & Latching, On/Off Type, Mounted in IP, Inhibits Diesel Particulate Filter Regeneration as Long as Switch is in On Position	2/0	2
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment	0/0	0
	<u>Includes</u>		
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel		
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever		
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light		
	: STARTER SWITCH Electric, Key Operated		
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector		
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever		
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted		
8653	HORN, AIR Single, Located Under Cab	0/0	0
8GHU	ALTERNATOR {Delco Remy 28SI} Brush Type, 12 Volt, 200 Amp Capacity, Pad Mount, with Remote Sense	4/0	4

**INTERNATIONAL®****Vehicle Specifications  
2025 HX620 SBA (HX620)**

February 19, 2024

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
8HAE	BODY BUILDER WIRING Rear of Frame; Includes Sealed Connectors for Tail/ Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn	3/0	3
8MSG	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud	0/0	0
8RBZ	SPEAKER, AUXILIARY, CB RADIO with Jack for CB; Mounted Left Side Above Driver's Door	0/0	0
8RLZ	BATTERY DISCONNECT SWITCH {Cole-Hersee 75920-06} 300 Amp, Disconnects Cab Power, Does Not Disconnect Charging Circuits, Locks with Padlock, Battery Box Mounted	2/0	2
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors	0/0	0
8RNB	CB RADIO Accommodation Package, Header Mounted, Feeds from Accessory Side of Ignition Switch, Includes Power Source, One Antenna and Antenna Base with Wiring on Left Side Mirror	0/0	0
8RPR	ANTENNA for Increased Roof Clearance Applications	1/0	1
8RPS	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/Auxiliary Input	3/0	3
8TPR	STOP, TURN, TAIL & B/U LIGHTS {Weldon} Multi-Function LED Lamp, Mounted Outside Rails, Includes LED License Plate Light	0/5	5
8VAY	HORN, ELECTRIC Disc Style	0/0	0
8VUK	BATTERY BOX Aluminum, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Right Side Back of Cab	0/0	0
8WBW	JUMP START STUD Remote Mounted	2/0	2
8WCK	POWER SOURCE, TERMINAL TYPE 2-Post	0/0	0
8WDG	BACK-UP ALARM {Preco 1059} Electronic; Solid State, Dual Function, 112 dBA	0/1	1
8WEZ	TURN SIGNAL SWITCH Self-Canceling	0/0	0
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn On if Windshield Wipers are Turned On	0/0	0
8WXB	HEADLIGHT WARNING BUZZER Sounds When Head Light Switch is on and Ignition Switch is in "Off" Position	0/0	0
8WXG	STARTING MOTOR {Mitsubishi Electric Automotive America 105P} 12-Volt, with Soft-Start	0/0	0
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses	0/0	0
8XJH	FOG LIGHTS (2) Clear Lens, LED, Rectangular, with White Light Source	3/0	3
8XLW	LIGHT, WORK LED, Pedestal Mounted, Back of Cab, with Switch on Instrument Panel	0/0	0
8XNY	HEADLIGHTS Halogen	0/0	0
9585	FENDER EXTENSIONS Rubber	18/0	18
9AAB	LOGOS EXTERIOR Model Badges	0/0	0
9AAE	LOGOS EXTERIOR, ENGINE Badges	0/0	0
9ASE	FRONT END Tilting, Composite	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
9HCN	GRILLE Chrome Vertical Accent Bars, with Black Mesh	0/0	0
9WAC	BUG SCREEN Mounted Behind Grille	5/0	5
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100	0/0	0
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
10AGB	COMMUNICATIONS MODULE Telematics Device with Over the Air Programming; Includes Five Year Data Plan and International 360	0/0	0
10SLV	PROMOTIONAL PACKAGE Government Silver Package	0/0	0
10WCY	SAFETY TRIANGLES	5/1	6
11001	CLUTCH Omit Item (Clutch & Control)	-130/-14	-144
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection	0/0	0
12864	BLOCK HEATER, ENGINE (Phillips) 120V/1500W	2/0	2
	<u>Includes</u> : BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door		
12EWW	ENGINE, DIESEL (Cummins X15 450V) Productivity Series, EPA 2024, 450HP @ 1900 RPM, 1650 lb-ft Torque @ 900 RPM, 2000 RPM Governed Speed, 461 Peak HP (Max)	648/29	677
12THT	FAN DRIVE (Horton Drivemaster) Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed	0/0	0
	<u>Includes</u> : FAN Nylon		
12VCB	AIR CLEANER Dual Element, with Pre-Cleaner, Engine Mounted	0/0	0
12VJT	EMISSION, CALENDAR YEAR (Cummins X15) EPA, OBD and GHG Certified for Calendar Year 2024	0/0	0
12WBR	FAN OVERRIDE Manual; with Electric Switch on Instrument Panel, (Fan On with Switch On)	2/0	2
12WCX	HOSE CLAMPS, RADIATOR HOSES (Gates) Shrink Band Type	0/0	0
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted	0/0	0
12WVG	EPA IDLE COMPLIANCE Low NOx Idle Engine, Complies with EPA Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood	0/0	0
12WYZ	RADIATOR DRAIN & FILL FITTING SPECIAL; To Vacuum Out or Fill the Cooling System from the Bottom of Radiator, for Use with Quick-Connect Radiator Drain Tool or Shop Coolant Evacuation-Fill System	0/0	0
12WZE	CARB IDLE COMPLIANCE Does Not Comply with California Clean Air Idle Regulations	0/0	0
12XBC	RADIATOR Aluminum, Welded, Down Flow, Front to Back System, 1325 Sqli, with 806 Sqli Charge Air Cooler	0/0	0
	<u>Includes</u> : RADIATOR HOSES Premium, Rubber		

**INTERNATIONAL®**

**Vehicle Specifications  
2025 HX620 SBA (HX620)**

**February 19, 2024**

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
12XCS	CARB EMISSION WARR COMPLIANCE Does Not Comply with CARB Emission Warranty	0/0	0
13BDY	TRANSMISSION, AUTOMATIC {Allison 4000 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway	196/52	248
13WCU	OIL COOLER, TRANSMISSION {Modine} Remote Mounted; Not for use with Retarder, for Automatic Transmission	41/-5	36
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission	1/0	1
13WLM	TRANSMISSION OIL Synthetic; 63 thru 76 Pints	0/0	0
13WUA	AUTOMATIC NEUTRAL Allison Transmission Shifts to Neutral When Parking Brake is Engaged and Remains in Neutral When Parking Brake is Disengaged, with On/Off Switch	0/0	0
13WUS	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS) and Regional Haul Series (RHS), General Purpose Trucks, Package Number 223, Modified for Single Input Auto Neutral	0/0	0
13WVV	NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released	0/0	0
13WYU	SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, Performance Programming	0/0	0
13XAA	PTO CONTROL, DASH MOUNTED For Customer Provided PTO; Includes Switch, Electric/Air Solenoid, Piping and Wiring	5/0	5
14862	PDL WARNING BUZZER Power Divider Lock	0/0	0
14HRM	AXLE, REAR, TANDEM {Meritor RT-46-160} Single Reduction, 46,000-lb Capacity, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends . Gear Ratio: 4.56	0/425	425
14UMX	SUSPENSION, REAR, TANDEM {Hendrickson HMX EX 460} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with Transverse Torque Rods, Rubber End Bushings	0/37	37
14WBN	DIFF. SWITCH CONTROLS Two Independent Switches for Control Traction Differentials on Tandem Rear Axles, Mounted on Dash	1/0	1
14WBV	SHOCK ABSORBERS, REAR (4) for Hendrickson HMX Suspension Only, Mounted from Frame to Beam	0/31	31
14WCR	TRANSVERSE TORQUE RODS {Hendrickson} TRAAX Rod, Transverse Only	0/-8	-8
14WMK	AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 65 thru 89.99 Pints	0/0	0
15BAA	DEF TANK COVER Stainless Steel	3/0	3
15LNA	FUEL HEATER (Cummins) Plumbing for Thermal Recirculation Valve (TRV) Mounted to Cummins X15 Engines, Thermostatically Controlled	0/0	0
15LPU	FUEL/WATER SEPARATOR {Racor 6600} Pre-Filter and Filter Base, Includes Water-in-Fuel Sensor	-3/0	-3
15SWE	FUEL TANK Top Draw, Non-Polished Aluminum, 26" Dia, 70 US Gal (265L), Mounted Left Side, Under Cab	-4/6	2



**INTERNATIONAL®**

Vehicle Specifications  
2025 HX620 SBA (HX620)

February 19, 2024

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
15WEY	DEF TANK 10.8 US Gal (41L) Capacity, Frame Mounted Outside Left Rail, Under Cab	19/2	21
16030	CAB Conventional, Day Cab  <u>Includes</u> : CAB REAR SUSPENSION Air : CLEARANCE/MARKER LIGHTS (5) LED Roof Mounted : COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window : CONSOLE, CENTER Includes Two Cup Holders and One Additional Storage Area : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger : COURTESY LIGHT (2) Driver and Passenger Door Mounted : DOME LIGHT, CAB Rectangular, Door and Instrument Panel Mounted Switch Activated, Timed Theater Dimming, Center Mounted, Integral to Console : FLOOR COVERING Rubber, Black : GLASS, ALL WINDOWS Tinted : GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side : GRAB HANDLE, CAB INTERIOR (4) "B" Pillar and Door Mounted, Two Each Side : READING LIGHT, CAB Located in Overhead Console : STORAGE POCKET, DOOR (2) Full Length, Driver and Passenger Door	0/0	0
16BAM	AIR CONDITIONER with Integral Heater and Defroster  <u>Includes</u> : HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps	0/0	0
16GEG	GAUGE CLUSTER Premium Level; English with English Electronic Speedometer  <u>Includes</u> : GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/ Refill for : GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure : WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure (Primary and Secondary)	0/0	0
16GHU	GRAB HANDLE, CAB INTERIOR (2) Safety Yellow	0/0	0
16HGL	GAUGE, OIL TEMP, REAR AXLE	1/0	1
16HGN	GAUGE, AIR APPLICATION	1/0	1
16HKB	GAUGE, MANIFOLD PRESSURE Data Link Driven; Mounted in Instrument Panel, Includes Controller Module	0/0	0
16HKC	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} Under Hood Cleaner Mounted with Internal Switch, with Text Message in Cluster	0/0	0
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0
16LUM	SEAT, PASSENGER {National} Non Suspension, High Back with Integral Headrest, Vinyl, with Fixed Back, with Under Seat Storage	32/8	40
16LWK	SEAT, DRIVER {ISRI} Series 300, Air Suspension, High Back, Vinyl, Single Chamber Lumbar, Inboard Armrest, Suspension Cover, Fore/Aft Isolator, Cushion Extension, Seat Tilt	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
16SDC	GRAB HANDLE, EXTERIOR (2) Chrome, Towel Bar Type, with Anti-Slip Rubber Inserts, for Cab Entry Mounted Left and Right Side at B-Pillar	6/0	6
16SNR	MIRRORS (2) C-Loop, Power Adjust, Heated, LED Clearance Lights, Bright Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width	5/0	5
	<u>Notes</u> : Mirror Dimensions are Rounded to the Nearest 0.5"		
16SNX	MIRROR, CONVEX, LOOK DOWN Right Side, Bright, 6" x 10.5"	3/0	3
16SNY	MIRROR, CONVEX, HOOD MOUNTED (2) Right and Left Sides, Bright, 7.5" x 7"	11/-1	10
16UZJ	STORAGE, REAR WALL Storage Pocket, Located on Back Wall Between Driver and Passenger Seats	3/0	3
16VKK	CAB INTERIOR TRIM Diamond, for Day Cab	0/0	0
16VVA	MONITOR, TIRE PRESSURE System Gives Warning that Tire Pressure is Below Set Pressure, Monitors Tire Pressure of Each Tire with Temperature Compensation, Data Displayed in the LCD of the Cluster, for 6x2, 6x4 and 6x6 Axle Configurations, Does Not Include Lift Axles or Spare Wheels	0/0	0
16WHJ	HOSE CLAMPS, HEATER HOSE (Breeze) Belleville Washer Type	0/0	0
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature	0/0	0
16XCM	CAB DOOR LOCKS Power, Driver Side Only; Non-Locking When Door Open	0/0	0
16XJP	INSTRUMENT PANEL Wing Panel	0/0	0
16XRX	MODESTY PANEL Painted	0/0	0
16XTM	ACCESS, CAB Aluminum, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab or Sleeper Cab	0/0	0
27DHK	WHEELS, FRONT DISC; 22.5x12.25 Rims, Non-Polished Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	0/0	0
28DUK	WHEELS, REAR {Accuride 29169} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and Steel Hubs	0/88	88
7372135810	(8) TIRE, REAR 11R22.5 Load Range G DH37 (HANKOOK), 498 rev/mile, 75 MPH, Drive	0/-16	-16
7752665441	(2) TIRE, FRONT 425/65R22.5 Load Range L HAC 3 (CONTINENTAL), 465 rev/mile, 68 MPH, All-Position	112/0	112
	Cab schematic 100LZ Location 1: 9219, Winter White (Std) Chassis schematic N/A		
	<b>Services Section:</b>		
40132	WARRANTY Standard for HX520, HX620, Effective with Vehicles Built January 1, 2021 or Later, CTS-2015B	0/0	0
	<b>Total Component Weight:</b>	<b>11510/8228</b> (lbs)	<b>19738</b> (lbs)

**INTERNATIONAL®**

**Vehicle Specifications  
2025 HX620 SBA (HX620)**

**February 19, 2024**

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
1	Petersen Atlas AL1 loader with 2240 XDX body with hard ox floor and sides per county spec.	0/0	0
	<b>Total Body Allied:</b>	<b>0/0</b> (lbs)	<b>0</b> (lbs)
	Pac	0/0	0
	FSA Fees	0/0	0
	<b>Total Goods Purchased:</b>	<b>0/0</b>	<b>0</b>

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.

**Petersen Industries, Inc.**  
 4000 SR 60 W  
 Lake Wales, FL 33859  
 Phone: (800) 930-5623  
 email: parts-service@petersenind.com



**Quote**  
 Quote No 20240380  
 Quote Date 2/19/2024  
 Page 1

**Bill To**  
 MAUDLIN INTERNATIONAL  
 DBA CUMBERLAND  
 2110 SOUTH DIVISION AVE.  
 ORLANDO, FL 32805  
 US

**Ship to**  
 MAUDLIN INTERNATIONAL  
 DBA CUMBERLAND  
 2110 SOUTH DIVISION  
 ORLANDO, FL 32805  
 US

END USER: Ocala, City of (FL)

**Customer No** 1390  
**Slspsn** Bryce Otwell  
**Payment terms** Net 30

**Loc** LW  
**PPD/COL**  
**Ship via** Best Way  
**Ship Date**  
 A.S.A.P.  
**Delivery Date:** 90-120 days after chassis

**Qty Ordered**      **UOM**   **Item No**      **Unit price**   **Disc**      **Extended price**

1.00 EA LOADER  
 AS CONFIGURED BELOW  
 Additional options include :  
 Mount round amber strobes on each  
 side of front bumper  
 Grotee Strobe 77353  
 Grote Bracket 43572  
 Grote Grommet 91740  
 Grote Pigtail 67013  
 Option 12.24 Megotough Hose Upgrade

**Feature/Kit Components- LOADER**

- 1.00 EA 0.AL1  
MODEL AL1 BASE LOADER
- 1.00 EA 03.12 ATLAS PED  
ATLAS PEDESTAL
- 1.00 EA 03.12 STD HT PED  
STANDARD HEIGHT PEDESTAL
- 1.00 EA 01.11MQCA-AL1  
QUADSTICK MECH CONTROLS  
OPTION FOR AL LOADER
- 1.00 EA 01.24  
GRATING HEAT SHIELD (FOR DUAL  
CONTROLS ONLY)
- 1.00 EA 10.16 HDHI  
HDHI OUTRIGGER STROBE
- 1.00 EA 07.14 C&D BUCKET  
C&D BUCKET 2 CYLINDER
- 1.00 EA 10.04 BUWL  
BOOM-UP WARNING LIGHT/AUDIBLE  
ALARM
- 1.00 EA 12.05 HG  
HOSE GUARDS- HEAD & VALVE BANK
- 1.00 EA 12.36 HD  
HD CONTROL BOX  
THROTTLE ENGINE KILL & HORN
- 1.00 EA 8.41 TB TFM  
TOOL BOX, TRUCK FRAME MOUNTED  
UNDER BODY (ADD-ON)
- 1.00 EA 12.08 RK  
TRIANGLE FLARE KIT
- 1.00 EA 10.99 SA-901  
BACK-UP ALARM SA-901
- 1.00 EA 13.00 AO  
ADD'L OPTIONS AS DEFINED BELOW
- 1.00 EA 12.06 SLB  
FIRE EXTINGUISHER 5LB
- 1.00 EA 11.02 LBPIO  
LOADER SINGLE COLOR PI ORANGE

Petersen Industries, Inc.  
 4000 SR 60 W  
 Lake Wales, FL 33859  
 Phone: (800) 930-5623  
 email: parts-service@petersenind.com



**Quote**  
**Quote No** 20240380  
**Quote Date** 2/19/2024  
**Page** 2

**Bill To**  
 MAUDLIN INTERNATIONAL  
 DBA CUMBERLAND  
 2110 SOUTH DIVISION AVE.  
 ORLANDO, FL 32805  
 US

**Ship to**  
 MAUDLIN INTERNATIONAL  
 DBA CUMBERLAND  
 2110 SOUTH DIVISION  
 ORLANDO, FL 32805  
 US

END USER: Ocala, City of (FL)

<b>Customer No</b> 1390	<b>Slspsn</b> Bryce Otwell	<b>Payment terms</b> Net 30	
<b>Loc</b> LW	<b>PPD/COL</b>	<b>Ship via</b> Best Way	<b>Ship Date</b> A.S.A.P.
<b>Qty Ordered</b>	<b>UOM</b>	<b>Item No</b>	<b>Delivery Date:</b> 90-120 days after chassis <b>Unit price</b> <b>Disc</b> <b>Extended price</b>

1.00 EA 8.0 DUMP BODY  
 AS CONFIGURED BELOW

**Feature/Kit Components- 8.0 DUMP BODY**

- 1.00 EA 8.22 2240-XDX  
MODEL 2240-XDX BODY  
3/16" HARDOX FLOOR AND SIDES
- 1.00 EA 8.38 EGPTLCD  
ELECTRIC GOAL POST TYPE LOAD  
COVERING DEVICE
- 1.00 EA 8.72 OPRD  
SINGLE PIECE REAR DOOR  
(REPLACES STND BARN DOORS)
- 1.00 EA 8.47 WL-BW  
WIRE LOOM FOR BODY WIRING
- 1.00 EA 10.09 LED  
LED TYPE BODY LIGHTS, 15 EA
- 1.00 EA 10.11 SLS  
PETERSON SMART LIGHT SYSTEM
- 1.00 EA 8.76 RCMTL  
REAR CAMERA MOUNTED IN REAR  
MARKER LIGHT-TV-550
- 1.00 EA 8.77ANSI  
ANSI Z245 PACKAGE
- 1.00 EA 8.74 STHB  
SEE-THRU HEADBOARD FOR BODY
- 1.00 EA 11.02B  
BODY COLOR: BLACK

Tracy L/ 352-427-7032

Signature

Date

THE QUOTE TOTAL MAY NOT REFLECT MISCELLANEOUS CHARGES, FREIGHT OR SALES TAX