

OCALA ELECTRIC UTILITY
OCALA, FLORIDA

FIRST REVISED SHEET NO. 19.0
CANCELS ORIGINAL SHEET NO. 19.0

**APPLICATION FOR INTERCONNECTION OF
CUSTOMER-OWNED RENEWABLE
GENERATION SYSTEMS**

TIER 1 - Ten (10) kW or Less

TIER 2 - Greater than 10 kW and Less Than or Equal to 100 kW

TIER 3 - Greater than 100 kW and Less Than or Equal to Two (2) MW

Note: These customer-owned renewable generation system size limits may be subject to a cumulative enrollment limit on net-metering customers located in the area served by the City of Ocala Electric Utility. Please refer to the Ocala Electric Utility Net-Metering Rate Schedule.

Ocala Electric Utility customers who install customer-owned renewable generation systems (RGS) and desire to interconnect those facilities with the Ocala Electric Utility system are required to complete this application. When the completed application and fees are returned to Ocala Electric Utility, the process of completing the appropriate Tier 1, Tier 2 or Tier 3 Interconnection Agreement can begin. This application and copies of the Interconnection Agreements may be obtained at Ocala Electric Utility, located at 201 SE 3rd Street, Ocala, Florida 34471, or may be requested by email from OEU@ocalafl.org.

1. Customer Information

Name: Ryan Pfouts

Mailing Address: 1435 NE 24th Street

City: Ocala State: FL Zip Code: 34470

Phone Number: 229-560-3372 Alternate Phone Number: _____

Email Address: RDPFOUTS@GMAIL.COM Fax Number: _____

Ocala Electric Utility Customer Account Number: 522165-237051

2. RGS Facility Information

Facility Location: 1435 NE 24th Street Ocala, Fl. 34470

Ocala Electric Utility Customer Account Number: 522165-237051

RGS Manufacturer: Hanwha Solar America, LLC

Manufacturer's Address: 2424 Walsh Avenue
Santa Clara, CA. 95051

Reference or Model Number: X Q-CELLS Q.TRON BLK M-G2+AC430(24-Modules)

Serial Number: Battery-FRANKLIN APOWER-2 10kW (15kWh)

(Continued on Sheet No.19.1)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

Ocala Electric Utility
Ocala, Florida
(Continue from Sheet No. 19.0)

FIRST REVISED SHEET NO. 19.1
CANCELS ORIGINAL SHEET NO. 19.1

3. Facility Rating Information

Gross Power Rating: 8.77kWac ("Gross power rating" means the total manufacturer's AC nameplate generating capacity of an on-site customer-owned renewable generation system that will be interconnected to and operate in parallel with Ocala Electric Utility's distribution facilities. For inverter-based systems, the AC nameplate generating capacity shall be calculated by multiplying the total installed DC nameplate generating capacity by 0.85 in order to account for losses during the conversion from DC to AC.)

Fuel or Energy Source: Solar PV

Anticipated In- Service Date: 6/30/25

4. Application Fee

The application fee is based on the Gross Power Rating and must be submitted with this application. The non-refundable application fee is \$375 for Tier 2 and \$750 for Tier 3 installations. There is no application fee for Tier 1 installations.

5. Interconnection Study Fee

For Tier 3 installations, a deposit in the amount of the estimated costs of the study (to be determined at time of application) must be paid along with this application in addition to the application fee referenced in Article 4 above. This deposit will be applied toward the cost of an interconnection study. The customer will be responsible for the actual costs of the study. Should the actual cost of the study be less than the deposit, the difference will be refunded to the customer. Customer agrees to comply with all interconnection requirements identified in the interconnection study report.

6. Required Documentation

Prior to completion of the Interconnection Agreement, the following information must be provided to the Ocala Electric Utility by the customer.

- A. Documentation demonstrating that the installation complies with (or most current version at time of inspection approval):
1. IEEE 1547 (2018) Standard for Interconnecting Distributed Resources with Electric Power Systems.
 2. IEEE 1547.1 (2005) Standard Conformance Test Procedures for Equipment Interconnecting Distributed Resources with Electric Power Systems.
 3. UL 1741 (2010) Inverters, Converters, Controllers and Interconnection System Equipment for Use with Distributed Energy Resources.

(Continued on Sheet No. 19.2)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

CONTRACT# ELE/250966

OCALA ELECTRIC UTILITY
OCALA, FLORIDA
(Continued from Sheet No. 19.1)

FIRST REVISED SHEET NO. 19.2
CANCELS ORIGINAL SHEET NO. 19.2

B. Documentation that the customer-owned renewable generation has been inspected and approved by local code officials prior to its operation in parallel with the Ocala Electric Utility system to ensure compliance with applicable local codes. OEU will also require proof of commission testing by a qualified 3rd party testing company (not affiliated in any way with the manufacturer, vendor or installation contractor), for compliance with all required and applicable codes, standards, and interconnection study requirements, prior to setting of OEU metering equipment.

C. Proof of insurance in the amount of:

Tier 1 - \$100,000.00

Tier 2 - \$1,000,000.00


Tier 3 - \$2,000,000.00

Customer

By: Ryan Pfouts

(Print Name)

Date: 5/14/25

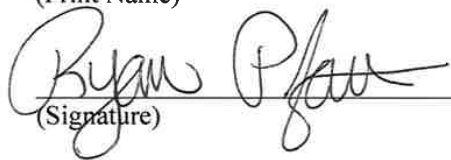
(Signature)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

OCALA ELECTRIC UTILITY
OCALA, FLORIDA

FIRST REVISED SHEET NO. 20.0
CANCELS ORIGINAL SHEET NO. 20.0

Tri-Party Net-Metering Power Purchase Agreement

This Tri-Party Net-Metering Power Purchase Agreement (this “Agreement”) is entered into this 14th day of May, 2025, by and between the Florida Municipal Power Agency, a governmental joint action agency created and existing under the laws of the State of Florida (hereinafter “FMPA”), the City of Ocala doing business as Ocala Electric Utility, a body politic (hereinafter “OEU”), and Ryan Pfouts, a retail electric customer of OEU (hereinafter “Customer”).

Section 1. Recitals

1.01. OEU and Customer have executed OEU’s Standard Interconnection Agreement for a Customer-Owned Renewable Generation System (RGS) pursuant to which OEU has agreed to permit interconnection of Customer’s renewable generation to OEU’s electric system at Customer’s presently-metered location, and Customer has agreed to deliver excess electric energy generated by Customer’s Renewable Generation System to OEU’s electric distribution system;

1.02. The City of Ocala and FMPA have entered into the All-Requirements Power Supply Contract, dated as of May 1, 1986, (hereinafter the “ARP Contract”) pursuant to which the City of Ocala has agreed to purchase and receive, and FMPA has agreed to sell and supply OEU with all energy and capacity necessary to operate the OEU electric system, which limits OEU’s ability to directly purchase excess energy from customer-owned renewable generation.

1.03. In order to promote the development of small customer-owned renewable generation by permitting OEU to allow its customers to interconnect with OEU’s electric system and to allow OEU’s electric customers to offset their electric consumption with customer-owned renewable generation, FMPA, in accordance with the terms and conditions of this agreement, has agreed to purchase excess customer-owned generation from OEU’s electric customers interconnected to OEU’s electric system.

NOW THEREFORE, for and in consideration of the mutual covenants and agreements set forth herein, the Parties covenant and agree as follows:

Section 2. Interconnection

2.01. Customer shall not begin parallel operations with the OEU electric distribution system until Customer has executed OEU’s electric Standard Interconnection Agreement for Small Customer-Owned Renewable Generation and is in compliance with all terms and conditions

OEU requires that the customer install and operate the RGS in accordance with all applicable safety codes and standards. OEU shall establish and enforce terms and conditions of operation and disconnection of all interconnected customer-owned renewable generation as it relates to the effect of the RGS on OEU’s electric distribution system.

(Continued on Sheet No. 20.1)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

OCALA ELECTRIC UTILITY
OCALA, FLORIDA
(Continued from Sheet No. 20.0)

FIRST REVISED SHEET NO. 20.1
CANCELS ORIGINAL SHEET NO. 20.1

Section 3. Metering

3.01 In accordance with the OEU's Standard Interconnection Agreement for Customer-Owned Renewable Generation, OEU shall install metering equipment at the point of delivery capable of recording two separate kWh meter readings: (1) the flow of electricity from OEU to the Customer (Delivered), and (2) the flow of excess electricity from the Customer to OEU. OEU shall take meter readings on the same cycle as the otherwise applicable rate schedule.

Section 4. Purchase of Excess Customer-Owned Renewable Generation

4.01. Customer-owned renewable generation shall be first used for Customer's own load and shall offset Customer's demand for OEU's electricity. All electric power and energy delivered by OEU to Customer shall be received and paid for by Customer to OEU (Received) pursuant to the terms, conditions and rates of the OEU otherwise applicable rate schedule.

4.02. Excess customer-owned renewable generation shall be delivered to the OEU Electric distribution system. For purposes of this Agreement, the term "excess customer-owned renewable generation" means any kWh of electrical energy produced by the customer-owned renewable generation system that is not consumed by Customer and is delivered to the OEU electric distribution system. FMPA agrees to purchase and receive, and Customer agrees to sell and deliver, all excess customer-owned renewable generation at the energy rate established by FMPA, which shall be calculated in accordance with Schedule A. Excess customer-owned renewable generation shall be purchased in the form of a credit on Customer's monthly energy consumption bill from OEU.

4.03. In the event that a given monthly credit for excess customer-owned renewable generation exceeds the total billed amount for Customer's consumption in any corresponding month, then the excess credit shall be applied to the subsequent month's bill. Excess energy credits produced pursuant to the preceding sentence shall accumulate and be used to offset Customer's energy consumption bill for a period of not more than twelve (12) months. At the end of each calendar year, any unused excess energy credits shall be paid by OEU to the Customer in accordance with the OEU Electric Net-Metering Service Rate Schedule.

(Continued on Sheet No. 20.2)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

OCALA ELECTRIC UTILITY
OCALA, FLORIDA
(Continued from Sheet No. 20.1)

FIRST REVISED SHEET NO. 20.2
CANCELS ORIGINAL SHEET NO. 20.2

4.04. FMPA and OEU shall not be required to purchase or receive excess customer-owned renewable generation, and may require Customer to interrupt or reduce production of customer-owned renewable generation, (a) when necessary in order to construct, install, maintain, repair, replace, remove, investigate, or inspect any OEU equipment or part of OEU's system; or (b) if either FMPA or OEU determine, in their sole judgment, that curtailment, interruption, or reduction is necessary because of emergencies, forced outages, force majeure, or compliance with any applicable electric code or standard.

4.05. Customer acknowledges that its provision of electricity to OEU hereunder is on a first-offered, first-accepted basis and subject to diminution and/or rejection in the event the total amount of electricity delivered to OEU pursuant to the Net-Metering Service Rate Schedule (as filed with the Florida Public Service Commission), from all participating OEU customers, exceeds two and one-half percent (2.5%) of the aggregate customer peak demand on the OEU electric system.

Section 5. Renewable Energy Credits

5.01. Customer shall offer FMPA a first right of refusal before selling or granting to any third party the right to the Green Attributes associated with its customer-owned renewable generation that is interconnected to OEU electric distribution system. The term "Green Attributes" shall include any and all credits, certificates, benefits, environmental attributes, emissions reductions, offsets, and allowances, however entitled, attributable to the generation of electricity from the customer-owned-renewable generation and its displacement of conventional energy generation.

5.02. Any additional meter(s) installed to measure total renewable electricity generated by the Customer for the purposes of measuring Green Attributes, including and renewable energy certificates (or similarly titled credits for renewable energy generated), shall be installed at the expense of the Customer, unless determined otherwise during negotiations for the sale of the Customer's credits to FMPA.

Section 6. Term and Termination

6.01. This Agreement shall become effective upon execution by all Parties, and shall remain in effect thereafter on a month-to-month basis until terminated by any Party upon thirty (30) days written notice to all other Parties.

6.02. This Agreement shall terminate immediately and without notice upon: (a) termination of the electric distribution service by OEU or (b) failure by Customer to comply with any of the terms and conditions of this Agreement or OEU's Standard Interconnection Agreement for Customer-Owned Renewable Generation.

(Continued on Sheet No. 20.3)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

OCALA ELECTRIC UTILITY
OCALA, FLORIDA
(Continued from Sheet No. 20.2)

FIRST REVISED SHEET NO. 20.3
CANCELS ORIGINAL SHEET NO. 20.3

Section 7. Miscellaneous Provisions

7.01. Assignment. It is understood and agreed that no party may transfer, sell, mortgage, pledge, hypothecate, convey, designate, or otherwise assign this Agreement, or any interest herein or any rights or obligations hereunder, in whole or in part, either voluntarily or by operation of law, (including, without limitation, by merger, consolidation, or otherwise), without the express written consent of the other parties (and any such attempt shall be void), which consent shall not be unreasonably withheld. Subject to the foregoing, this Agreement shall inure to the benefit of and be binding upon the parties and their respective successors and permitted assigns.

7.02. Amendment. It is understood and agreed that FMPA and OEU reserve the right, on no less than an annual basis, to change any of the terms and conditions, including pricing, in this Agreement on sixty (60) days advance written notice. FMPA and OEU may make such changes on an immediate basis in the event any applicable law, rule, regulation or court order requires them. In such event, FMPA and OEU will give Customer as much notice as reasonably possible under the circumstances.

7.03. Indemnification. To the fullest extent permitted by laws and regulations, and in return for adequate, separate consideration, Customer shall defend, indemnify, and hold harmless FMPA and OEU, their officers, directors, agents, guests, invitees, and employees from and against all claims, damages, losses to persons or property, whether direct, indirect, or consequential (including but not limited to fees and charges of attorneys, and other professionals and court and arbitration costs) arising out of, resulting from, occasioned by, or otherwise caused by the operation or misoperation of the customer-owned renewable generation, or the acts or omissions of any other person or organization directly or indirectly employed by the Customer to install, furnish, repair, replace or maintain the customer-owned renewable generation system, or anyone for whose acts any of them may be liable.

7.04. Governing Law. The validity and interpretation of this Agreement and the rights and obligations of the parties shall be governed and construed in accordance with the laws of the State of Florida without regard for any conflicts of law provisions that might cause the law of other jurisdictions to apply. All controversies, claims, or disputes arising out of or related to this Agreement or any agreement, instrument, or document contemplated hereby, shall be brought exclusively in the County or Circuit Court for Marion County, Florida, or the United States District Court sitting in Marion County, Florida, as appropriate.

(Continued on Sheet No. 20.4)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

OCALA ELECTRIC UTILITY
OCALA, FLORIDA
(Continued from Sheet No. 20.3)

FIRST REVISED SHEET NO. 20.4
CANCELS ORIGINAL SHEET NO. 20.4

7.05. Enforcement of Agreement. In the event that either party is required to enforce this Agreement by court proceedings or otherwise, the prevailing party shall be entitled to recover all fees and costs incurred, including reasonable attorney's fees and costs for trial, alternative dispute resolution, and/or appellate proceedings.

7.06. Severability. To the extent any provision of this Agreement is prohibited by or invalid under applicable law, such provision shall be ineffective to the extent of such prohibition or invalidity, without invalidating the remainder of such provision or the remaining provisions of this Agreement.

7.07. Third Party Beneficiaries and Sovereign Immunity. This Agreement is solely for the benefit of FMPA, OEU, and Customer and no right nor shall any cause of action accrue upon or by reason, to or for the benefit of any third party not a formal party to this Agreement. Nothing in this Agreement, expressed or implied, is intended or shall be construed to confer upon any person or corporation other than FMPA, OEU, or Customer, any right, remedy, or claim under or by reason of this Agreement or any of the provisions or conditions of this Agreement; and, all provisions, representations, covenants, and conditions contained in this Agreement shall inure to the sole benefit of and be binding upon FMPA, OEU, and Customer and their respective representatives, successors, and assigns. Further, no term or condition contained in this Agreement shall be construed in any way as a waiver by either FMPA or OEU of the sovereign immunity applicable to either or both of them as established by Florida Statutes, 768.28.

(Continued on Sheet No. 20.5)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

CONTRACT# ELE/250966

Ocala Electric Utility
Ocala, Florida
(Continued from Sheet No. 20.4)

FIRST REVISED SHEET NO. 20.5
CANCELS ORIGINAL SHEET NO. 20.5

IN WITNESS WHEREOF, Customer and OEU have executed this Agreement the day and year first above written.


City of Ocala Electric Utility

By: 
Title: CFO
Date: 9/8/2025

Florida Municipal Power Agency

By: 
Title: Chief Sys Ops & Tech Officer
Date: 9/8/2025


Customer

By: Ryan Pfouts
(Print Name)

(Signature)

Date: 5/14/25

Customer's City of Ocala Electric Utility Account Number: 522165-237051

Approved as to form and legality:


William E. Sexton, Esq.
City Attorney

(Continued on Sheet No. 20.6)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

OCALA ELECTRIC UTILITY
OCALA, FLORIDA
(Continued from Sheet No. 20.5)

FIRST REVISED SHEET NO. 20.6
CANCELS ORIGINAL SHEET NO. 20.6

**Tri-Party Net-Metering Power Purchase Agreement
Schedule A**

I. All-Requirements Project Calculation of Excess Customer-Owned Renewable Generation Credit

- a) FMPPA shall pay OEU for the excess kWh energy delivered by customer-owned renewable generation to OEU's electric system. Every month, OEU shall determine the total kWh of customer-owned renewable generation that is delivered to OEU's electric system, and shall send the information to FMPPA as soon as it becomes available, but no later than the second working day of every month. FMPPA will then provide a monthly payment to OEU in the form of a credit on the ARP power bill for the excess energy delivered to the distribution grid. The ARP Renewable Generation Credit will be calculated as follows:

ARP Renewable Generation Credit = Quarterly Energy Rate * Monthly kWh of excess customer-owned renewable generation

Quarterly Energy Rate = 3 month average of ARP energy rate. FMPPA will update the Quarterly Energy Rate every April 1, July 1, October 1 and January 1.

- b) As part of the monthly bill adjustment, FMPPA will also increase OEU's kWh billing amount by the same kWh amount as the customer-owned renewable generation purchased by FMPPA. This adjustment is necessary because excess customer generation that flows onto OEU's electric system has been purchased by FMPPA, but will remain on OEU's electric system and be used by OEU to meet its other customers' electric needs. As a result, OEU's monthly ARP bill will be adjusted accordingly to reflect FMPPA's subsequent sale of this energy to OEU.

II. Payment for Unused Excess Energy Credits

- a) Monthly excess energy credits shall accumulate and be used to offset the Customer's following month energy consumption bill for a period of not more than twelve (12) months.
- b) At the end of each calendar year, OEU shall pay the Customer for any unused excess energy credits in accordance with the OEU Electric Net-Metering Service Rate Schedule.

OCALA ELECTRIC UTILITY
OCALA, FLORIDA

FIRST REVISED SHEET NO. 21.0
CANCELS ORIGINAL SHEET NO. 21.0

**Tier 1 – Standard Interconnection Agreement
Customer-Owned Renewable Generation System**

This **Agreement** is made and entered into this 14th day of May, 20 25, by and between Ryan Pfouts, (hereinafter called "**Customer**"), located at 1435 NE 24th Street in Ocala, Florida, and the City of Ocala doing business as Ocala Electric Utility (hereinafter called OEU), a body politic. Customer and OEU shall collectively be called the "**Parties**". The physical location/premise where the interconnection is taking place: 1435 NE 24th Street Ocala, Fl. 34470.

WITNESSETH

Whereas, a Tier 1 Renewable Generation System (RGS) is an electric generating system that uses one or more of the following fuels or energy sources: hydrogen, biomass, solar energy, geothermal energy, wind energy, ocean energy, waste heat, or hydroelectric power as defined in Section 377.803, Florida Statutes, rated at no more than ten (10) kilowatts (10 kW) alternating current (AC) power output and is primarily intended to offset part or all of the Customer's current electric requirements; and

Whereas, OEU operates an electric system serving the City of Ocala; and

Whereas, Customer has made a written Application to OEU, a copy being attached hereto, to interconnect its RGS with OEU's electrical supply grid at the location identified above; and

Whereas, the City of Ocala and the Florida Municipal Power Agency (hereinafter called "FMPPA") have entered into the All-Requirements Power Supply Contract pursuant to which the City of Ocala has agreed to purchase and receive, and FMPPA has agreed to sell and supply OEU with all energy and capacity necessary to operate the OEU electric system, which limits OEU's ability to directly purchase excess energy from customer-owned renewable generation; and

Whereas, in order to promote the development of small customer-owned renewable generation by permitting OEU to allow its customers to interconnect with OEU's electric system and to allow OEU customers to offset their electric consumption with customer-owned renewable generation, FMPPA, in accordance with the terms and conditions of this agreement, has agreed to purchase excess customer-owned generation from OEU customers interconnected to OEU's electric system; and

Whereas, the OEU desires to provide interconnection of a RGS under conditions which will insure the safety of OEU customers and employees, reliability and integrity of its distribution system;

NOW, THEREFORE, for and in consideration of the mutual covenants and agreements herein set forth, the parties hereto covenant and agree as follows:

(Continued on Sheet No. 21.1)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

OCALA ELECTRIC UTILITY
OCALA, FLORIDA
(Continued from Sheet No. 21.0)

FIRST REVISED SHEET NO. 21.1
CANCELS ORIGINAL SHEET NO. 21.1

1. The Customer shall be required to enter into a Tri-Party Net-Metering Purchase Power Agreement with FMPA and the City of Ocala Electric Utility (OEU).
2. "Gross power rating" (GPR) means the total manufacturer's AC nameplate generating capacity of an on-site customer-owned renewable generation system that will be interconnected to and operate in parallel with OEU's distribution facilities. For inverter-based systems, the GPR shall be calculated by multiplying the total installed DC nameplate generating capacity by 0.85 in order to account for losses during the conversion from DC to AC.
3. This agreement is strictly limited to cover a Tier 1 RGS as defined above. It is the Customer's responsibility to notify OEU of any change to the GPR of the RGS by submitting a new application for interconnection specifying the modifications at least 30 days prior to making the modifications. Increase in GPR above the ten kilowatt (10 kW) limit would necessitate entering into a new agreement at either Tier 2 or Tier 3 which may impose additional requirements on the Customer. In no case does the Tier 1, Tier 2 or Tier 3 agreement cover increases in GPR above two megawatts (2MW).
4. The RGS GPR must not exceed 90 percent (90%) of the Customer's OEU calculated distribution service rating at the Customer's location (including shared electric facilities). If the GPR does exceed the 90 percent (90%) limit, the Customer shall be responsible to pay the cost of upgrades to the distribution facilities required to accommodate the GPR capacity and ensure the 90 percent (90%) threshold is not breached. OEU will not allow a RGS GPR greater than required to offset the customer's annual kWh energy consumption (based on customer's historical consumption data or by means of estimated usage of similar type of service as determined by OEU).
5. The Customer shall not be required to pay any special fees due solely to the installation of the RGS.
6. The Customer shall fully comply with OEU's Design Standards following NEC standards as those documents may be amended or revised by OUS from time to time.
7. The Customer certifies that its installation, its operation and its maintenance shall be in compliance with the following standards (or most current version at time of inspection approval):
 - a. IEEE-1547 (2018) Standard for Interconnecting Distributed Resources with Electric Power System;
 - b. IEEE-1547.1 (2005) Standard Conformance Test Procedures for Equipment Interconnection Distributed Resources with Electric Power Systems;
 - c. UL-1741 (2010) Inverters, Converters, Controllers and Interconnection System Equipment for Use with Distributed *Energy Resources*.
 - d. The National Electric Code, state and/or local building codes, mechanical codes and/or electrical codes;
 - e. The manufacturer's installation, operation and maintenance instructions.

(Continued to Sheet No. 21.2)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

OCALA ELECTRIC UTILITY
OCALA, FLORIDA
(Continued from Sheet No. 21.1)

FIRST REVISED SHEET NO. 21.2
CANCELS ORIGINAL SHEET NO. 21.2

8. The Customer is not precluded from contracting for the lease, operation or maintenance of the RGS with a third party. Such lease may not provide terms or conditions that provide for any payments under the agreement to any way indicate or reflect the purchase of energy produced by the RGS. Customer shall not enter into any lease agreement that results in the retail purchase of electricity; or the retail sale of electricity from the customer-owned renewable generation. Notwithstanding this restriction, in the event that Customer is determined to have engaged in the retail purchase of electricity from a party other than OEU, then Customer shall be in breach of this Agreement and may be subject to the jurisdiction of the Florida Public Service Commission and to fines/penalties.

9. The Customer shall provide a copy of the manufacturer's installation, operation and maintenance instructions to OEU. If the RGS is leased to the Customer by a third party, or if the operation or maintenance of the RGS is to be performed by a third party, the lease and/or maintenance agreements and any pertinent documents related to these agreements shall be provided to OEU.

10. Prior to commencing parallel operation with OEU's electric system, Customer shall have the RGS inspected and approved by the appropriate code authorities having jurisdiction. Customer shall provide a copy of this inspection and approval to OEU.

11. The Customer agrees to permit OEU, if it should so choose, to inspect the RGS and its component equipment and the documents necessary to ensure compliance with this Agreement both before and after the RGS goes into service and to witness the initial testing of the RGS equipment and protective apparatus. OEU will provide Customer with as much notice as reasonably possible, either in writing, email, facsimile or by phone as to when OEU may conduct inspections and or document review. Upon reasonable notice, or at any time without notice in the event of an emergency or hazardous condition, Customer agrees to provide OEU access to the Customer's premises for any purpose in connection with the performance of the obligations required by this Agreement or, if necessary, to meet OEU's legal obligation to provide service to its customers. At least ten (10) business days prior to initially placing the customer-owned renewable generation system in service, Customer shall provide written notification to OEU advising of the date and time at which Customer intends to place the system in service, and OEU shall have the right to have personnel present on the in-service date in order to ensure compliance with the requirements of this Agreement.

(Continued on Sheet No. 21.3)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

OCALA ELECTRIC UTILITY
OCALA, FLORIDA
(Continued from Sheet No. 21.2)

FIRST REVISED SHEET NO. 21.3
CANCELS ORIGINAL SHEET NO. 21.3

12. The Customer's RGS must have an appropriately sized grid-tie inverter system that includes applicable protective systems. Customer certifies that the RGS equipment includes an OEU interactive inverter or interconnection system equipment that ceases to interconnect with the OEU system upon a loss of OEU's electric power. The inverter shall be considered certified for interconnected operation if it has been submitted by a manufacturer to a nationally recognized testing laboratory (NRTL) to comply with UL 1741. The NRTL shall be approved by the Occupational Safety & Health Administration (OSHA).

13. If Customer adds another RGS that (i) utilizes the same OEU interactive inverter for both systems, or (ii) utilizes a separate OEU interactive inverter for each system, Customer shall provide OEU with sixty (60) days advance written notice of the addition.

14. The Customer shall not energize the OEU system when OEU's system is deenergized. The Customer shall cease to energize the OEU system during a faulted condition on the OEU system and/or upon any notice from OEU that the deenergizing of Customer's RGS equipment is necessary. The Customer shall cease to energize the OEU system prior to automatic or non-automatic reclosing of OEU's protective devices. There shall be no intentional islanding, as described in IEEE 1547, between the Customer's and OEU's systems.

15. The Customer is responsible for the protection of its generation equipment, inverters, protection devices, and other system components from damage from the normal and abnormal operations that occur on OEU system in delivering and restoring system power. Customer agrees that any damage to any of its property, including, without limitation, all components and related accessories of its RGS system, due to the normal or abnormal operation of OEU system, is at Customer's sole risk and expense. Customer is also responsible for ensuring that the customer-owned renewable generation equipment is inspected, maintained, and tested regularly in accordance with the manufacturer's instructions to ensure that it is operating correctly and safely.

16. The Customer must install, at their expense, a manual disconnect switch of the visible load break type to provide a separation point between the AC power output of the customer-owned renewable generation system and any Customer wiring connected to OEU's system, such that back feed from the customer-owned renewable generation system to OEU's system cannot occur when the switch is in the open position. The manual disconnect switch shall be mounted separate from the meter socket on an exterior surface adjacent to the meter. The switch shall be readily accessible to OEU and capable of being locked in the open position with an OEU padlock. When locked and tagged in the open position by OEU, this switch will be under the control of OEU.

(Continued on Sheet No. 21.4)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

OCALA ELECTRIC UTILITY
OCALA, FLORIDA
(Continued from Sheet No. 21.3)

FIRST REVISED SHEET NO. 21.4
CANCELS ORIGINAL SHEET NO. 21.4

17. Subject to an approved inspection, including installation of acceptable disconnect switch, this Agreement shall be executed by OEU within thirty (30) calendar days of receipt of a completed application. Customer must execute this Agreement and return it to OEU at least thirty (30) calendar days prior to beginning parallel operations with OEU's electric system, subject to the requirements of Section 18, below, and within one (1) year after OEU executes this Agreement.

18. Once OEU has received Customer's written documentation that the requirements of this Agreement have been met, all agreements and documentation have been received and the correct operation of the manual switch has been demonstrated to an OEU representative, OEU will, within fifteen (15) business days, send written notice that parallel operation of the RGS may commence.

19. OEU requires the Customer to maintain general liability insurance for personal injury and property damage in the amount of not less than one hundred thousand dollars (\$100,000.00).

20. OEU will furnish, install, own and maintain metering equipment capable of measuring the flow of kilowatt-hours (kWh) of energy. The Customer's service associated with the RGS will be metered to measure the energy delivered by OEU to Customer, and measure the energy delivered by Customer to OEU. Customer agrees to provide safe and reasonable access to the premises for installation, maintenance and reading of the metering and related equipment. The Customer shall not be responsible for the cost of the installation and maintenance of the metering equipment necessary to measure the energy delivered by the Customer to OEU.

21. The Customer shall be solely responsible for all legal and financial obligations arising from the design, construction, installation, operation, maintenance and ownership of the RGS.

22. The Customer must obtain all permits, inspections and approvals required by applicable jurisdictions with respect to the generating system and must use a licensed, bonded and insured contractor to design and install the generating system. The Customer agrees to provide OEU with a copy of the local building code official inspection and certification of installation. The certification shall reflect that the local code official has inspected and certified that the installation was permitted, has been approved, and has met all electrical and mechanical qualifications.

(Continued on Sheet No. 21.5)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

OCALA ELECTRIC UTILITY
OCALA, FLORIDA
(Continued from Sheet No. 21.4)

FIRST REVISED SHEET NO. 21.5
CANCELS ORIGINAL SHEET NO. 21.5

23. In no event shall any statement, representation, or lack thereof, either express or implied, by OEU, relieve the Customer of exclusive responsibility for the Customer's system. Specifically, any OEU inspection of the RGS shall not be construed as confirming or endorsing the system design or its operating or maintenance procedures or as a warranty or guarantee as to the safety, reliability, or durability of the RGS. OEU's inspection, acceptance, or its failure to inspect shall not be deemed an endorsement of any RGS equipment or procedure. Further, as set forth in Sections 15 and 26 of this Agreement, Customer shall remain solely responsible for any and all losses, claims, damages and/or expenses related in any way to the operation or misoperation of its RGS equipment.

24. Notwithstanding any other provision of this Interconnection Agreement, OEU, at its sole and absolute discretion, may isolate the Customer's system from the distribution grid by whatever means necessary, without prior notice to the Customer. To the extent practical, however, prior notice shall be given. The system will be reconnected as soon as practical once the conditions causing the disconnection cease to exist. OEU shall have no obligation to compensate the Customer for any loss of energy during any and all periods when Customer's RGS is operating at reduced capacity or is disconnected from OEU's electrical distribution system pursuant to this Interconnection Agreement. Typical conditions which may require the disconnection of the Customer's system include, but are not limited to, the following:

- a. OEU system emergencies, forced outages, uncontrollable forces or compliance with prudent electric OEU practice.
- b. When necessary to investigate, inspect, construct, install, maintain, repair, replace or remove any OEU equipment, any part of OEU's electrical distribution system or Customer's generating system.
- c. Hazardous conditions existing on OEU's system due to the operation of the Customer's generation or protective equipment as determined by OEU.
- d. Adverse electrical affects (such as power quality problems) on the electrical equipment of OEU's other electric consumers caused by the Customer's generation as determined by OEU.
- e. When Customer is in breach of any of its obligations under this Interconnection Agreement or any other applicable policies and procedures of OEU.
- f. When the Customer fails to make any payments due to OEU by the due date thereof.

25. Upon termination of services pursuant to this Agreement, OEU shall open and padlock the manual disconnect switch and remove any additional metering equipment related to this Agreement. At the Customer's expense, within thirty (30) working days following the termination, the Customer shall permanently isolate the RGS and any associated equipment from OEU's electric supply system, notify OEU that the isolation is complete, and coordinate with OEU for return of OEU's lock.

(Continued to Sheet No. 21.6)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

OCALA ELECTRIC UTILITY
OCALA, FLORIDA
(Continued from Sheet No. 21.5)

FIRST REVISED SHEET NO. 21.6
CANCELS ORIGINAL SHEET NO. 21.6

26. To the fullest extent permitted by law, and in return for adequate, separate consideration, Customer shall indemnify, defend and hold harmless OEU, any and all of their members of its governing bodies, and its officers, agents, and employees for, from and against any and all claims, demands, suits, costs of defense, attorneys fees, witness fees of any type, losses, damages, expenses, and liabilities, whether direct, indirect or consequential, related to, arising from, or in any way connected with:

- a. Customer's design, construction, installation, inspection, maintenance, testing or operation of Customer's generating system or equipment used in connection with this Interconnection Agreement, irrespective of any fault on the part of OEU.
- b. The interconnection of Customer's generating system with, and delivery of energy from the generating system to, OEU's electrical distribution system, irrespective of any fault on the part of OEU.
- c. The performance or nonperformance of Customer's obligations under this Interconnection Agreement or the obligations of any and all of the members of Customer's governing bodies and its officers, agents, contractors (and any subcontractor or material supplier thereof) and employees.

Customer's obligations under this Section shall survive the termination of this Interconnection Agreement.

27. Customer shall not have the right to assign its benefits or obligations under this Agreement without OEU's prior written consent and such consent shall not be unreasonably withheld. If there is a change in ownership of the RGS, Customer shall provide written notice to OEU at least thirty (30) days prior to the change in ownership. The new owner will be required to assume, in writing, the Customer's rights and duties under this Agreement, or execute a new Standard Interconnection Agreement. The new owner shall not be permitted to net meter or begin parallel operations until the new owner assumes this Agreement or executes a new Agreement.

28. This Agreement supersedes all previous agreements and representations either written or verbal heretofore made between OEU and Customer with respect to matters herein contained. This Agreement, when duly executed, constitutes the only Agreement between parties hereto relative to the matters herein described. This Agreement shall continue in effect from year to year until either party gives sixty (60) days' notice of its intent to terminate this Agreement.

(Continued on Sheet No. 21.7)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

OCALA ELECTRIC UTILITY
OCALA, FLORIDA
(Continued from Sheet No. 21.6)

FIRST REVISED SHEET NO. 21.7
CANCELS ORIGINAL SHEET NO. 21.7

29. This Agreement shall be governed by and construed and enforced in accordance with the laws, rules and regulations of the State of Florida and OEU's tariff as it may be modified, changed, or amended from time to time, including any amendments modification or changes to OEU's Net-Metering Service Rate Schedule, the schedule applicable to this Agreement. The Customer and OEU agree that any action, suit, or proceeding arising out of or relating to this Interconnection Agreement shall be initiated and prosecuted in the state court of competent jurisdiction located in Marion County, Florida, and OEU and the Customer irrevocably submit to the jurisdiction and venue of such court. To the fullest extent permitted by law, each Party hereby irrevocably waives any and all rights to a trial by jury and covenants and agrees that it will not request a trial by jury with respect to any legal proceeding arising out of or relating to this Interconnection Agreement.

None of the provisions of this Interconnection Agreement shall be considered waived by either Party except when such waiver is given in writing. No waiver by either Party of any one or more defaults in the performance of the provisions of this Interconnection Agreement shall operate or be construed as a waiver of any other existing or future default or defaults. If any one or more of the provisions of this Interconnection Agreement or the applicability of any provision to a specific situation is held invalid or unenforceable, the provision shall be modified to the minimum extent necessary to make it or its application valid and enforceable, and the validity and enforceability of all other provisions of this Interconnection Agreement and all other applications of such provisions shall not be affected by any such invalidity or unenforceability. This Interconnection Agreement does not govern the terms and conditions for the delivery of power and energy to non-generating retail customers of OEU's electrical distribution system.

30. This Agreement incorporates by reference the terms of the tariff filed with the Florida Public Service Commission by OEU, including OEU's Net-Metering Service Rate Schedule, and associated technical terms and abbreviations, general rules and regulations and standard electric service requirements (as may be applicable) are incorporated by reference, as amended from time to time. To the extent of any conflict between this Agreement and such tariff, the tariff shall control.

31. OEU and Customer recognize that the Florida Statutes and/or the Florida Public Service Commission Rules, including those directly addressing the subject of this Agreement, may be amended from time to time. In the event that such statutes and/or rules are amended that affect the terms and conditions of this Agreement, OEU and Customer agree to supersede and replace this Agreement with a new Interconnection Agreement, which complies with the amended statutes/rules.

(Continued on Sheet No. 21.8)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

OCALA ELECTRIC UTILITY
OCALA, FLORIDA
(Continued from Sheet No. 21.7)

FIRST REVISED SHEET NO. 21.8
CANCELS ORIGINAL SHEET NO. 21.8

32. Customer acknowledges that its provision of electricity to OEU hereunder is on a first-offered, first-accepted basis and subject to diminution and/or rejection in the event the total amount of electricity delivered to OEU pursuant to the OEU's Net-Metering Service Rate Schedule, (as filed with the Florida Public Service Commission), from all participating OEU customers, exceeds two and one-half percent (2.5%) of the aggregate customer peak demand on the OEU system.

33. This Agreement is solely for the benefit of OEU and Customer and no right nor any cause of action shall accrue upon or by reason, to or for the benefit of any third party not a formal party to this Agreement. Nothing in this Agreement, expressed or implied, is intended or shall be construed to confer upon any person or corporation other than OEU or Customer, any right, remedy, or claim under or by reason of this Agreement or any of the provisions or conditions of this Agreement; and, all provisions, representations, covenants, and conditions contained in this Agreement shall inure to the sole benefit of and be binding upon OEU and Customer and their respective representatives, successors, and assigns. Further, no term or condition contained in this Agreement shall be construed in any way as a waiver by OEU of the sovereign immunity applicable to OEU as established by Florida Statutes, 768.28.

(Continued on Sheet No. 21.9)

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019

CONTRACT# ELE/250966

OCALA ELECTRIC UTILITY
OCALA, FLORIDA
(Continued from Sheet No. 21.8)

FIRST REVISED SHEET NO. 21.9
CANCELS ORIGINAL SHEET NO. 21.9

IN WITNESS WHEREOF, Customer and OEU have executed this Agreement the day and year first above written.

City of Ocala Electric Utility:

Customer:

By: Signed by:
Janice Mitchell
55198D43858A4E1...

By: Ryan Pfouts
(Print Name)

Title: CFO

Ryan Pfouts
(Signature)

Date: 9/8/2025

Date: 5/14/25

City of Ocala Electric Utility Account Number:

522165-237051

Approved as to form and legality:

Signed by:
William E. Sexton, Esq.
435528382E204F3
William E. Sexton, Esq.
City Attorney

Issued by: Michael Poucher, P.E.
Electric Utility Director

Effective: October 1, 2019



P.O. Box 95241
Chicago, IL 60694-5241

Producer Name
Kin Insurance Network
Distributor (KIND)

Policy Number
KIN-HO-FL-253134907

CONTRACT# ELE/250966
Policy Period
12/10/2024 to 12/10/2025

Homeowners Policy Declarations

Policy underwritten by Kin Interinsurance Network

Your Declarations Page shows at a glance the coverage you have and your premium. Please read your policy carefully, including your Declarations Page and any attached Endorsements, for a complete description of your coverage.

AGENCY INFO		
AGENCY NAME Kin Insurance Network Distributor (KIND)	AGENCY NUMBER 1	AGENCY EMAIL support@kin.com
ADDRESS 222 Merchandise Mart Plaza Suite 228 Chicago IL 60654	PHONE (855) 717-0022	
For Payments, please use this address: KIN INTERINSURANCE NETWORK P.O. Box 95241 Chicago, IL 60694-5241		
NAMED INSURED		SECOND NAMED INSURED
NAME Ryan Pfouts		
PHONE (229) 560-3372		
EMAIL rdpfouts@gmail.com		
POLICY PERIOD		PROPERTY ADDRESS
START DATE 12/10/2024	END DATE 12/10/2025	1435 NE 24th St Ocala, FL 34470-4420
12:01 AM Standard Time at the residence premises		
This policy applies only to accidents, "occurrences", or losses which happen during the policy period shown above, unless otherwise noted in the policy. If the policy is written on a continuous basis, each period of one year ending on the anniversary date of this policy constitutes a separate policy period.		
DATE ISSUED 11/30/2021		MAILING ADDRESS

kin.
P.O. Box 95241
Chicago, IL 60694-5241

Producer Name
Kin Insurance Network
Distributor (KIND)

Policy Number
KIN-HO-FL-253134907

CONTRACT# ELE/250966
Policy Period
12/10/2024 to 12/10/2025

REPORT A CLAIM

Email	claims@kin.com
Website	kin.com/claims
Phone Number	(866) 204-2219

PROPERTY COVERAGES

Section I Coverages	Limit of Liability
A. Dwelling	\$244,000
B. Other Structure	\$4,880
C. Personal Property	\$97,600
D. Loss of Use	\$24,400

LIABILITY COVERAGES




Section II Coverages	Limit of Liability
E. Personal Liability	\$100,000
F. Medical Payments	\$1,000

DEDUCTIBLES

All Other Perils	\$1,000
Calendar Year Hurricane Deductible	\$2,440 (1% of Coverage A)

This policy contains a separate deductible for hurricane losses, and a separate deductible for all other perils, insured against. The deductibles shown in your policy declaration page(s) are the deductibles that will apply as described in your policy, in the event of a covered loss. Other deductibles may be available. Please contact your insurance agent for additional information.

Directory of Pages	
PV-1	Project Summary
PV-2	Site Plan
PV-3	Electrical Plan
PV-4	PV Safety Labels
PV-5.1-3	Attachment Plans
PV-6	Attachment Details
PV-7	Fire Safety Plan
Appendix	Equipment Datasheets
	Mounting System Engineering Letter
	UL 2703 Class A Fire Certification
	UL 2703 Grounding and Bonding Certification
Project Details	
Property Owner	Ryan Pfouts
Property Address	1435 NE 24th St, Ocala, FL 34470
APN	24499-000-00
Zoning	Residential
Use and Occupancy Classification	One- or Two-Family Dwelling Group (Group R3)
AHJ	City of Ocala
Utility Company	City of Ocala
Electrical Code	2020 NEC (NFPA 70)
Fire Code	2023 FFPC
Other Building Codes	2023 FL Building Code 2023 FL Residential Code
Contractor Information	
Company	Affordable Solar, Roof & Air
Address	4914 Creekside Dr, Clearwater, FL 33760
Phone Number	(800) 515-1254
Contractor Signature	

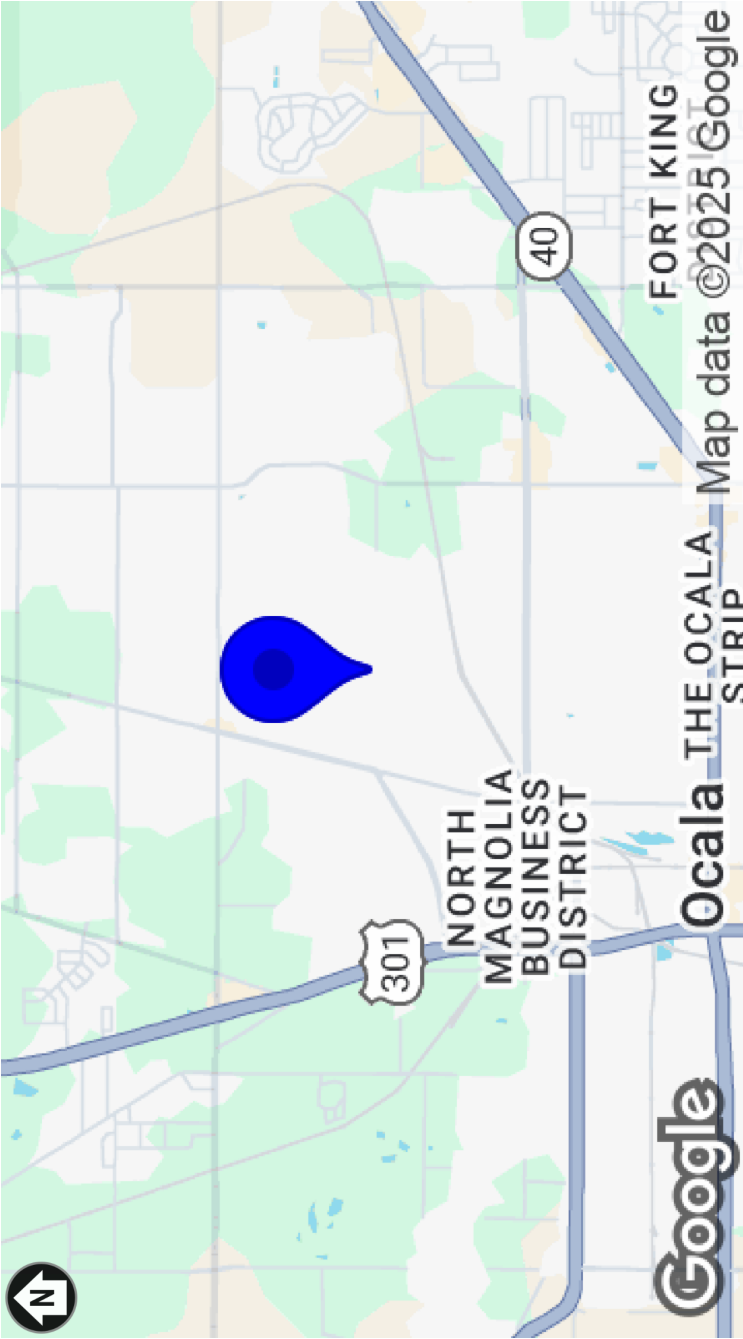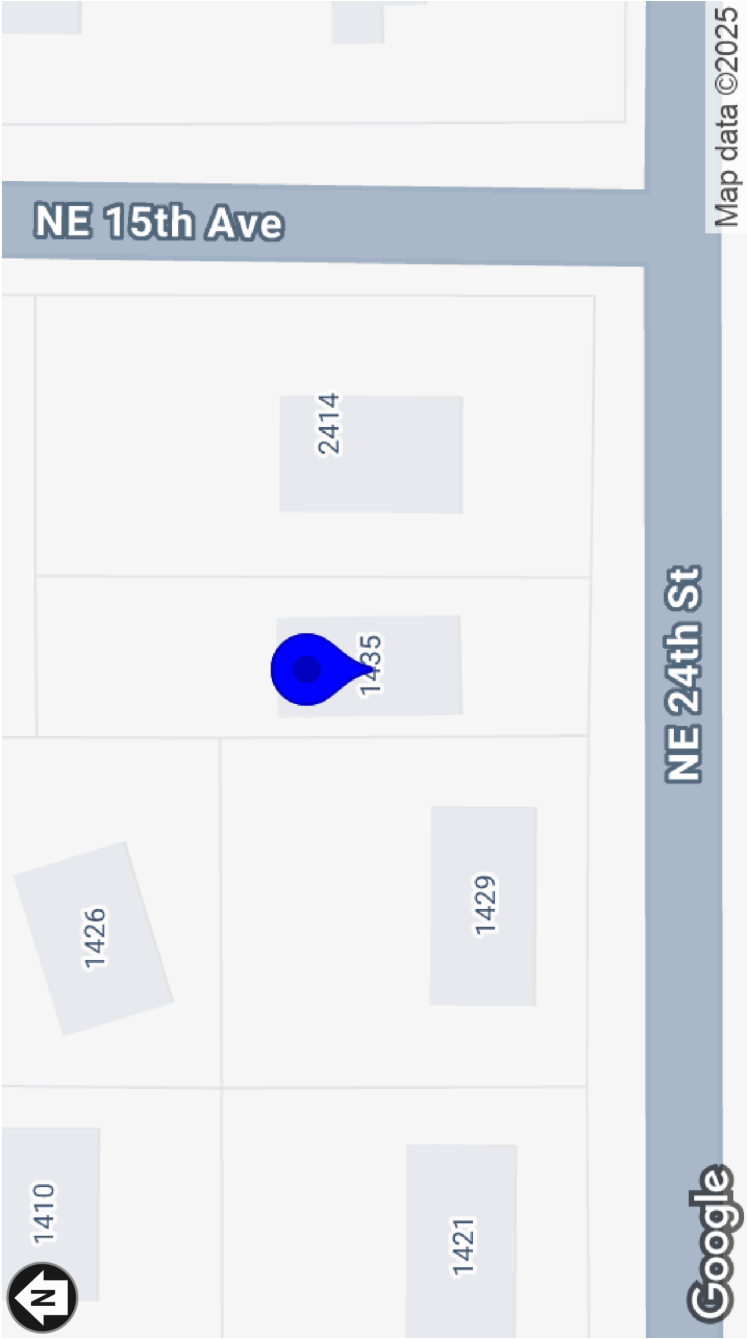

THIS DOCUMENT HAS BEEN PREPARED TO DESCRIBE THE DESIGN OF A PROPOSED PV SYSTEM WITH ENOUGH DETAIL TO DEMONSTRATE COMPLIANCE WITH APPLICABLE CODES AND REGULATIONS. THE DOCUMENT SHALL NOT BE RELIED UPON AS A SUBSTITUTE FOR FOLLOWING MANUFACTURER INSTALLATION INSTRUCTIONS. THE SYSTEM SHALL COMPLY WITH ALL MANUFACTURERS INSTALLATION INSTRUCTIONS, AS WELL AS ALL APPLICABLE CODES. NOTHING IN THIS DOCUMENT SHALL BE INTERPRETED IN A WAY THAT OVERRIDES THEM. CONTRACTOR IS RESPONSIBLE FOR VERIFICATION OF ALL DETAILS IN THIS DOCUMENT.

P-1E3030	
GRID-TIED PV SYSTEM	PFOUTS RESIDENCE 1435 NE 24TH ST OCALA, FL 34470
PROJECT SUMMARY	
DOC ID: 52318D-3	
DATE: 5/13/25	
CREATOR: S.S.	
REVIEWER:	
REVISIONS	
PV-1	

GRID-TIED PV SYSTEM

PFOUTS RESIDENCE
1435 NE 24TH ST
OCALA, FL 34470

P-1E3030

SINGLE-LINE DIAGRAM

PROJECT ID: 52318D-4

DATE: 7/11/25

CREATED BY: S.S.

REVIEWER:

REVISIONS

PV-3

GENERAL ELECTRICAL NOTES	
1	UTILITY HAS 24-HR UNRESTRICTED ACCESS TO ALL PHOTOVOLTAIC SYSTEM COMPONENTS LOCATED AT THE SERVICE ENTRANCE.
	CONDUCTORS EXPOSED TO SUNLIGHT SHALL BE LISTED AS SUNLIGHT RESISTANT PER NEC ARTICLE 300.6 (C) (1) AND ARTICLE 310.10 (D).
3	CONDUCTORS EXPOSED TO WET LOCATIONS SHALL BE SUITABLE FOR USE IN WET LOCATIONS PER NEC ARTICLE 310.10 (C).

GROUNDING NOTES	
1	ALL EQUIPMENT SHALL BE PROPERLY GROUNDED PER THE REQUIREMENTS OF NEC ARTICLES 250 & 690
2	PV MODULES SHALL BE GROUNDED USING MODULE LUGS OR RACKING INTEGRATED GROUNDING CLAMPS AS ALLOWED BY LOCAL JURISDICTION. ALL OTHER EXPOSED METAL PARTS SHALL BE GROUNDED USING UL-LISTED LAY-IN LUGS.
3	INSTALLER SHALL CONFIRM THAT MOUNTING SYSTEM HAS BEEN EVALUATED FOR COMPLIANCE WITH UL 2703 "GROUNDING AND BONDING" WHEN USED WITH PROPOSED PV MODULE.
4	IF THE EXISTING MAIN SERVICE PANEL DOES NOT HAVE A VERIFIABLE GROUNDING ELECTRODE, IT IS THE CONTRACTOR'S RESPONSIBILITY TO INSTALL A SUPPLEMENTAL GROUNDING ELECTRODE.
5	AC SYSTEM GROUNDING ELECTRODE CONDUCTOR (GEC) SHALL BE A MINIMUM SIZE #8AWG WHEN INSULATED, #6AWG IF BARE WIRE.
6	UNPROTECTED, BARE EQUIPMENT GROUNDING CONDUCTORS SHALL BE SIZED ACCORDING TO NEC ARTICLE 690.45, AND BE A MINIMUM OF #10AWG WHEN NOT EXPOSED TO DAMAGE, AND #6AWG SHALL BE USED WHEN EXPOSED TO DAMAGE
7	GROUNDING AND BONDING CONDUCTORS, IF INSULATED, SHALL BE COLOR CODED GREEN, OR MARKED GREEN IF #4AWG OR LARGER

1

SINGLE-LINE DIAGRAM

PV-3

SCALE: NTS

MODULES									
REF.	QTY.	MAKE AND MODEL	PMAX	PTC	ISC	IMP	VOC	VMP	TEMP. COEFF. OF VOC
PM1-24	24	Q-CELLS Q.TRON BLK II G2-AC-430	430W	404W	13.74A	13.05A	39.3V	32.9V	-0.0539V/°C (-0.24%/°C)
								FUSE RATING	25A

ENERGY STORAGE SYSTEMS				
REF. QTY.	MAKE AND MODEL	CHEMISTRY	CONTINUOUS POWER	CONTINUOUS CURRENT
ESS1 1	FRANKLIN APOWER-2	LI-ION	10,000W	41.6A

DISCONNECTS		
REF. QTY.	MAKE AND MODEL	RATED CURRENT
SW1 1	SQUARE D D224NRB OR EQUIV.	200A

PASS-THRU BOXES AND COMBINERS			
REF. QTY.	MAKE AND MODEL	RATED CURRENT	MAX RATED VOLTAGE
CB3-5	20A		240VAC
CB6	50A 10KAIC		240VAC
CB1	60A 10KAIC		240VAC / 600VDC
CB2	150A		240VAC
F1-2	150A		240VAC

SYSTEM SUMMARY

	BRANCH 1	BRANCH 2	BRANCH 3
INVERTERS PER BRANCH	8	8	8
MAX AC CURRENT	10.80A	10.80A	10.80A
MAX AC OUTPUT POWER	2,600W	2,600W	2,600W
ARRAY STC POWER		10,320W	
ARRAY PTC POWER		9,691W	
MAX AC CURRENT		32A	
MAX AC OUTPUT POWER		7,800W	
DERATED (GEC) AC POWER		7,800W	

1

RAPID SHUTDOWN DEVICES COMPLIANT WITH REQUIREMENTS AS PER NEC 690.12(B)(2). PV CIRCUIT CONDUCTORS LOCATED OUTSIDE THE ARRAY BOUNDARY (DEFINED AS 3 FEET FROM THE POINT OF PENETRATION INTO A BUILDING OR MORE THAN 3 FEET FROM AN ARRAY) SHALL BE LIMITED TO NOT MORE THAN 30V WITHIN 30 SECONDS OF RAPID SHUTDOWN INITIATION. CONDUCTORS LOCATED INSIDE OF THE ARRAY BOUNDARY SHALL BE LIMITED TO NOT MORE THAN 80 VOLTS WITHIN 30 SECONDS OF SHUTDOWN.

2

SYSTEM MEETS REQUIREMENTS FOR PV HAZARD CONTROL SYSTEM, AS PER NEC 690.12(B)(2).

3

ALL METAL ENCLOSURES, RACEWAYS, CABLES AND EXPOSED NONCURRENT-CARRYING METAL PARTS OF EQUIPMENT SHALL BE GROUNDED TO EARTH AS REQUIRED BY NEC 250.4(B) AND PART III OF ARTICLE 250 AND DC EQUIPMENT GROUNDING CONDUCTORS SHALL BE SIZED ACCORDING TO NEC 690.45. THE GROUNDING ELECTRODE SYSTEM SHALL ADHERE TO NEC 680.47(A) AND NEC 250.169 AND INSTALLED IN COMPLIANCE WITH NEC 250.64.

4

MAX DC VOLTAGE OF PV MODULE IS EXPECTED TO BE 42.1V AT -5°C (-5.3°C - 25°C) X 0.094V/C + 39.3V = 42.1V.

5

AC AGGREGATION PANEL BUSBAR AND THE OVERCURRENT PROTECTION PROTECTING THE BUSBAR SHALL BE SIZED IN ACCORDANCE WITH NEC 705.12(B)(3)(3).

6

THE IQ COMBINER CONTAINS A FACTORY-INSTALLED COMMUNICATIONS GATEWAY WITH AN OCPD RATED NO MORE THAN 15A.

7

BREAKERS IN IQ COMBINER SHALL BE SECURED WITH HOLD-DOWN KITS IN ACCORDANCE WITH NEC 408.36(D)

8

POINT-OF-CONNECTION IS ON SUPPLY SIDE OF SERVICE DISCONNECT. IN COMPLIANCE WITH NEC 705.12(B)(3)(1).

9

ALL DER BREAKERS IN THE BACKUP GATEWAY SHALL BE SECURED WITH HOLD-DOWN BRACKETS IN ACCORDANCE WITH NEC 408.36(D)

10

UTILITY DISCONNECT SHALL BE A VISIBLE KNIFE-BLADE TYPE DISCONNECT THAT IS ACCESSIBLE AND LOCKABLE BY THE UTILITY IN ACCORDANCE WITH NEC 680.13(E). THE DISCONNECT SHALL BE LOCATED WITHIN 10 FT OF UTILITY METER AND INSTALLED IN COMPLIANCE WITH NEC 705.20 AND GROUPED AS REQUIRED BY NEC 230.72.

11

UTILITY DISCONNECT MEETS NEC 690.12(C) REQUIREMENT FOR A RAPID SHUTDOWN INITIATION DEVICE

12


PV BACKFEED OCPDS SHALL HAVE AN AMPERE INTERRUPTING CAPACITY THAT COMPLIES WITH THE REQUIREMENTS OF NEC 110.9 AND NEC 240.86(B)

13

HOLD-DOWN KIT SHALL BE INSTALLED FOR BACKFEED BREAKER IN ACCORDANCE WITH NEC 408.36(D) (EXCEPTION IN NEC 705.12(E) DOES NOT APPLY TO BACKUP SYSTEMS)

CONDUCTOR AND CONDUIT SCHEDULE W/ELECTRICAL CALCULATIONS									
ID	TYP	CONDUCTOR	CONDUIT / CABLE	CURRENT-CARRYING CONDUCTORS IN CONDUIT/CABLE	OCPD	EGC	TEMP. CORR. FACTOR	FILL FACTOR	CONT. CURRENT
1	3	12 AWG THHN/THWN-2 IN ENPHASE Q CABLE, COPPER	CABLE	2	20A	6 AWG BARE, COPPER	0.96 (34°C)	1.0	10.8A
2	3	10 AWG THWN-2, COPPER	0.75" DIA. LFMC	6	20A	10 AWG THWN-2, COPPER	0.76 (54°C)	0.8	10.8A
3	1	6 AWG THWN-2, COPPER	0.75" DIA. PVC-40	2	50A	6 AWG THWN-2, COPPER	0.96 (34°C)	1.0	32.4A (DERS) 0.02A (LOADS)
4	1	8 AWG THWN-2, COPPER	0.5" DIA. PVC-40	2	60A	8 AWG THWN-2, COPPER	0.96 (34°C)	1.0	24A
5	1	10 AWG THWN-2, COPPER	1.5" DIA. PVC-40	3	150A	6 AWG THWN-2, COPPER	0.96 (34°C)	1.0	56.4A (DERS) 120A (LOADS)
6	1	10 AWG THWN-2, COPPER	1.5" DIA. PVC-40	3	150A	6 AWG THWN-2, COPPER	0.96 (34°C)	1.0	120A
7	1	10 AWG THWN-2, COPPER	1.5" DIA. PVC-40	3	150A	6 AWG THWN-2, COPPER	0.96 (34°C)	1.0	56.4A (DERS) 120A (LOADS)

MAX. CURRENT (125%)	BASE AMP.	DERATED AMP.	TERM. TEMP. RATING	LEN.	V.D.
13.5A	30A	29A	90 °C	157.5FT	0.93%
13.5A	40A	24.32A	75 °C	35FT	0.13%
40.5A (DERS) 0.02A (LOADS)	75A	72A	75 °C	54IN	0.06%
24A	55A	53A	75 °C	48IN	0.06%
150A	170A	163.2A	75 °C	48IN	0.06%
150A	170A	163.2A	75 °C	48IN	0.06%
150A	170A	163.2A	75 °C	48IN	0.06%

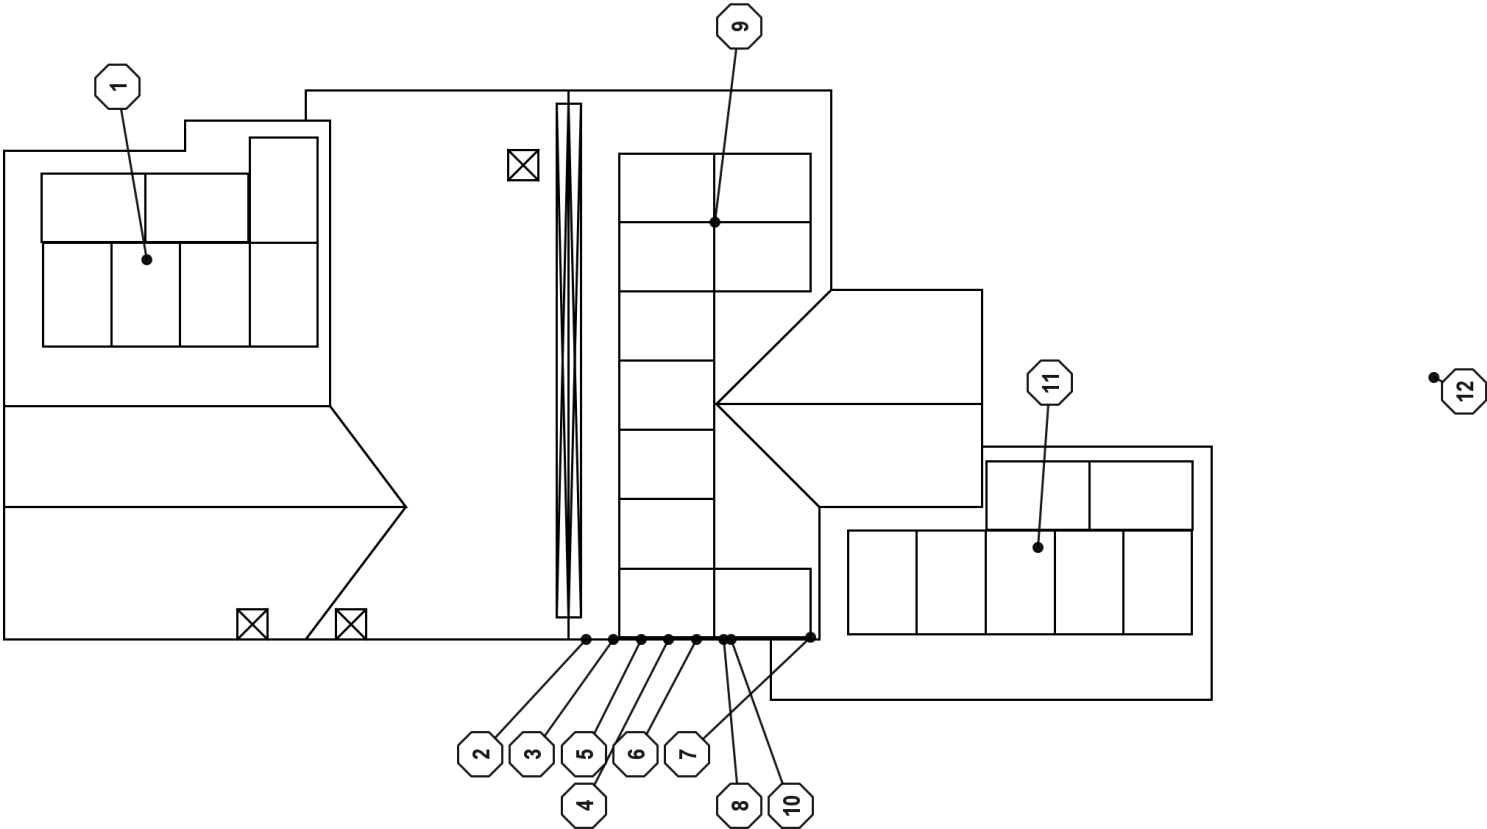

1 SITE PLAN
PV-2
SCALE: 1" = 10'

GENERAL NOTES	
1	EQUIPMENT LIKELY TO BE WORKED UPON WHILE ENERGIZED SHALL BE INSTALLED IN LOCATIONS THAT SATISFY MIN. WORKING CLEARANCES PER NEC 110.26.
2	24/7 UNESCORTED KEYLESS ACCESS SHALL BE PROVIDED TO ALL CITY OF OCALA EQUIPMENT.
3	CONTRACTOR SHALL USE ONLY COMPONENTS LISTED BY A NATIONALLY RECOGNIZED TESTING LABORATORY FOR THE INTENDED USE.
4	CONTRACTOR IS RESPONSIBLE FOR FURNISHING ALL EQUIPMENT, CABLES, ADDITIONAL CONDUITS, RACEWAYS, AND OTHER ACCESSORIES NECESSARY FOR A COMPLETE AND OPERATIONAL PV SYSTEM.
5	ALL EXPOSED PV ROOFTOP CONDUCTORS NOT UNDER THE ARRAY SHALL BE PROTECTED BY A RACEWAY WITH A LISTED JUNCTION BOX AT BOTH ENDS AND COMPLY WITH NEC 690.31(A).

- 1(N) PROPOSED ROOF-MOUNTED PV ARRAY. FLAT ROOF. (7) Q-CELLS Q.TRON BLK M-G2+ AC 430 MODULES (BLACK FRAME, BLACK BACKSHEET), 0° AZIMUTH.
- 2(N) PROTECTED LOADS PANEL (PAN1), OUTDOOR
- 3(N) BACKUP GATEWAY (MID), OUTDOOR
- 4(N) VISIBLE-OPEN TYPE, LOCKABLE, READILY ACCESSIBLE, LABELED UTILITY DISCONNECT LOCATED WITHIN 10 FT. OF UTILITY METER (SW1), OUTDOOR
- 5(N) ENERGY STORAGE, OUTDOOR
- 6(N) AC COMBINER (C1), OUTDOOR
- 7(N) TRANSITION BOX, OUTDOOR, OUTPUT CIRCUIT CONDUCTORS SHALL BE RUN IN LFMC CONDUIT THROUGH THE INTERIOR OF THE BUILDING
- 8(E) MAIN SERVICE PANEL (MSP), OUTDOOR
- 9(N) PROPOSED ROOF-MOUNTED PV ARRAY. 5/12 (24.0°) SLOPED ROOF. (10) Q-CELLS Q.TRON BLK M-G2+ AC 430 MODULES (BLACK FRAME, BLACK BACKSHEET), 180° AZIMUTH.
- 10(E) UTILITY METER, OUTDOOR
- 11(N) PROPOSED ROOF-MOUNTED PV ARRAY. FLAT ROOF. (7) Q-CELLS Q.TRON BLK M-G2+ AC 430 MODULES (BLACK FRAME, BLACK BACKSHEET), 180° AZIMUTH.
- 12ROADWAY
- 13ALL ARRAY CIRCUITS SHALL BE ROUTED THROUGH THE INTERIOR OF THE BUILDING, AND WHERE POSSIBLE, ALONG THE BOTTOM OF LOAD BEARING MEMBERS. NO CONDUIT SHALL BE INSTALLED ABOVE THE ROOF.

P-1E3030	
GRID-TIED PV SYSTEM	PFOUTS RESIDENCE 1435 NE 24TH ST OCALA, FL 34470
SITE PLAN	
DOC ID: 52318D-3	
DATE: 5/13/25	
CREATOR: S.S.	
REVIEWER:	
REVISIONS	
PV-2	

Solar Simplified.



qcells



Q.TRON AC

Q.TRON BLK M-G2+/AC



Q.TRON AC

AC module powered by
Q.ANTUM NEO Technology



Module-Level Monitoring & Control

- Easily and intelligently monitor system performance at the module level using the Q.OMMAND PRO App for installers
- Homeowners have PV production visibility at their fingertips with the user friendly Q.OMMAND HOME App
- Enhanced communications performance, thanks to high-bandwidth PLC communication technology



Streamlined Installation & Product Management

- Fast installation enabled by integrated Qcells microinverter
- QR codes on both module and embedded microinverter allow installer to map out arrays in the Q.OMMAND Pro app pre- or post-installation
- Improved inventory management enabled by reduced SKU counts and one complete module and MLPE solution by the same brand
- Seamlessly couples with Qcells' residential energy storage system to form one complete Q.HOME SMART system



Top Quality Customer Support & Post-Sales Servicing

- Top tier, responsive customer support offered by Qcells for rapid system troubleshooting
- Detachable microinverter simplifies onsite maintenance when required
- Inbound module and microinverter related inquiries all supported by one brand



Superior Module Performance

- Q. TRON AC is powered by Q.ANTUM NEO Technology, delivering up to 22.0 % efficiency
- Lowest module degradation rate compared with Tier 1 TOPCon competitors, translating to more power production over time (90%+ nominal power guaranteed after 25 years)



Dependably Backed by One Warrantor

- Inclusive 25-year product warranty and 25-year linear performance warranty
- Integrated module & microinverter solution backed by one bankable, leading complete solutions provider



USA Manufacturing


- Module and microinverter both assembled in the USA by America's No.1 residential module manufacturer

Description

The Q.TRON AC SERIES is a N-Type TOPCon PV module with an integrated microinverter. The module, with its embedded microinverter, provides optimized power output while also acting as a rapid shutdown compliant solution for optimal system safety. The solution includes a microinverter, DC cables and a junction box, enabling a streamlined installation experience.

Mechanical Specification

Format	67.8 in × 44.6 in × 1.57 in (including frame) (1722 mm × 1134 mm × 40 mm)
Weight	50.6 lbs (23 kg)
Front Cover	0.13 in (3.2 mm) thermally pre-stressed ARC solar glass
Back Cover	Composite film
Frame	Black anodized aluminum
Cell	6 × 18 monocrystalline Q.ANTUM NEO solar half cells
Junction Box	2.09-3.98 in × 1.26-2.36 in × 0.59-0.71 in (53-101 mm × 32-60 mm × 15-18 mm). Protection class IP67, with bypass diodes
Cable	4 mm ² Solar cable; (+) ≥25.8 in (655 mm), (-) ≥25.2 in (640 mm)
Connector	Stäubli MC4; IP68

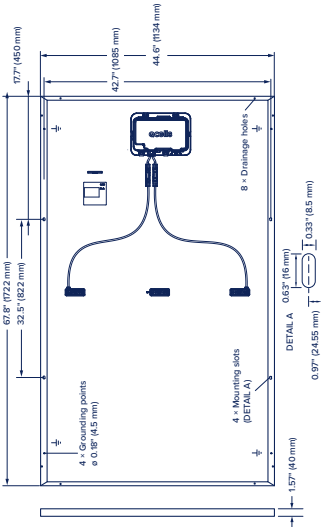

AC Output Electrical Characteristics

Q.MI.349B-G1 (Model Name)			
Peak Output Power	[VA]	366	Power Factor (adjustable) 0.85 leading... 0.85 lagging
Max Continuous Output Power	[VA]	349	Max. number of AC Modules per Q.HOME COMBINER 80 G1 [ea] 44 (Q.HOME COMBINER CB : Max 4)
Nominal (L-L) Voltage / Range	[V]	240 / 211 to 264	Max Units per 20 A (L-L) Branch Circuit [ea] 11
Nominal Rated Output Current	[A]	1.45	Total Harmonic Distortion [%] <5
Nominal Frequency / Range	[Hz]	60 / 59.3 to 60.5	Overvoltage Class AC Port III
Extended Frequency Range	[Hz]	50 to 66	Night-Time Power Consumption [mW] 60
Power Factor at Rated Power		1.0	CEC Efficiency [%] 97

Electrical Characteristics


POWER CLASS	415	420	425	430	435	440
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC ¹ (POWER TOLERANCE +5W / -0 W)						
Power at MPP ¹	P _{MPP} [W]	415	420	425	430	435
Short Circuit Current ¹	I _{SC} [A]	13.49	13.58	13.66	13.74	13.82
Open Circuit Voltage ¹	V _{OC} [V]	38.47	38.75	39.03	39.32	39.60
Current at MPP	I _{MPP} [A]	12.83	12.91	12.98	13.05	13.13
Voltage at MPP	V _{MPP} [V]	32.34	32.54	32.74	32.94	33.14
Efficiency ¹	η [%]	≥21.3	≥21.5	≥21.8	≥22.0	≥22.3

MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT²

Power at MPP	P _{MPP} [W]	313.7	317.5	321.2	325.0	328.8	332.6
Short Circuit Current	I _{SC} [A]	10.87	10.94	11.00	11.07	11.14	11.20
Open Circuit Voltage	V _{OC} [V]	36.50	36.77	37.04	37.31	37.58	37.84
Current at MPP	I _{MPP} [A]	10.10	10.15	10.21	10.27	10.33	10.38
Voltage at MPP	V _{MPP} [V]	31.07	31.26	31.46	31.65	31.84	32.03


¹Measurement tolerances P_{MPP} ±3%; I_{SC}, V_{OC} ±5 % at STC: 1000W/m², 25±2 °C, AM 1.5 according to IEC 60904-3 • ²800W/m², NMOT, spectrum AM1.5

Qcells PERFORMANCE WARRANTY



At least 98.5 % of nominal power during first year. Thereafter max. 0.33 % degradation per year. At least 95.53 % of nominal power up to 10 years. At least 90.58 % of nominal power up to 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Qcells sales organisation of your respective country.



Typical module performance under low irradiance conditions in comparison to STC conditions (25°C, 1000W/m²).

TEMPERATURE COEFFICIENTS

Temperature Coefficient of I_{sc}	α	[%/K]	+0.04	Temperature Coefficient of V_{oc}	β	[%/K]	-0.24
Temperature Coefficient of P_{MPP}	γ	[%/K]	-0.30	Nominal Module Operating Temperature	NMOT		
						(°F)	109±5.4 (43±3 °C)

qcells

Solar Simplified.



Q.HOME COMBINER

Q.HOME COMBINER 80 G1

Q.HOME COMBINER

Combiner Box of the Q.HOME SMART Residential Energy Solution



Flexible

Network connectivity with Wi-Fi, Ethernet or Cellular



Consolidated

80A total PV and storage branch circuits



Robust

NRTL-certified NEMA type 3R enclosure rated for outdoor installation



Streamlined

Pre-installed revenue grade production meter, with a pair of slim clamp CTs for consumption metering



Reliable

- 5-year warranty
- Automatic firmware updates



Complete

- Part of Qcells' complete Q.HOME SMART solution offering
- One brand. One warrantor

Description

The Q-HOME COMBINER 80 G1 consolidates up to 4 PV strings with a maximum of 44 AC Modules connected into a single enclosure. This enables a smooth interconnection across Q-HOME SMART products while ensuring easy and fast installations. Save time and costs by incorporating this user-friendly combiner box, optimally designed for residential applications. Contact Qcells Customer Support if it is desired to install more than 44 AC Modules.

Technical Specification

GENERAL PRODUCT INFORMATION		Q.HOME COMBINER 80 G1	
Manufacturer		Hanwha Solutions Corporation	
Product Warranty		5 years	
Country of Manufacturer		Vietnam	
ACCESSORIES AND REPLACEMENT PARTS			
Supported AC Modules (Microinverter included)		Q1TRON BLK M-G2+/AC	
Cellular Modem (LTE-MT-MODEM-CAT4-TN15)		4G based LTE-CAT4 (+5-year data plan included)	
WiFi Dongle (WiFi-HQ-DG-USB)		FCC Part 15 Subpart C /2412.0 to 2462.0MHz **	
Circuit Breakers		Supports Eaton BR210, BR215, BR220, BR230, BR240, BR250, and BR260 circuit breakers	
Consumption Monitoring CT (CT-JS-CLAMP-200A-5.2m)		A pair of 200A clamp type current transformers (accuracy ±0.5%) ** * pre-assembled / ** included in the package (Others are not included, need to be ordered separately)	
ELECTRICAL SPECIFICATIONS			
System Voltage		[V]	120/240 VAC, 60 Hz
Eaton BR Series Busbar Rating		[A]	125
Max. Continuous Current Rating (input from PV / storage)		[A]	64
Max. Fuse /Circuit Rating (output)		[A]	90
Branch Circuits (solar and/ or storage)		[pcs]	Up to four 2-pole Eaton BR series Distributed Generation (DG) breakers only (not included)
Max. Total Branch Circuit Breaker Rating (input)		[A]	80A of distributed generation/95A with Gateway breaker included
Gateway Circuit Breaker		[A]	15A rating Eaton included
Consumption Monitoring		[A]	Metering with a pair of 200A split core current transformers (accuracy ±2.0%)
Production Metering		[A]	Metering with 200A solid core current transformer pre-wired to Gateway (accuracy ±0.5%)
MECHANICAL DATA			
Max. AC Module Connection Q'ty		[pcs]	Up to 44 AC Modules (11 in series × 4 strings)
Dimensions (W × H × D)		[inch]	14.6 × 19.3 × 6.3/height is 21.7 with mounting brackets (37.0 × 49.0 × 16.0 cm /height is 55.1cm with mounting brackets)
Weights (without connection cables)		[lb]	11.5 (5.2 kg)
Operating Temperature Range		[°F]	−40 to 140 [−40 to 60 °C]
Storage Temperature Range		[°F]	−40 to 140 [−40 to 60 °C]
Enclosure Environmental Rating			Outdoor, NRTL-certified, NEMA type 3R, polycarbonate construction
Wire Sizes			■ 20 A breaker inputs: 12 to 8 AWG copper conductors ■ Main lug combined output: 10 to 2/0 AWG copper conductors ■ Neutral and ground: 8 to 6 copper conductors ■ Always follow local code requirements for conductor sizing
Cooling			Natural convection
Altitude		[m]	Up to 2,000 (6,561 feet)
INTERNET CONNECTION OPTIONS			
Wi-Fi		IEEE 802.11b/g/n	
Cellular		CELLMODEM-CAT4 (4G based LTE-CAT4)	
Ethernet		Optional, IEEE 802.3, CAT5E (or CAT6) UTP Ethernet cable	
COMPLIANCE			
AC Combiner		■ UL 1741, CSA C22.2 No.107 ■ FCC Part 15.B ■ ANSI C 12.20 accuracy class 0.5 (production meter) ■ NEMA type 3R ■ IEEE 2030.5 / CSIP Compliant	
Monitoring board		UL 61010-1 / UL 61010-2-030 CSA 22.2 No. 61010-1:2 / CSA 22.2 No. 61010-2-030	

FRANKLINWH

aPower 2

AC-coupled battery

Store solar generated power while the sun is shining. Use the stored energy when needed to lower electric bills. Run heavy loads such as air conditioners and water heaters as usual even during grid outages. Provide homeowner peace of mind by fully charging before severe weather events.

The system is off-grid ready, designed to operate independently from the main power grid to deliver reliable energy in any situation.

- ✓ 10 kW continuous / 15 kW peak for 10s
- ✓ 8 kW charge power
- ✓ 15 kWh AC¹ per unit, up to 225 kWh (15 units) per aGate
- ✓ 60 MWh warranty throughput

PERFORMANCE SPECIFICATIONS

SKU	APR-10K15V2-US				
Name	aPower 2				
Nameplate Model	aPower X-20				
Certification / DEC Listing Name	aPower Xyvy				
Battery Chemistry	Lithium Iron Phosphate (LFP)				
Usable System Energy	15 kWh AC ¹ per unit, up to 15 units per aGate				
Aggregate Throughput	60 MWh				
Real Power (charge)	8 kW continuous				
Nominal Output Power (AC)	2.5 kW	5 kW	6.7 kW	8.4 kW	10 kW ²
Maximum Apparent Power	2.9 kVA	5.8 kVA	7.7 kVA	9.6 kVA	11.5 kVA
Maximum Continuous Current	12 A	24 A	32 A	40 A	48 A
Nominal AC Voltage	120 / 240 V, 120 / 208 V (single phase), 60 Hz				
Coupling	AC-coupled				
Phase	2 W+N+PE				
Round Trip Efficiency	90%				
Maximum Short-Circuit Current Rating	10 kA				
Load Start Capability	185 A LRA				
Work Modes	Self-Consumption Time of Use Emergency Backup				
Noise Emission	30 dB(A) Typical / 45 dB(A) Maximum				
Flood Resistance	Up to 29" from the aPower 2 base				
User Interface	FranklinWH App				
Warranty	15 years ³				

COMPLIANCE INFORMATION

Certifications	UL 9540, UL 9540A, UL 1973, UL 1741, UL1741SB, UL 1741 PCS, UL 60730-1, IEEE 1547, IEEE 1547.1, UN 38.3, CSA C22.2 No. 107.1
Seismic	AC 156, OSHPD, IEEE 693-2005 (high)
Environmental	California Proposition 65 RoHS Directive 2011 / EU
Emissions	FCC Part 15 Class B, ICES 003

- At beginning of life, 3 kW charge/discharge power, 77 °F (25 °C).
- Refer to the installation manual and commissioning guide for proper wire and OCPD sizes.
- For more details, please refer to the FranklinWH System Limited Warranty for End Users available in the Documentation Center on the FranklinWH website.

WWW.FRANKLINWH.COM

FRANKLINWH

aGate

Intelligent energy management system

Serves as the controller for all home power sources by interconnecting solar, grid, batteries, and a standby generator to supply electricity to the home. Seamlessly transitions the home supply from grid power to backup power so that always-on appliances, such as the refrigerator and network router, will not be affected when grid goes down.

- ✓ Micro-grid interconnect device (MID)
- ✓ Integrated PV and grid metering
- ✓ Auto load-shedding


- ✓ Compatible with micro and string solar inverter
- ✓ Optional Smart-Circuits Module
- ✓ Optional Generator Module

PERFORMANCE SPECIFICATIONS

Model Number	aGate X	
Coupling	AC-coupled	
Nominal AC Voltage	120 / 208 V, 120 / 240 V, 60 Hz	
Phase	2 W+N+PE	
aPower Over Current Protection Device	100 A Max	
Solar Input Over Current Protection Device	80 A Max	
Backup Load Port Over Current Protection Device	200 A Max	
Generator Over Current Protection Device ¹	200 A Max	
Smart Circuits Over Current Protection Device ²	Opt. a 1 x 80 A Max @ 208 V / 240 V & 1 x 50 A Max @ 208 V / 240 V	
	Opt. b 1 x 80 A Max @ 208 V / 240 V & 2 x 50 A Max @ 120 V	
Maximum Supply Fault Current	20 kA	
Busbar Rating	280 A	
Work Modes	Self-Consumption, Time of Use, Emergency Backup	
Communications	Ethernet / 4G / Wifi	
User Interface	FranklinWH App	
Warranty	12 years	

MECHANICAL SPECIFICATIONS

Dimensions (H x W x D)	31.5 in x 21.7 in x 6.3 in (800 mm x 550 mm x 160 mm)
Weight	50 lb (23 kg)
Mounting	Wall mount or floor mount

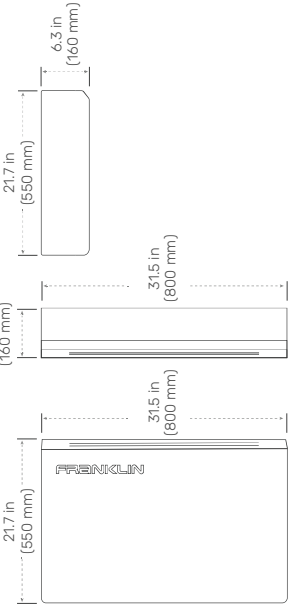

ENVIRONMENTAL SPECIFICATIONS

Enclosure Type	NEMA 3R
Operating Temperature	-4°F to 122°F (-20°C to 50°C)
Operating Humidity (RH)	Up to 100% RH, condensing
Altitude	Maximum 9,843 ft (3,000 m)
Environment	Indoor and outdoor rated

COMPLIANCE INFORMATION

Certifications	UL 1741 ¹ , UL 1741 PCS ³ , UL 67 ¹ , UL 869A ¹ , UL 916 ¹ , CAN/CSA C22.2 No. 107.1-16, CSA C22.2 No. 0.19
Seismic	AC 156, OSHPD, IEEE 693-2005 (high)
Environmental	California Proposition 65 RoHS Directive 2011 / EU
Emissions	FCC Part 15 Class B, ICES 003


- Generator Module is optional.
- Smart Circuit Module is optional.
- Sections from these standards were used during the safety evaluation and included in the UL 1741 listing.

WWW.FRANKLINWH.COM



MECHANICAL SPECIFICATIONS

Dimensions (H x W x D)	45.2 in x 29.5 in x 11.8 in (1149 mm x 750 mm x 300 mm)
Weight, aPower 2 Complete	357 lb. (162 kg)
Weight, without Cover	335 lb. (152 kg)
Weight, Cover	22 lb. (10 kg)
Mounting	Wall or floor mount
Cooling	Natural air-cooled design

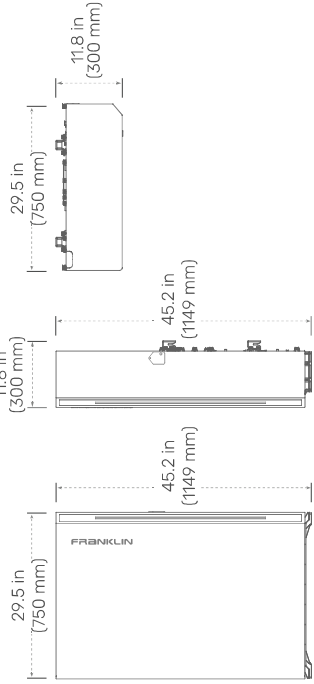

ENVIRONMENTAL SPECIFICATIONS

Enclosure Type	Type 3R
Ingress Protection	IP67 (Battery Pack & Inverter) IP56 (Wiring)
Operating Temperature	Operates up to 131° F (55 °C) at 5kW derated output -4 °F to 122 °F (-20 °C to 50 °C)
Operating Humidity (RH)	Up to 100% RH, condensing
Altitude	Maximum 9,843 ft (3,000 m)
Environment	Indoor and outdoor rated

Compatibility Notice: At launch, the aPower 2 is compatible with the aGate 1.3 only. Compatibility with earlier aGate and aPower versions is anticipated by the end of Q2 2025.

Copyright 2025 FranklinWH Energy Storage Inc. All rights reserved. The Franklin logo, FranklinWH, and other trademarks or service names are the trademarks of FranklinWH Energy Storage Inc. The document is for informational purposes only, data subject to change. 2025-3-31


Certificate Of Completion

Envelope Id: 77A11D5A-7F7E-4BFD-AEDD-FE751F0407B8	Status: Completed
Subject: SIGNATURE: Net-Metering Agreement - Ryan Pfouts (ELE/250966)	
Source Envelope:	
Document Pages: 28	Signatures: 5
Certificate Pages: 5	Initials: 0
AutoNav: Enabled	Envelope Originator:
Envelopeld Stamping: Enabled	April Adolf
Time Zone: (UTC-05:00) Eastern Time (US & Canada)	110 SE Watula Avenue
	City Hall, Third Floor
	Ocala, FL 34471
	aadolf@ocalafl.gov
	IP Address: 216.255.240.104

Record Tracking

Status: Original	Holder: April Adolf	Location: DocuSign
9/4/2025 5:40:45 PM	aadolf@ocalafl.gov	
Security Appliance Status: Connected	Pool: StateLocal	
Storage Appliance Status: Connected	Pool: City of Ocala - Procurement & Contracting	Location: Docusign


Signer Events

Signer Events	Signature	Timestamp
William E. Sexton, Esq. wsexton@ocalafl.gov City Attorney Security Level: Email, Account Authentication (None)	Signed by:  4A55AB8A8ED04F3... Signature Adoption: Pre-selected Style Using IP Address: 216.255.240.104	Sent: 9/4/2025 5:54:34 PM Viewed: 9/5/2025 11:32:19 AM Signed: 9/5/2025 11:34:57 AM

Electronic Record and Signature Disclosure:
Accepted: 9/15/2023 9:02:35 AM
ID: 313dc6f2-e1d0-44c3-8305-6c087d6cdf0b

Janice Mitchell jmitchell@Ocalafl.org CFO City of Ocala Security Level: Email, Account Authentication (None)	Signed by:  55198B43858A4E1... Signature Adoption: Pre-selected Style Using IP Address: 216.255.240.104	Sent: 9/5/2025 11:34:58 AM Viewed: 9/8/2025 7:37:37 AM Signed: 9/8/2025 7:38:15 AM
--	---	---

Electronic Record and Signature Disclosure:
Accepted: 9/8/2025 7:37:37 AM
ID: abfdd018-cd60-4e0e-ac75-5875219c7817

Chris Gowder chris.gowder@fmpa.com Chief Sys Ops & Tech Officer Security Level: Email, Account Authentication (None)	DocuSigned by:  087F58EBB34B474... Signature Adoption: Uploaded Signature Image Using IP Address: 2600:387:15:2812::b Signed using mobile	Sent: 9/8/2025 7:38:17 AM Viewed: 9/8/2025 8:15:39 AM Signed: 9/8/2025 8:16:00 AM
---	---	--

Electronic Record and Signature Disclosure:
Accepted: 9/8/2025 8:15:39 AM
ID: 91d5726e-e8b9-4be9-8b67-aaa84fe7f1c1

In Person Signer Events	Signature	Timestamp
Editor Delivery Events	Status	Timestamp
Agent Delivery Events	Status	Timestamp
Intermediary Delivery Events	Status	Timestamp

Certified Delivery Events	Status	Timestamp
Carbon Copy Events	Status	Timestamp
Witness Events	Signature	Timestamp
Notary Events	Signature	Timestamp
Envelope Summary Events	Status	Timestamps
Envelope Sent	Hashed/Encrypted	9/4/2025 5:54:34 PM
Certified Delivered	Security Checked	9/8/2025 8:15:39 AM
Signing Complete	Security Checked	9/8/2025 8:16:00 AM
Completed	Security Checked	9/8/2025 8:16:00 AM
Payment Events	Status	Timestamps
Electronic Record and Signature Disclosure		

ELECTRONIC RECORD AND SIGNATURE DISCLOSURE

From time to time, City of Ocala - Procurement & Contracting (we, us or Company) may be required by law to provide to you certain written notices or disclosures. Described below are the terms and conditions for providing to you such notices and disclosures electronically through the DocuSign system. Please read the information below carefully and thoroughly, and if you can access this information electronically to your satisfaction and agree to this Electronic Record and Signature Disclosure (ERSD), please confirm your agreement by selecting the check-box next to 'I agree to use electronic records and signatures' before clicking 'CONTINUE' within the DocuSign system.

Getting paper copies

At any time, you may request from us a paper copy of any record provided or made available electronically to you by us. You will have the ability to download and print documents we send to you through the DocuSign system during and immediately after the signing session and, if you elect to create a DocuSign account, you may access the documents for a limited period of time (usually 30 days) after such documents are first sent to you. After such time, if you wish for us to send you paper copies of any such documents from our office to you, you will be charged a \$0.00 per-page fee. You may request delivery of such paper copies from us by following the procedure described below.

Withdrawing your consent

If you decide to receive notices and disclosures from us electronically, you may at any time change your mind and tell us that thereafter you want to receive required notices and disclosures only in paper format. How you must inform us of your decision to receive future notices and disclosure in paper format and withdraw your consent to receive notices and disclosures electronically is described below.

Consequences of changing your mind

If you elect to receive required notices and disclosures only in paper format, it will slow the speed at which we can complete certain steps in transactions with you and delivering services to you because we will need first to send the required notices or disclosures to you in paper format, and then wait until we receive back from you your acknowledgment of your receipt of such paper notices or disclosures. Further, you will no longer be able to use the DocuSign system to receive required notices and consents electronically from us or to sign electronically documents from us.

All notices and disclosures will be sent to you electronically

Unless you tell us otherwise in accordance with the procedures described herein, we will provide electronically to you through the DocuSign system all required notices, disclosures, authorizations, acknowledgements, and other documents that are required to be provided or made available to you during the course of our relationship with you. To reduce the chance of you inadvertently not receiving any notice or disclosure, we prefer to provide all of the required notices and disclosures to you by the same method and to the same address that you have given us. Thus, you can receive all the disclosures and notices electronically or in paper format through the paper mail delivery system. If you do not agree with this process, please let us know as described below. Please also see the paragraph immediately above that describes the consequences of your electing not to receive delivery of the notices and disclosures electronically from us.

How to contact City of Ocala - Procurement & Contracting:

You may contact us to let us know of your changes as to how we may contact you electronically, to request paper copies of certain information from us, and to withdraw your prior consent to receive notices and disclosures electronically as follows:

To contact us by email send messages to: contracts@ocalafl.org

To advise City of Ocala - Procurement & Contracting of your new email address

To let us know of a change in your email address where we should send notices and disclosures electronically to you, you must send an email message to us at contracts@ocalafl.org and in the body of such request you must state: your previous email address, your new email address. We do not require any other information from you to change your email address.

If you created a DocuSign account, you may update it with your new email address through your account preferences.

To request paper copies from City of Ocala - Procurement & Contracting

To request delivery from us of paper copies of the notices and disclosures previously provided by us to you electronically, you must send us an email to contracts@ocalafl.org and in the body of such request you must state your email address, full name, mailing address, and telephone number. We will bill you for any fees at that time, if any.

To withdraw your consent with City of Ocala - Procurement & Contracting

To inform us that you no longer wish to receive future notices and disclosures in electronic format you may:

- i. decline to sign a document from within your signing session, and on the subsequent page, select the check-box indicating you wish to withdraw your consent, or you may;
- ii. send us an email to contracts@ocalafl.org and in the body of such request you must state your email, full name, mailing address, and telephone number. We do not need any other information from you to withdraw consent.. The consequences of your withdrawing consent for online documents will be that transactions may take a longer time to process..

Required hardware and software

The minimum system requirements for using the DocuSign system may change over time. The current system requirements are found here: <https://support.docusign.com/guides/signer-guide-signing-system-requirements>.

Acknowledging your access and consent to receive and sign documents electronically

To confirm to us that you can access this information electronically, which will be similar to other electronic notices and disclosures that we will provide to you, please confirm that you have read this ERSD, and (i) that you are able to print on paper or electronically save this ERSD for your future reference and access; or (ii) that you are able to email this ERSD to an email address where you will be able to print on paper or save it for your future reference and access. Further, if you consent to receiving notices and disclosures exclusively in electronic format as described herein, then select the check-box next to 'I agree to use electronic records and signatures' before clicking 'CONTINUE' within the DocuSign system.

By selecting the check-box next to 'I agree to use electronic records and signatures', you confirm that:

- You can access and read this Electronic Record and Signature Disclosure; and
- You can print on paper this Electronic Record and Signature Disclosure, or save or send this Electronic Record and Disclosure to a location where you can print it, for future reference and access; and
- Until or unless you notify City of Ocala - Procurement & Contracting as described above, you consent to receive exclusively through electronic means all notices, disclosures, authorizations, acknowledgements, and other documents that are required to be provided or made available to you by City of Ocala - Procurement & Contracting during the course of your relationship with City of Ocala - Procurement & Contracting.